





INNOVATIVE ARCHITECTURAL SOLUTIONS HIGH PERFORMANCE SYSTEMS NEW EXPRESSIVE POSSIBILITIES

Atena has been conceiving and manufacturing false ceilings, external coverings and high quality marine fittings for over 30 years, producing in its factory in Italy and distributing in over fifty countries, through its dealers and partners.

Without any limit to the technical development, Atena offers innovative solutions to transform the designers vision into real works, all over the world. It stands out for the capability to make executive the most challenging projects by creating special metal bodies for interior and façade architecture.

In addition to the commercial synergies with different European realities, and not only, Atena cooperates with designers and construction companies, following customers at all levels from the idea to the installation; providing a qualified executive design service and specialized consultancy in acoustics, lighting and seismic engineering.

HIGH TECHNICAL PERFORMANCE **CERTIFIED SYSTEMS CUSTOM MADE SOLUTIONS**

ATENA HJ

Atena H⁺ is the Atena metal ceiling range properly conceived to meet the specific requirements of healthcare, chemical, pharmaceutical and microelectronics industries where high levels of cleanliness, safety and environmental comfort are required.

A complete range of high-performance metal ceilings, integrated with the Atena Lux lightings to achieve the best technical result in all application field, from controlled atmosphere environments such as clean rooms and operating theaters, to areas with low risk of contamination such as waiting areas and halls.

Atena H⁺ is synonymous of air-tightness, resistance to chemical corrosion, high levels of hygiene thanks to the antimicrobial properties of Defence H⁺ materials, as well as ISO 2-certified air cleanliness of Syncro Evo systems.

Atena H⁺ the best performance for the highest environmental quality.

		Picture: "Air-1	ight Enigma Syncro XL" metal ceiling custom made lighting by Atena
			ATENAH*
		8	24 SYNCRO EVO
Start X - / Start		12	35 SYNCRO EVO
		14	AIR-TIGHT MATROX
		18	AIR-TIGHT ENIGMA SYNCRO >
A PARTICIPAL AND A PART		22	LAY-IN CLIP-IN SYSTEMS
		28	CLEAN ROOMS SYSTEMS
		30	AIR-TIGHT SYSTEMS
		31	ANTIMICROBIAL FEATURES
		32	INTEGRATED LIGHTINGS
	2	34	ANTISEISMIC SYSTEMS
		36	PRODUCT SELECTOR
ATENA-IT.COM		38	CERTIFICATIONS
		MIL	

o XL" metal ceiling | custom made lighting by Atena Lux

NA H⁺

TIGHT ENIGMA SYNCRO XL

CLEAN ROOMS CEILINGS

SYNCRO EVO

ISO 2 certified

24 Syncro Evo 35 Syncro Evo



Fraunhofer TESTED[®] DEVICE ATENA S.P.A. HP93 Report No. AT 1907-1124


Pictures: "24 Syncro Evo" metal ceiling | "Ate_Taurus Evo" lighting by Atena Lux

• 78

ATENA H⁺

. .



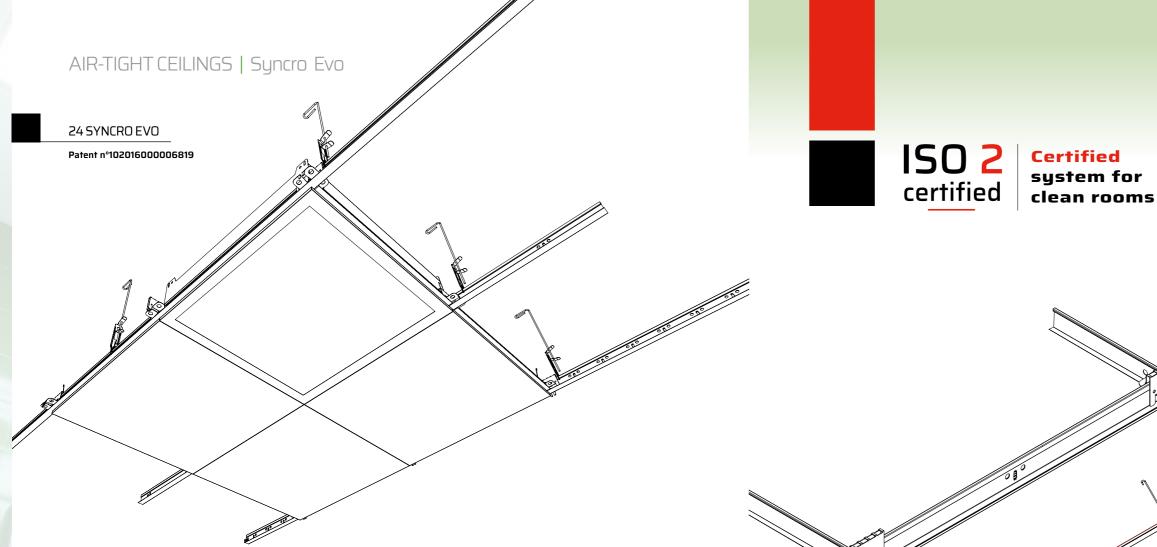

FEATURES

PANELS' FEATURES

24 Syncro Evo spring panels Right edge | Shaped edges to apply air-tight gasket and corners 600x600 | 600x1200 | 300x600 | 300x1200 mm other dimensions on request

PANELS' MATERIALS Steel 5/10 | 6/10 Aluminum 8/10

HIDDEN STRUCTURE Steel Strong Easy T24 | Easy Antiseismic T24

ANTI-SEISMIC EQUIPMENTS

Atena Antiseismic Kit for $\leq 1,2$ m plenum Atena Antiseismic Kit for > 1,2 m high plenum Compulsory for buildings in 3 and 4 Class (NTC 2018 - § 7.2.3)

HANGERS

Twister, Nonius, Standard with spring, 90° hanger

COLORS

Atena white, Atena silver pre-painted aluminum Atena white, Atena silver pre-painted steel RAL / NCS coatings

FINISHING

Plain surface Sublimation of images and effects Antimicrobial treatment (**Defence H***)

WALL ANGLES


"L" Syncro Evo with air-tight gasket to apply on site


ACCESSORIES ATE_TAURUS EVO IP65

ATE_TAURUS EVO IP65 integrated lighting by Atena Lux


System components
















Easy T24

Syncro Evo

spring



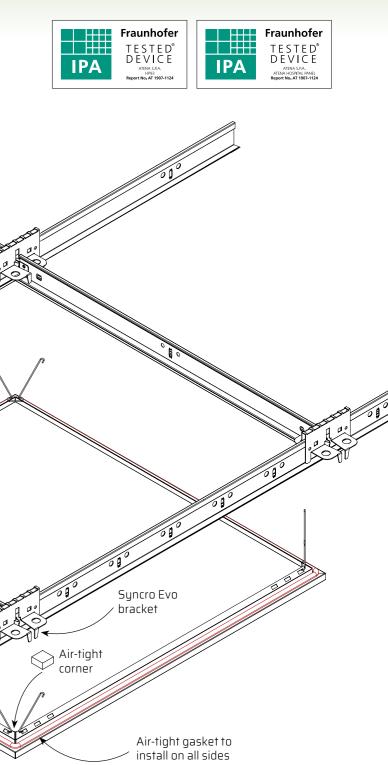

AIR-TIGHT CEILINGS | Syncro Evo

35 SYNCRO EVO

Patent nº102016000108127

ISO 2

Certified system for

FEATURES

PANELS' FEATURES

35 Syncro Evo spring panels Right edge | Shaped edges to apply air-tight gasket and corners 600x600 | 600x1200 | 300x600 | 300x1200 mm other dimensions on request

PANELS' MATERIALS Steel 5/10 | 6/10 Aluminum 8/10

HIDDEN STRUCTURE Steel Strong Base 35 with punched 1200 mm profile

ANTI-SEISMIC EQUIPMENTS

Atena Antiseismic Kit for ≤ 1,2 m plenum Atena Antiseismic Kit for > 1,2 m high plenum Compulsory for buildings in 3 and 4 Class (NTC 2018 - § 7.2.3)

HANGERS

Twister, Nonius, Standard with spring, 90° hanger

COLORS

Atena white, Atena silver pre-painted aluminum Atena white, Atena silver pre-painted steel RAL/NCS coatings

FINISHING

Plain surface Sublimation of images and effects Antimicrobial treatment (**Defence H***)

WALL ANGLES

"L" Syncro Evo with air-tight gasket to apply on site

ACCESSORIES

ATE_TAURUS EVO IP65 integrated lighting by Atena Lux


System components

T-GRID 3700 mm h38 1200 mm h38 600 mm h38













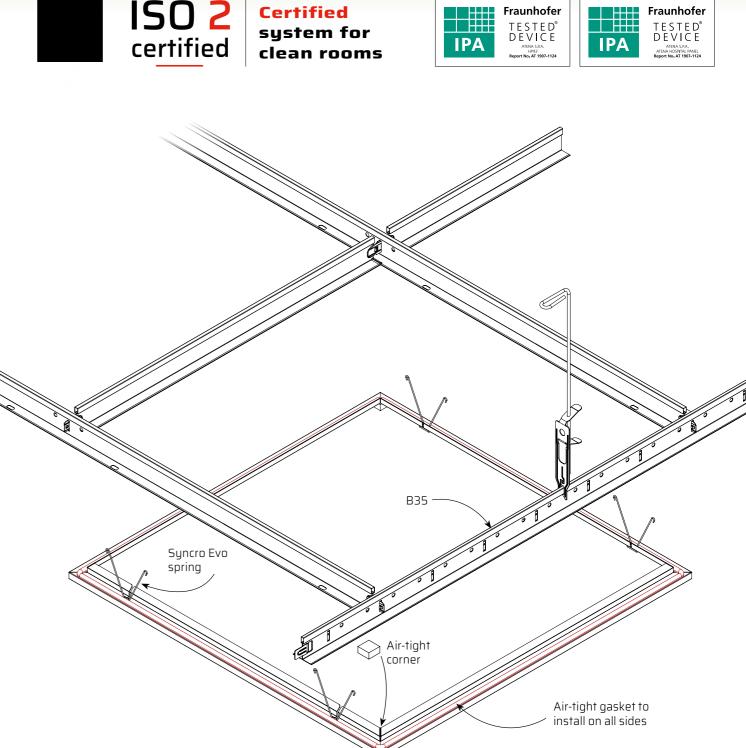

ATENA LUX ATE_TAURUS EVO IP65 | ISO 2 - ISO 14644-1 INTEGRATED LIGHTING





DEFENCE H⁺ ANTIMICROBIAL RANGE



CEILINGS SYSTEMS

AIR-TIGHT MATROX

Aitr-tight Matrox models


ATENA H⁺


Picture: "Matrox" metal ceiling | "Wall Decò" sublimated metal counter wall "Ate_Taurus/N" lighting and "Sense" bed head beam by Atena Lux

14



1=1

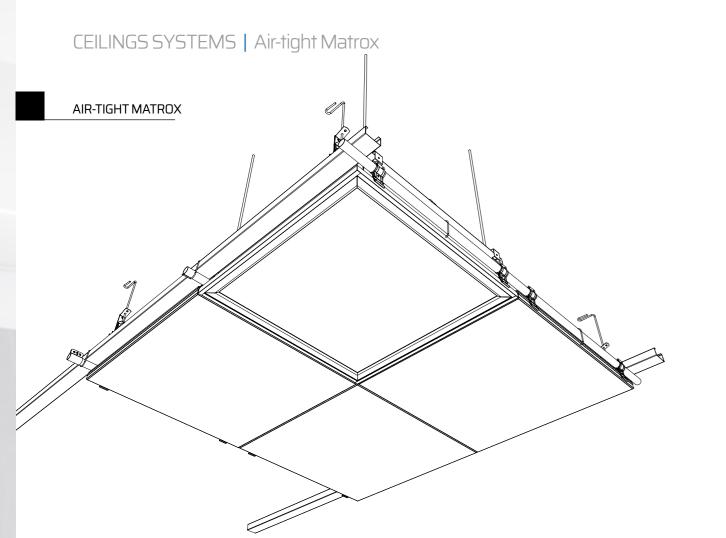

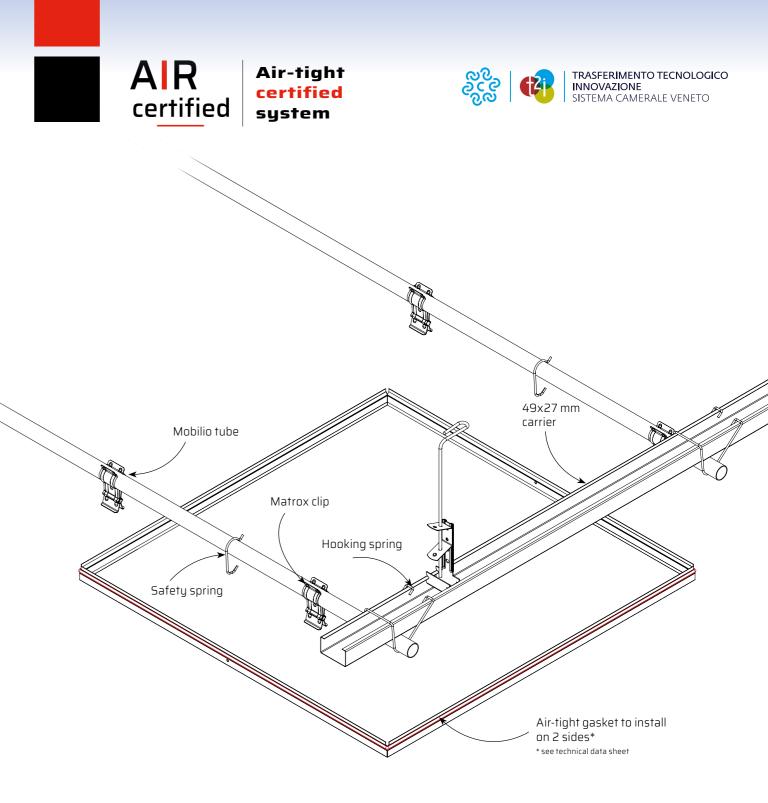

FEATURES

PANELS' FEATURES

Matrox hooking panels Right or 45° bevelled edge Shaped edges to apply air-tight gasket 600x600 mm other dimensions on request

PANELS' MATERIALS Steel 5/10 | 8/10 Stainless steel 5/10 | 6/10 Aluminum 6/10 | 8/10

HIDDEN STRUCTURE Matrox

ANTI-SEISMIC EQUIPMENTS Atena Antiseismic Kit for ≤ 1,2 m plenum Atena Antiseismic Kit for > 1,2 m plenum Atena Antiseismic Kit for > 1,2 m high plenum Compulsory for buildings in 3 and 4 Class (NTC 2018 - § 7.2.3)

HANGERS Spring hook hanger | Nonius

COLORS

Atena white, Atena silver pre-painted aluminum Atena white, Atena silver pre-painted steel RAL/NCS coatings

FINISHING

Plain surface Sublimation of images and effects Antimicrobial treatment (Defence H*)


WALL ANGLES

"C" 25x33x18 mm with "omega" spring and air-tight gasket to apply on site


ACCESSORIES

ATE_TAURUS/N IP65 integrated lighting by Atena Lux MATROX STRUCTURE ¥

System components



0



ဂျို

ATENA LUX ATE_TAURUS/N IP65 INTEGRATED LIGHTING







CEILING SYSTEMS AIR-TIGHT ENIGMA SYNCROXL

Air-tight Enigma Syncro XL models

ATENA H⁺

Picture: "Air-tight Enigma Syncro XL" metal ceiling | custom made lighting by Atena Lux


††

18



CEILING SYSTEMS | Air-tight Enigma Syncro XL

AIR-TIGHT ENIGMA SYNCRO XL

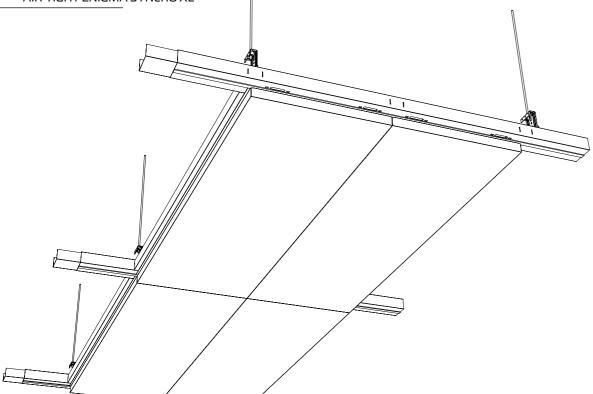

CUSTOM made system

Air-tight

(optional)

Syncro open spring

Syncro bracket

FEATURES

PANELS' FEATURES Syncro spring panels

Right edge 600x1200 mm other dimensions on request

PANELS' MATERIALS Steel 5/10 | 6/10 | 7/10 | 8/10 Stainless steel 5/10 | 6/10 Aluminum 7/10 | 8/10

HIDDEN STRUCTURE

"C" Syncro beams and spacers with air-tight gasket to apply on site

ANTI-SEISMIC EQUIPMENTS Atena Antiseismic Kit for ≤ 1,2 m plenum Atena Antiseismic Kit for > 1,2 m high plenum Compulsory for buildings in 3 and 4 Class (NTC 2018 - § 7.2.3)

HANGERS Hooking bracket with threaded bar

COLORS

Atena white, Atena silver pre-painted aluminum Atena white, Atena silver pre-painted steel RAL/NCS coatings

FINISHING

Plain surface Sublimation of images and effects Antimicrobial treatment (Defence H*)


WALL ANGLES


"Double L" 43x10x15x20 mm with "V" spring and air-tight gasket to apply on site

ACCESSORIES


Custom made integrated lighting by Atena Lux

System components










ATENA LUX INTEGRATED LIGHTING





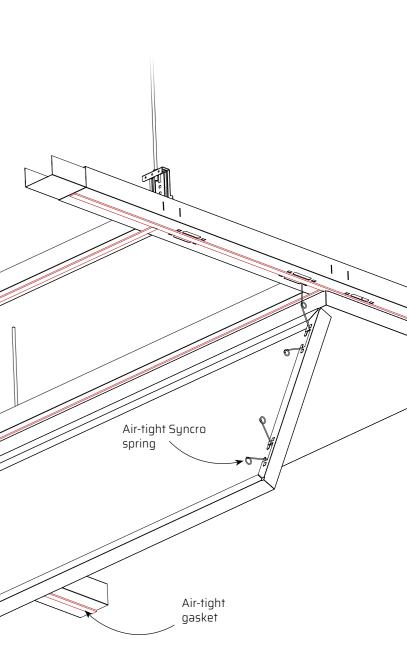

CEILING SYSTEMS

LAY-IN CLIP IN

STANDARD MODELS WITHOUT AIR-TIGHT GASKET SUITABLE FOR LOW RISK ENVIRONMENTS


> Enigma models T-grid models

ATENA H⁺

50



CEILING SYSTEMS | Clip_in / Lay_in

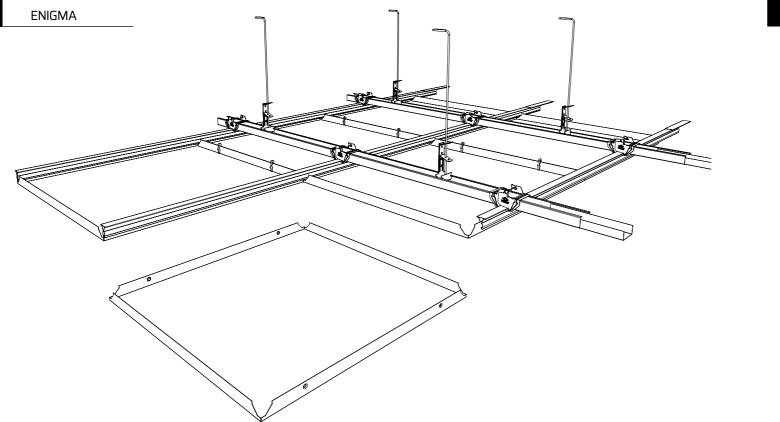

T-GRID MODELS ععوصعو

FEATURES

PANELS' FEATURES

Enigma panels Right or bevelled edge 600x600 | 600X1200 | 625x625 mm 300x300 | 300x1200 | 300x1500 mm 400x1000 | 400x1200 | 400x1500 mm

For Enigma Link system 600x600 | 600X550 550x550 | 500x550 | 500x500 mm

PANELS' MATERIALS Steel 5/10 | 6/10 Aluminum 5/10 | 6/10 | 7/10

HIDDEN STRUCTURE

Single triangular | double with Winger Single continental | double with Winger Double continental with "U" profile

ANTI-SEISMIC EQUIPMENTS

Atena Antiseismic Kit for ≤ 1,2 m plenum Atena Antiseismic Kit for > 1,2 m high plenum Compulsory for buildings in 3 and 4 Class (NTC 2018 - § 7.2.3) (For double structures only)

COLORS | FINISHING

Atena white, Atena silver pre-painted Aluminum | Steel RAL/NCS coatings Plain or perforated surface Sublimation of images and effects Antimicrobial treatment (Defence H*)

SOUND ABSORBERS

Thermoapplied black acoustic fleece Standard A1s2d0 | Plus A1 Black Ecofiber Bs2dO


ACCESSORIES

24

ATE_PLAN/N|ATE_LINK integrated lighting by Atena Lux

Panels | Edges


Enigma with bevelled edge







"C" 18x33x25 mm Optional "omega" spring





FEATURES

PANELS' FEATURES

T-grid lay-in | lay-on panels 24 Linear Tegular | Flat | Plan 600x600 mm 15 Linear Design 600x600 mm all models 600x1200 mm (only right edge, 9mm low.)

PANELS' MATERIALS Steel 5-6/10 | Aluminum 5-6-7/10

STRUCTURE

Steel Strong T15 | T24 | T35 | T43 | Steel Strong Easy Line

ANTI-SEISMIC EQUIPMENTS Atena Antiseismic Kit for ≤ 1,2 m plenum

Atena Antiseismic Kit for > 1,2 m high plenum Compulsory for buildings in 3 and 4 Class (NTC 2018 - § 7.2.3)

COLORS | FINISHING

Atena white, Atena silver pre-painted Aluminum | Steel RAL/NCS coatings Plain or perforated surface Sublimation of images and effects Antimicrobial treatment (Defence H*)


SOUND ABSORBERS


Thermoapplied black acoustic fleece Standard A1s2d0 | Plus A1 Black Ecofiber Bs2dO

Wall angle

"C" 18x42x25 mm

Optional "omega" spring



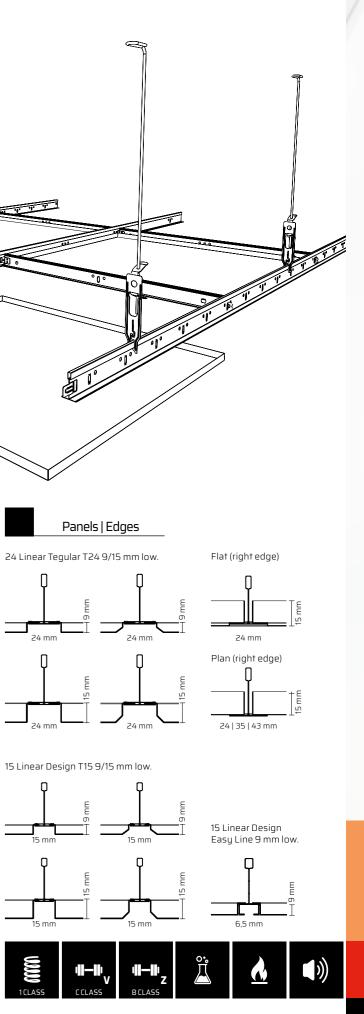

PERFORMANCES

4

DIMENSIONING, TECHNICAL FEASIBILITY

Clean room systems Air-tight systems Antimicrobial features Integrated lightings Antiseismic kits Product selector

Picture: "Ar-tight Enigma Syncro XL" metal ceiling | custom made lighting by Atena Lux

26

ATENA H^+



CLEAN ROOM SYSTEMS

"White Rooms" are controlled atmosphere environments in terms of pressure, humidity and particulate pollution, classified on the basis of 0.5µm **microparticles count** in a defined volume of air. Smaller is the particles quantity detected, cleaner is the room and lower is the class (ISO-5 ISO-6 etc.).

The suitability for clean rooms of the Atena **Syncro Evo** systems was tested by the Fraunhofer Institute IPA in Stuttgart according to the UNI EN ISO 14644-1 standard. In a range from 9 to 1 where 1 is the "cleanest" level, the Atena Syncro Evo systems have been certified in ISO2 class.

SYNCRO EVO

Certified systems for clean rooms

Fraunhofer
TESTED [®] DEVICE ATENA S.P.A ATENA HOSPITAL PANEL Report No. AT 1907-1124



NORMATIVE REQUIREMENTS





Picture: "24 Syncro Evo" metal ceiling | "Ate_Taurus_Evo" lighting by Atena Lux

The clean room functioning is based on the forced recirculation of a laminar flow filtered air, in an air-tight room. In these rooms the air cleanliness, is absolutely superior than in an operating theater.

The UNI 11425: 2011 standard defines that the operating room At-Rest conditions (no surgical activity), must be at least in ISO 5 class for complex surgical interventions (...), ISO 7 for low invasiveness surgical interventions (...), ISO 8 for short-term surgery.

Concentration limits per m³ of particles, source: ISO 14644-1.

Class	0.1µ	0.2µ	0.3µ	0.5µ	1µ	5μ
ISO 1	10	2	-	-	-	-
ISO 2	100	24	10	4	-	-
ISO 3	1000	237	102	35	8	-
ISO 4	10000	2370	1020	352	83	-
ISO 5	100000	23700	10200	3520	832	29
ISO 6	1000000	237000	102000	35200	8320	293
ISO 7	-	-	-	352000	83200	2930
150 8	-	-	-	3520000	832000	29300
150 9	-	-	-	35200000	8320000	293000

In a ISO 2 class chamber, in a m³ of air at most 100 particles with a diameter greater than 0.1 micron, 24 with a diameter greater than 0.2 micron, 10 with a diameter greater than 0.3 micron, 4 with a diameter greater than 0.5 microns must be contained. From 3rd to 9th class the parameters set increase by 10 times.

The clean rooms are used in industrial and scientific research, in microelectronics fields, in food, pharmaceutical and bottling industries.

The certification is carried out by the manufacturer after the chamber activation, using a particle counter.

CLEAN ROOM SUSTAINABILITY

UNI EN ISO 14644-1

Particle concentration limit values per m³ of air are calculated according to this formula:

$$Cn = 10^{N} \times \left[\frac{0.1}{D}\right]^{2.0}$$

Where.

- Cn represents the maximun particle per m³
- N is the classification number ISO; N≤9
- D is the particle dimension and 0.1 is the
- costant value, both expressed in µm.

AIR-TIGHT SYSTEMS

The metal ceilings **air-tight performance** is an important factor to prevent the exchange of gaseous agents between the plenum and the environment, in order to ensure the **contamination control** and the maintenance of the thermo-hygrometric conditions required.

AIR TIGHT MATROX ceiling was tested by the t2i Laboratory - trasferimento tecnologico e innovazione s.c. a r.l. according to ASME MCF-14M | UNI EN ISO 5167-1 using a computerized semiautomatic control and a measurement system which determines both the air flow rate using differential pressure devices and the pressure level inside the test chamber.

All Atena H⁺

air-tight systems range

24 | 35 Syncro Evo **Air-tight Matrox and Enigma Syncro XL**

conceived to achieve the air-tight.

Air-tight MATROX

Air-tight certified system



TRASFERIMENTO TECNOLOGICO INNOVAZIONE SISTEMA CAMERALE VENETO



fluid flow measurement

using small diameter

ဂျင

In the tests carried out, the system was subjected to positive and negative ASME MFC-14M pressure equal to 50 | 100 | 150 | 200 Pa. In the test conditions the air-tight Matrox system obtained the following results.

						precision orifice meters.
Positive pressure	total losses	Losses on total surface	Negative pressure	total losses	Losses on total surface	
Pa	m³/ h	m³/ hm²	Pa	m³/ h	m ³ / hm ²	
50	10,2	4,66	-50	9,6	4,38	
100	15,8	7,21	-100	15,4	7,03	UNI EN ISO 5167-1 flow rate measurement
150	20,4	9,31	-150	19,2	8,77	using differential pressure devices inserted in ducts
200	24,5	11,19	-200	22,7	10,36	with a full circular section.

As a technical standard for the air-tight measurent has not been defined, the t2i Laboratory - trasferimento tecnologico e innovazione s.c. a r.l. has adopted the procedures set in ASME MCF-14M | UNI EN ISO 5167-1.

ANTIMICROBIAL FEATURES

DEFENCE H⁺

ISO 22916 | Special antimicrobial range to achieve the highest hygiene standard

* Information about the tested bacterial spectrum is available on request.



DEFENCE H* RANGE





CHEMICAL RESISTANCE

DEFENCE 4H⁺

ISO 4628-1 | ISO 2812-1 chemical resistance suitability of disinfection**



** The tests were conducted with reagent concentration levels and exposure time (1/3/6/24 hours) higher than the common cleaning processes with diluted disinfectants in different application fields

DEFENCE H⁺ is the Atena range of product materials in steel and aluminium with specific antimicrobial **features** to prevent the pathogens proliferation. Tested for different pathogens spectrum according to ISO 22196 standards | JIS Z 2801-2010 by independent laboratories, **DEFENCE H**⁺ materials achieved a reduction in microbial activity > 99% after 24 hours of exposure*.

"Defence 1H*" Pre-painted galvanised steel with antimicrobial treatment products "Defence 2H*" Pre-painted aluminum with antimicrobial treatment products "Defence 3H*" Post-painted aluminum with antimicrobial treatment products "Defence 4H*" Post-painted galvanised steel with antimicrobial treatment products



Check the performance required to choose the right product

- Air clealiness class
- Antimicrobial features
- Suitability of disinfection
- High pressure water resistance

The chemical resistance of the **Defence H4*** antimicrobial post-painted galvanized steel has been tested by the Fraunhofer Institute IPA of Stuttgart according to the VDI 2083 PART 17 standards; ISO 4628-1; ISO2812-1.

Chemical resistance			
formalin (37%)	А	hydrochloric acid (5%)	А
hydrogen peroxide (30%)	А	isopropanol (100%)	А
sulfuric acid (5%)	А	sodium hydroxide (5%)	В
phosphoric acid (30%)	А	sodium hypochlorite (5%)	А

A = EXCELLENT | B = VERY GOOD

INTEGRATED LIGHTINGS

Properly conceived to meet the requirement of each specific environment, the Atena Lux lighting devices, are developed to achieve a perfect technical and aesthetic integration between lighting and metal ceiling.

High lighting standard:

- Last generation long-lasting LED sources
- High Colour Render Index (CRI> 90)
- "RGB" and "TUNABLE WHITE" technology
- balanced light emission
- Opal and microprismatic optics
- Protection degree IP65 •

Picture on page 32: "24 Syncro Evo" metal ceiling "Ate_Taurus_Evo" lighting by Atena Lux

"Ate Link" and "Ate Taurus/N"

Picture on page 33: "Enigma" metal ceiling

lighting by Atena Lux



CERTIFICATED LIGHTING ISO 2 certified

Properly conceived to achieve the performance levels required TAURUS EVO IP 65 lighting fittings for clean rooms and operating theaters are made up of **ISO2** certified air-tight frames using the antimicrobial material "DEFENCE 4H*".

- **Power** 50 W | **Efficiency** 114 lm/W | **Luminous flux** 5700 lm | **CRI** ≥90
- Colour temperature 4000 K (5000 K and 6500 K on request)
- High transmittance and uniformity opal methacrylate diffuser
- Microprismatic diffuser (UGR <19)
- Protection level IP65 | Electrical safety classification Class I
- **Duration** > 50.000 hours L80/F10 to Ta =25°C
- Integrated power supply unit | Emergency lighting on request.





TO REPRODUCE THE SUN LIGHT

Programmed lighting systems able to mimic the natural light according the circadian biorhythms

All Atena Lux lighting fittings are developed according to Human Centric Lighting criteria, therefore temperature, colour and intensity are programmed to satisfy the human biological **cycle system** in order to improve the general comfort and the performance levels, in relation to the environment features and its uses.





ANTISEISMIC KITS FOR METAL CEILINGS

guaranteeing the **safeguarding of life**.

According to NTC 2018 standards, in all buildings with public and strategic functions the metal ceilings must be conceived and realized to withstand earthquake by

All Atena metal-ceilings can be reinforced with Atena Antiseismic Kit, properly conceived to **dissipate the seismic energy** preventing the system fall.

Atena offers a **specialized technical consulting** and releases a specific **antiseismic** report, where numbers and types of reinforced elements are indicated, according to the false ceiling features and the seismic area of the site.



1







To release the antiseismic report for the installation of an antiseismic suspended ceiling Atena S.p.A. requires the following information:

- Location and intended use of building;
- Type of construction of the building and floors (masonry, ca ...) where false ceilings will be installed;
- Updated plans and sections 1:100 (paper or CAD) of the areas;
- Geological report, if available;
- Special prescription if required.

THE EXPERIMENTAL CAMPAIGN

The effectiveness of Atena antiseismic systems has been tested by the **Department** of Civil, Construction and Environment Engineering (DICEA) of the University of Padua, which carried out the first international campaign of almost static and monotonous cyclic tests to verify the global seismic behaviour of Atena Antiseismic false-ceilings.

PERFORMANCES

PRODUCT SELECTOR

The Atena H⁺ metal ceilings are conceived to meet the requirements of different application fields: from controlled atmosphere environments such as clean rooms and operating theaters, to areas with low risk of contamination such as waiting areas and halls.

A complete range of air-tightness, resistance to chemical corrosion and air cleanliness certified solutions.

Made in antimicrobial steel and aluminium Defence H⁺, the Atena H⁺ metal ceilings prevent the pathogens proliferation and contribute to the maintenance of the required environmental performances.

A complete range of high performance products for the highest environmental quality.



	MODEL	STRUCTURE	AIR-TIGHT		WALL ANGLE		LIGHTING	AIR CLEANLINES CLASS	AIR-TIGHT 55 TEST	ANTIMICROB FEATURES	IAL	DISINFECTION SUITABILITY	HIGH PRESSURE WATER RESISTANCE	ANTISEISMIC KIT	APPLICATION FIELD	
	24 SYNCRO EVO	EASY T24 EASY T24 ANTISEISMIC	Neoprene ga panels' sides Neoprene in	S.	Syncro Evo wall a with air-tight gas non acetic silicon	iket and	ATE_TAURUS EVO IP65	ISO 2 ^(B)	-	Steel Alur DEFENCE		Steel DEFENCE H4 * ^{(D)-(E)}	SI ^(F)	Applicable	Clean rooms Operating theaters from ISO 2 to ISO 9	
	35 SYNCRO EVO	BASE 35 PUNCHED	Neoprene ga panels' sides Neoprene in	S.	Syncro Evo wall a with air-tight gas non acetic silicon	ket and	ATE_TAURUS EVO IP65	ISO 2 ^(B)	-	Steel Alur DEFENCE		Steel DEFENCE H4 * ^{(D)-(E)}	SI ^(F)	Applicable	Clean rooms Operating theaters from ISO 2 to ISO 9	
	Air-tight MATROX	MATROX	Neoprene ga panels' sides		"C" wall angle wit gasket and pushi spring		ATE_TAURUS/N IP65	-	+ - Pa ^(C) 50 100 150 200	Steel Alur DEFENCE		Steel DEFENCE H4 * ^{(D)-(E)}	-	Applicable	Clinics Hospital rooms	
	Air-tight ENIGMA SYNCRO XL	SYNCRO CROSSING	Neoprene ga beams.	asket on	Double "L" wall ar air-tight gasket a panel spring			-	-	Steel Alur DEFENCE		Steel DEFENCE H4 * ^{(D)-(E)}	SI ^(F)	Applicable	Clinics Hospital rooms Common areas	
	ENIGMA	TS TDW CS CSW CSU ^(A)	None		18x33x25 mm "C wall angle with p panel spring		ATE_LINK ATE_PLAN/N ATE_TAURUS/N	-	-	Steel Alur DEFENCE		Steel DEFENCE H4 * ^{(D)-(E)}	-	Applicable	Common areas	
	LAY-IN T24 T15	EASY T24 T15 EASY T24 ANTISEISMIC	None		18x42x25 mm "C wall angle with p panel spring		ATE_SKIN T24 ATE_PLAN T2415 ATE_SPHERE T2415 ATE_BUBBLE T2415	-	-	Steel Alur DEFENCE		Steel DEFENCE H4 * ^{(D)-(E)}	-	Applicable	Common areas	
MODELS	CS= single contin CDW= double con	ular structure angular structure with W	inger F d Vinger	Note (B) Air cleanlir Certificate n° AT 19(Fraunhofer Institute di Stuttgart UNIEN	07 - 1124 Certifi e IPA t2i - tr NISO 14644-1 innova	(C) Air-tight icate n° 119/13 rasferimento tecr azione s.c. a r.l. MCF-14M UNI EN ISC	-		Note (E) Disinfection suitability Certificate n° AT 1907 Fraunhofer Institute di Stuttgart VDI 2083 17; ISO 4628-1; ISO2812-	" 7 - 1124 " IPA " 8 PART " 1. r	Defence 2H*" Defence 3H*" Defence 4H*"	pre-painted galvanised steel with pre-painted aluminum with antin post-painted aluminum with anti post-painted galvanised steel wi put the tested bacterial spectrum	nicrobial treatment produ imicrobial treatment prod ith antimicrobial treatmer	t products. ucts. lucts.	Note (F) High pressure water The metal ceiling can be washed with high pressure water if gaps are sealed with high resistance non- acetic silicone.	37

HIGH PERFORMANCE SYSTEMS

CERTIFICATIONAL TECHNICAL CTANDADA

10.00

"UNIT

4

INTERNATIONAL TECHNICAL STANDARDS

Certifications

ATENA-IT.COM

Picture: "Air-tight Enigma Syncro XL" metal ceiling | custom made lighting by Atena Lux



CERTIFICATIONS



PROPERTIES					
UUUU	FLEXION RESISTANCE	Maximum span 1200 mm - 1 Class EN13964			
****	CORROSION RESISTANCE ⁽¹⁾	Galvanised steel products: C2 Class Pre-painted galvanised steel products: C3 Class Post-painted galvanised steel products: C4 Class Pre/post-painted aluminum products: C5 Class			
RH	(RH%) RELATIVE HUMIDITY RESISTANCE	Galvanised steel products: ≤ 90% Pre/post-painted aluminum products: > 90% Stainless steel and aluminum products: > 90%			
<u> </u>	FIRE REACTION UNI EN 13501-1	Structure, suspension and wall angles: A1 Class Pannelli lisci o forati con tessuto acustico Plus: Classe A1 Pannelli forati con tessuto acustico Standard: Classe A2s1d0			
())	ACOUSTICS	Informations in "Acoustic Performance"			
	COLOR Stability	In compliance with technical tolerances standard. Test according the ΔE - CIELab method. ISO 7724-2 (3)			
	LIGHT REFLECTION	Smooth glossy white: up to 85% ISO 7724-2 (3)			
₩−₩ z	DURABILITY OF GALAVANISED ITEMS	B Class EN13964			
₩ V	DURABILITY OF POST PAINTED ITEMS	C Class EN13964			

1): For applications in particularly aggressive environments such as swimming pools, industrial plants with chemical and / or corrosive emissions, check the most suitable material and surface treatments with the Atena technical and commercial offices.

ENVIRONMENTAL CONTROL

Ö ₂	AIR CLEANLINESS CLASS	Syncro Evo - ISO2 Clas ISO 14644-1
ရို	AIR-TIGHT	Air-tight Matrox with reference to ASME
÷.	CLEANING ⁽²⁾	Wet cloth with warm w High pressure water: Si
\$⁄	DISINFECTION SUITABILITY ⁽³⁾	" Defence 4H ⁺ " post-pa VDI2083 P.17; ISO 4628
	ANTIMICROBIAL FEATURES ⁽⁴⁾ ISO 22196 JIS Z 2801-2010	"Defence 1H*" pre-paint "Defence 2H*" pre-paint "Defence 3H* 4H*" pos
Øø	RESISTANCE TO MOLD ⁽⁵⁾	" Defence H *" post-pain

(2): For environments with low risk of contamination. Clean the metal ceiling with a dry method before using water; the metal ceiling can be washed with high pressure water if all gaps are sealed with high resistance silicone.

(3): Frequent cleaning with diluted disinfectants containing active agents such as formalin, hydrogen peroxide, sulfuric acid, phosphoric acid, hydrochloric acid, isopropanol, sodium hydroxide and sodium hypochlorite. (4): Information about the tested bacterial spectrum available on request.

(5): Pre and post-painted steel and aluminum products are naturally resistant to mold due to the chemical and physical material features. The products maintain the declared performance features if properly cleaned and maintained.

SUSTAINABILITY					
°.	RELEASE OF DANGEROUS SUBSTANCES*	None CAM 2.4.1.3 EN13964			
Ŵ	DISASSEMBLY*	Steel Aluminum 100% recyclable CAM 2.4.1.1			
***	RECYCLED PRODUCT CONTENT*	CAM 2.4.1.8 compliance			

* Data declaration as regiored by the ISO 14021 standard

All Atena metal ceilings are produced for indoor applications, comply with the NTC 2018 technical standards for constructions and the UNI EN 13964 applicable standards, are CE marked and electronically accompanied by the Declaration of Performance (DoP) as required by the European regulation 305/11 concerning the construction product sales in the market.

For **outdoor application** the metal ceilings must always be sized according to the atmospheric and environmental agents such as, but not limitied to, earthquake, winds, thermal expansion, in relation to the installation site, to the building use and to the technical characteristics of the project.

Regardless of internal / external use, metal ceilings as non-structural elements are subjected to the security test of civil constructions.

ATENA-IT.COM

SS


E MCF-14M | UNI EN ISO 5167-1

vater and neutral non-abrasive detergents. Syncro Evo | Air-tight Enigma Syncro XL

ainted stainless steel products only. 28-1; ISO2812-1 - Fraunhofer institute – Stuggart

ited galvanised steel products: action > 99% nted aluminum products: action >99% ost-painted alu./steel products: action >99%

nted aluminum/steel products





MATERIAL DEMOLITION AND **REMOVAL***

in compliance with CAM 2.5.1.

GREEN BUILDING

Requirements: LEED (BREEAM and ITACA for cross-section aspects) КАЗ Ф

B



BEARING CAPACITY AND FLEXION RESISTANCE

Limit states of bearing and flexion resistance of Atena structures and panels are reported in technical data sheets. Atena panels are classified in 1st Class of flexion resistance. Structures have generally a maximum span of 1200 mm. According to Techincal Norme for Construction - D.M. 14/01/2018, lighting elements and accessories must be fixed directly to the concrete and not load the false ceiling system.

According to the engineering criteria of metal ceilings, panels are tested to support their mass and to maintain flatness and curvature properties. On request Atena S.p.A. can conceive and produce tiles suitable to support additional loads, that must be clearly specified in terms of quantity, position and application modes.

LIGHT REFLECTION

The light reflection level of a metal ceiling favours the energy consumption reduction by diminishing the needs of the artificial light use.

The light reflection level depends on many factors such as the colour, the gloss degree, the metal ceiling inclination and the percentage of perforated surface. Generally a smooth white coplanar ceiling can reach a reflection of 85% calculated according to ISO 7724-2 (3).

COLOUR TOLERANCE

Atena S.p.A. has a **quality control management system** to ensure the compliance with law requirements in force and technical standard tolerances. All color controls included those on products made in different production periods or made and processed using raw materials and powders from different lots, are verified and test by Atena according the **DE** - **CIELab method**.

INDOOR WIND LOAD RESISTANCE FOR NON-AIR-TIGHT SYSTEMS

For the calculation on the tiles mechanical strength Atena S.p.A. considered the vertical dead load.

Any upward thrusts that can overcome the dead weight of the metal ceiling **should be checked at project stage** by identifying critical areas where upward thrusts can occur, such as in entrances, near the doors or windows, on the corners of buildings, in the presence of large or permanent openings such as car parks or access routes.

In all these cases, the ceiling must be dimensioned to withstand any wind aspirations or pressures.

DURABILITY

On request Atena S.p.A. can proceed with special treatments against galvanic and chemical corrosion in the most critical conditions.

OSURE SS	ENVIRONMENT CONDITIONS	PRODUCTS DURABILITY CLASSIFICATION
A	Buildings frequently exposed to relative humidity up to 70% and varying temperatures up to 25°C but with no corrosive pollutants.	Atena galvanised steel products
В	Buildings frequently exposed to relative humidity up to 90% and varying temperatures up to 30°C but with no corrosive pollutants.	Atena galvanised steel products
C	Exposure to an atmosphere with 90% humidity level and risk of condensation.	Atena post-painted steel, Stainless steel and aluminum products
D	Critical conditions.	Atena products with specific treatment on request

The **durability** of a material/component is the **capability to maintain** its performance properties and perform the required functions during a defined period; Since the "moment zero", when the component is installed and put into operation, to the "end of its life cycle".

The performance properties declared in D.o.P. (Declarations of Performance) provided by Atena S.p.A. are guaranteed, if the metal ceiling is installed in the environment conditions for which it has been conceived, the recommended maintenance is executed and it is not affected from inadequate treatments such as tampering, cuts, abrasion, damages which can interrupt the coated layer, please check with Atena's technical department the specific environmental conditions to which the product will be submitted in order to choose the most suitable material.

FIRE REACTION

Atena metal ceilings are made of galvanized and painted materials suitable to the different **durability exposure classes** as set in UNI EN ISO 13964. Specifically, galvanized steel products are classified in exposure B class, painted steel products in C Class, the stainless steel and aluminum elements in D Class

All Atena metal ceilings comply with the Euroclass standard for building materials; systems, with holed or metal membrane with acoustic tissue "PLUS", are incombustible and come into A1 Class.

CHEMICAL CORROSION PROTECTION

According the UNI EN ISO 13964 standard all steel and aluminum components must be protected against corrosion in relation to exposure class. The material corrosion is a natural and irreversible deterioration process of the physical properties due to its slow and continuous consumption. The corrosion resistance is indicated as low, medium or high, near the environment corrosion class, in order to evaluate the performance of the coating in the environment and under operating conditions. It should be understood as an indication of the effectiveness of a protection treatment for a given period of time.

UNI EN ISO 12944-1 durability classes

• Low (L) = from 2 to 5 years

••••

- Medium (M) = from 5 to 10 years
- High (H) = over 15 years

This is not a guarantee of durability, but an indication to schedule the maintenance tasks necessary to keep the material's properties in relation to its life cycle.

The durability tests based on the corrosion classes conducted by the Istituto Giordano S.p.A. on the galvanized steel, post-painted galvanized steel, pre-painted galvanized steel and aluminum Atena components used for the construction of metal ceilings, report excellent corrosion resistance and have been classified in C5-M media. Tests were carried out in compliance with UNI EN ISO 6270-2:2005 and 12944-6:2001 standards in humidistatic chamber with humidity atmospheres for the determination of moisture resistance and the protection of steel structures coating against corrosion. The excellent result has been confirmed by the corrosion resistance tests in salt fog conducted by the Istituto Giordano S.p.A. according to UNI EN ISO 9227:2012. As the laboratory environment can not represent the normal conditions of use, Atena S.p.A., according to its experience, recommends the choice of materials according to the classification given in the schedule on page 43.

PROTECTION AGAINST GALVANIC CORROSION

Electrochemical corrosion is due to the contact of materials with different potentials that produce galvanic currents.

In these cases Atena recommends the use of polymer separators and/or the use of post-painted polyestercoated galvanized materials with at least 60 µm; the paint is a good protection against galvanic corrosion in environment conditions that do not deteriorate the coated layer.

For specific applications, please check with Atena technical department the proper material according to the application field.

	CLASS OF CORROSIVIT	Y	INTERNAL ENVIRONMENTS	OUTDOOR ENVIRONMENTS
	C1 VERY LOW r _{corr} ≤ 0,1*	NOT AGGRESSIVE ENVIRONMENT	Low humidity in heated environment, no pollution.	Dry or cold areas with very rare rain with very limited or absent moisture.
	C2 LOW 0,1 < r _{corr} ≤ 0,7*	LITTLE AGGRESSIVE ENVIRONMENT	Temperatures and variable humidity in an no-heated environment, low pollution and moisture values.	Temperate areas with low pollution; Dry or cold areas with limited moisture; Countryside, small towns in hinterland.
	C3 AVERAGE 0,7< r _{corr} ≤ 2*	AVERAGE AGGRESSIVE ENVIRONMENT	Moderate presence of moisture and pollution due to light productive processes.	Temperate zone with average pollution values (SO2 up to 30 µg /m³ or average chlorine content); Urban areas, seaside areas with low deposition of chlorides.
	C4 HIGH 2 < r _{corr} ≤ 4*	AGGRESSIVE ENVIRONMENT	Frequent moisture and high pollution levels due to industrial processes and sports pools.	Very polluted urban areas, industrial districts, seaside with high deposition of chlorides.
	C5-I VERY HIGH C5 -M MARINE 4 < rear 5 8*	HIGH AGGRESSIVE ENVIRONMENT	Caves.	Very serious pollution (502 up to 250 µg/m³); Areas with heavy industrialization, buildings on the coast.



* ENVIRONMENTAL CLASSIFICATION AND CORROSION RATES r_corr [=] µm/year (zinc thickness loss)

Source: ISO 9223 - Corrosion of metals and their alloys - UNI EN ISO 14713 - Zinc Coatings, guidelines and recommendations





The suitability for clean rooms of the Atena Syncro Evo systems was tested by the Fraunhofer Institute IPA in Stuttgart according to the UNI EN ISO 14644-1 standard. In a range from 9 to 1 where 1 is the "cleanest" level, the Atena Syncro Evo systems have been certified in **ISO2** class.

AIR-TIGHT

All Atena H⁺ air-tight metal ceilings 24 | 35 Syncro Evo | Air-tight Matrox | Air-tight Enigma Syncro XL are coinceived to prevent the exchange of gaseous agents between the plenum and the environment, in order to ensure the necessaries conditions for the contamination control.

Air-tight Matrox ceiling was tested by the t2i Laboratory - trasferimento tecnologico e innovazione s.c. a r.l. according to ASME MCF-14M | UNI EN ISO 5167-1 using a computerized semi-automatic control and a measurement system which determines both the air flow rate using differential pressure devices and the pressure level inside the test chamber.

The chemical resistance of the **DEFENCE H4** * antimicrobial post-painted galvanized steel has been tested by the Fraunhofer Institute IPA of Stuttgart according to the VDI 2083 PART 17 standards; ISO 4628-1; **ISO2812-1**. After 1/3/6/24 hours of exposure, the tested products achieved the "very good" level of chemical resistance against **sodium hydroxide** (5%), and "excellent" level under the action of **formalin** (37%), **hydrogen** peroxide (30%), sulfuric acid (5%), phosphoric acid (30%), hydrochloric acid (5%), isopropanol (100%), sodium hypochlorite (5%). The tests were conducted with reagent concentration levels and exposure time higher than the common cleaning processes with diluted disinfectants in different application fields.

ANTIMICRIBIAL PROPERTIES

Atena **Defence H**⁺ products have been tested according to SO 22196 standards | JIS Z 2801-2010 by independent laboratories for different pathogens. In all tests materials achieved a reduction in microbial activity > 99% after 24 hours of exposure. Information about the tested bacterial spectrum is available on request.

 \bigcirc_{\circ} **RESISTANCE TO MOLD**

Steel and aluminum products are naturally resistant to mold due to the chemical and physical material features. The products maintain the declared performance features if properly cleaned and maintained.



H⁺ STANDARD

AIR CLEANLINESS CLASS

CHEMICAL RESISTANCE | DISINFECTION SUITABILITY

ENVIRONMENTAL STANDARD

Ь.

K

Ĭ

46

GREEN ENERGY

By joining the "100% clean energy Dolomiti Energia" certification program, Atena uses **energy from renewable sources**.

RELEASE OF DANGEROUS SUBSTANCES

Atena products **do not release dangerous substances** including formaldehyde. Paints and sublimations are carried out using VOC-free substances.

😨 DISA

DISASSEMBLY

Atena steel and aluminum products are **100% recyclable** and at the end of their life cycle can be prepared for re-use, recovery, recycling and selective demolition.

MATERIALS DEMOLITION AND REMOVAL

At the end of their life cycle, the Atena products become **non-hazardous waste** that can be prepeared for re-use, recovery or recycling.

RECYCLED MATERIAL CONTENT

Atena products are, as a whole, manufactured using recycling processes materials, the recycled content is calculated for each type of product, in compliance with C.A.M. requirements and declared according to the ISO 14021 standard.

GREEN BUILDING

Get credits for building certification according to the **LEED protocol** and to **BREEAM** and **ITACA** standards for crosscutting aspects, by using Atena products. *Quality, environment, health, safety: together for a sustainable architecture.* Atena's commitment to **Environmental Sustainability** and **Safety** passes through all main company processes to produce safe products, which use contributes to the construction of **high performance buildings**, conceived to achieve the **highest levels of comfort**, **healthiness** and **respect for the environment**.





Atena H* Rev 0 - 09/2019

INNOVATIVE ARCHITECTURAL SOLUTIONS

50 M.

Pictures: istockphoto.com: p. 1-7,14,15,18,19,22,23,26,27,30,31,33,35,36,37,38,39,40,44,45,46,47,50 shutterstock.com: p. 8,9,28,29,32,33,40,48,49 adobestock.com: p. 36,37,39 fotolia.com: p. 42,43 123RF.com: p. 14,33,35

The settings are reinterpreted with photorealistic reconstructions by Atena S.p.A. All rights reserved.

All dimensions are nominal and expressed in millimeters. All weights are expressed net of tare. All technical specification data and information can be changed without advise. More details concernings colours, perforations, perimeter profiles and laying instructions are described in technical data sheets suitable on line: atena-it.com For further information please contact sales department: tel. + 39 042175526 commercial@atena-it.com





ISO 9001



Atena S.p.A. Via A. De Gasperi, 52 - 30020 Gruaro (VE) Italy Ph: +39 0421 75526 - Fax: +39 0421 75692 atena-it.com - info@atena-it.com