



POWER X-CHANGE



POWER TOOLS

2020

Handheld Power Tools |
Stationary Power Tools

BMW i Motorsport
Official Main Partner





POWER X-CHANGE

Einhell – Official Main Partner of BMW i Motorsport	4
Power X-Change Master Battery System	6
Cordless Drills	10
Cordless Impact Drills	14
Cordless Drywall Screwdriver	15
Cordless Impact Drivers / Wrench	16
Cordless Hammer Drill	17
Cordless Rotary Hammers	18
Cordless Paint/Mortar Mixers	20
Cordless Angle Grinders	21
Cordless Planer	24
Cordless Jigsaws	25
Cordless Circular Saws	26
Cordless Mini Circular Saw	27
Cordless All Purpose Saws	28
Cordless Sliding Mitre Saw	29
Cordless Mitre Saw	30
Cordless Table Saw	31
Cordless Multifunctional Saws	32
Cordless Drywall Polisher	33
Cordless Orbital Sanders / Multi Sander	34
Cordless Rotating Sander	35
Cordless Polishing/Sanding Machine	35
Cordless Car Polishing Machine	36
Cordless Radio	36
Cordless Speaker	36
Cordless Lights	37
USB Battery Adapter	38
Cordless Blower	38
Cordless Hot Glue Gun	38
Cordless Hot Air Gun	39
Power X-Change Accessories – Cases // Bag	40
Cordless Push Sweeper	41
Cordless Wet and Dry Vacuum Cleaners	42
Cordless Handheld Vacuum Cleaner	43
6-in-1 Cordless Hybrid Compressor	44
Cordless Compressor	45
Power X-Change Accessories – Batteries // Starter Kits // Chargers	46



HANDHELD POWER TOOLS

Screwing	52
Cordless Screwdrivers 3.6 V	52
Cordless Drills 12 V	53
Cordless Impact Drills 12 V	54
Cordless Impact Driver 12 V	55
Drywall Screwdriver	55
Drilling + Mixing	56
Impact Drills	56
Rotary Hammers 2 kg class	58
Rotary Hammers 5 kg class	60
Demolition Hammers	62
Paint/Mortar Mixers	64
Cutting	65
Angle Grinders 230 mm	65
Angle Grinders 125 mm	66
Angle Grinders 115 mm	67
Milling + Planing	68
Wall Liner	68
Biscuit Jointer	68
Routers	69
Planers	69
Sawing	70
Jigsaws	70
Circukar Saws	71
Plunge Cut Saw	72
Mini Circular Saw	72
All Purpose Saws	73
Electric Multifunctional Tools	74
Cordless Multifunctional Tool	75
Grinding / Sanding	76
Cordless Grinding and Engraving Tool	76
Grinding and Engraving Tool	77
Orbital Sanders	77
Band Sanders	78
Delta Sanders	78
Multi Sanders	79
Rotating Sanders	79
Wall Processing System	80
Drywall Polisher	81
Electric Paint Spray Systems	82
Electric Paint Spray Systems (semi-stationary)	83
Electric Paint Spray Systems (Spray Gun)	83
More Power Tools	84
Hot Glue Gun	84
Cordless Hot Glue Gun	84
Electric Tacker	84
Cordless Tacker	84
Hot Air Guns	85
Laser + Detector Technology	86
360° Cross Laser Level	86
Cross Laser Level	87
Laser Distance Meters	88
Laser Levelling	89
Digital Detector	89



STATIONARY POWER TOOLS

Woodworking	92
Sliding Mitre Saws	92
Mitre Saws	95
Mitre Saws with Upper Table	95
Table Saws with Base Frame	96
Table Saws	98
Stationary Planer	99
Scroll Saw	99
Band Saws	100
Woodworking Lathe	101
Vacuum Extraction System	101
Cleaning Systems	102
Wet/Dry Vacuum Cleaners	102
Ash Vacuum Cleaners	107
Compressed Air Technology	108
Silent Compressors	109
Belt-driven Compressor	109
Oil-lubricated Compressors	110
Oil-free Compressors	111
Air Tools + Accessories	113
Stone and Tile Cutting	116
Stone Cutting Machines	116
Tile Cutting Machines	117

Stationary Drilling	118
Bench Drills	118
Stationary Grinders	120
Bench Grinders	120
Stationary Grinders	121
Metalworking	121
Metal Cutting Saw	121
Hoisting	122
Electric Hoists	122
Chain Hoist	122
Hoist Lever Arm	122
Hand Lever Hoist	123
Hand Rope Winch	123
Workshop Equipment	124
Pallet Truck	124
Tool and Gear Wagons	124
Power Generating	125
Power Generators (Petrol)	125
Accessories	126
Accessories – Handheld Power Tools	126
Accessories – Stationary Power Tools	136

Sales Support	148
----------------------	------------

Service	150
----------------	------------

BMW i Motorsport
Official Main Partner



Einhell Germany AG is
the Official Main Partner
of BMW i Motorsport –
see pages 4 and 5 for
further information.

THE EINHELL GUARANTEE PROMISE.

We develop our products so that you can make everything possible. Our priority here is functionality, safety and quality. That is our promise and this is backed up by our guarantees too.

- **30 Day Money-Back Guarantee**
For 100% satisfaction with your Power X-Change device.
- **Power X-Change Battery Warranty**
Warranty extension for Power X-Change batteries to 2 years.
- **Einhell 2+1 Product Warranty**
Warranty extension for all Einhell products to a total of 3 years.



THIS IS HOW:

Find out more at einhell.de, register in your customer account and apply for the warranty. Further information is available at www.einhell.de/warranties

[>>>](http://einhell.de)

EINHELL AND BMW i MOTOSPORT. ENABLING THE FUTURE NOW.

EINHELL IS MAIN PARTNER OF BMW i MOTOSPORT. INTO THE FUTURE WITH BATTERY POWER.

More and more DIY enthusiasts and hobby gardeners appreciate the wireless freedom that cordless devices make possible. words of electromobility form the cornerstones of Formula E and also define the power of cordless tools from Einhell. Against this background, the cooperation with BMW i Motorsport was a logical and strategic step the Group is using to pave the way for new forms of communication. Since the 2018/2019 season of the ABB FIA Formula E Championship we are proud to announce that we are Main Partner of BMW i Motorsport. With this partnership, we would like to be even better for you and achieve pole position in battery expertise in the DIY sector.



"Performance, endurance and durability: These are criteria that the batteries in Formula E racing cars have to meet and which also apply to our cordless tools. In cooperation with BMW i Motorsport as part of Formula E, we found the perfect platform to present ourselves as an innovative technology leader in the field of battery-operated tools and garden tools."

Andreas Kroiss, CEO of Einhell Germany AG

BMW AND FORMEL E. FORMULA E AS A PLATFORM FOR THE MOBILITY OF THE FUTURE.

Since the 2018/19 season, BMW i Andretti Motorsport has been represented as a works team in the ABB FIA Formula E Championship. With the new BMW i powertrain for the BMW iFE.18 and the further developed BMW iFE.20, BMW is collecting valuable insight during the races, which will be directly incorporated into the series development of future models and engines like e.g. the iNEXT. The Formula E engine in turn is profiting from the experience of the series.

ADVANTAGES OF THE COLLABORATION. EINHELL AND ITS CUSTOMERS BENEFIT FROM WIDE COVERAGE.

- Perfect match of e-mobility and the Einhell Power X-Change rechargeable battery platform: Innovations that make the future possible
- Wide coverage thanks to the continuous growth in popularity of Formula E
- Additional multiplier effect thanks to the communication of BMW and other cooperation partners
- Growth in international awareness: worldwide staging of the races in the heart of world-famous metropolises



BMW i Motorsport
Official Main Partner





CORDLESS FREEDOM THANKS TO INDEPENDENT RECHARGEABLE BATTERY TECHNOLOGY.



Cordless – gives you freedom on your project.

For working freely and without restriction – without the nuisance and danger of dragging a cable behind you, without noise, fume emissions and the strain of maneuvering heavy petrol-powered equipment.



SAVE SMART.

- JUST ONE RECHARGEABLE BATTERY
- FOR ALL
- IN THE WORKSHOP AND GARDEN



You need just a single rechargeable battery to be able to operate every tool you use in the workshop, home and garden. This means that once you have one rechargeable battery at home, in future you just buy tools without a battery. That is smart, saves stacks of money and helps protect the environment.



EASY – FLEXIBLE. 1 BATTERY. 1000 POSSIBILITIES.



Fewer batteries to charge up. Fewer chargers.
Less searching for the right rechargeable battery and the right charger.
Less chaos in your storage area.

That is perfect! The right rechargeable battery is always ready to hand. Tedious searching is a thing of the past. And on top of that, you can be sure of having a tidy basement or storeroom. When you have finished your project, simply take the battery out of the tool and insert it in the charger – and that means in the right one straightforwardly, because you only need the one! The next time it takes just one easy step and you are ready for action and can get started on your project immediately.



THE ENABLERS RECOMMEND:



CORDLESS FREEDOM.



SYSTEMATIC SAVINGS.



EASY – FLEXIBLE.



POWER X-CHANGE



ACTIVE BATTERY MANAGEMENT SYSTEM. INTELLIGENT ELECTRONIC CONTROL SYSTEM.

The computer-assisted Active Battery Management System permanently monitors and controls all the safety-related processes of the electrical components and associated hardware. This results in a whole range of advantages:

- LONGER BATTERY SERVICE LIFE
- MAXIMISED RUNNING TIMES
- OPTIMISED TOOL POWER
- INCREASED SAFETY



TWIN-PACK[®] TECHNOLOGY. **18 V + 18 V = 36 V.**

If a device needs more power than provided by a single 18 V rechargeable battery, we simply add a second battery so we generate 18 V + 18 V = 36 V. We call that Twin-Pack[®] Technology. If the voltage (V) gets doubled, the power (W) gets doubled, too.


Double Twin-Pack Technology in turn makes it possible to work for even longer still without the nuisance of recharging. In this case, four rechargeable batteries are used. When the power of the first two batteries finally runs out, the system automatically switches over to the two additional batteries.



POWER X-CHANGE PLUS. THE PLUS IN POWER.

Rechargeable batteries vary not just in terms of running time and weight. What is also critically important is the power that they provide. Power X-Change PLUS Technology makes more power available from the same number of cells, so that you can work with plenty of power even on challenging applications as well.

If, for example, you want to use your angle grinder for cutting work, the running time (see Ah rating) is generally not critical. Sufficient power, on the other hand, is. A car is a useful comparison. Uphill or when overtaking, more power, in other words more HP respectively kW, is needed.

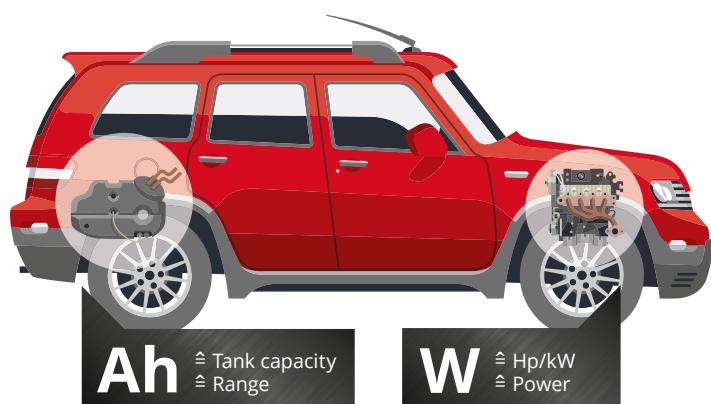

BRUSHLESS ENERGY – MORE EFFICIENT WORK.

Various Power X-Change devices are equipped with brushless motors. They offer significant advantages compared to carbon brush motors

- MORE POWER
- LONGER RUNNING TIMES
- LONGER SERVICE LIFE
- MORE COMPACT DESIGN
- MAINTENANCE-FREE



- 25%**
+ more power*
- 50%**
+ more operating time*
- 100%**
+ more service life*

* Approximate values in comparison to conventional carbon brush motors

THE EN

E Ein



POWER X-CHANGE RANGE

POWER **X-CHANGE**



CORDLESS DRILLS 18 V

QUICK STOP-FUNCTION

enables tools to be changed quickly and easily



Cordless Drill
TE-CD 18 Li Brushless

2-SPEED METAL GEAR BOX

The 2-speed metal gear box delivers plenty of power in the low speed range for screwdriving work and high speeds for fast drilling

ADDITIONAL HANDLE

Comfortable working and less strain on the joints during operation

BRUSHLESS MOTOR

More power and prolonged operation



INTEGRATED LED

Well illuminated work area even in poor lighting conditions

POWER X-CHANGE

LITHIUM-ION BATTERY

The rechargeable battery can be used in all the devices from the Power X-Change family

BELT CLIP

The driver can be kept securely on the belt even in difficult working positions

BRUSHLESS ENERGY - MORE EFFICIENT WORK.



25%
+ more power*

50%
+ more operating time*

100%
+ more servicelife*

- **MORE POWER**
- **LONGER OPERATING TIMES**
- **LONGER SERVICE LIFE**
- **MORE COMPACT DESIGN**
- **MAINTENANCE-FREE**

* Approximate values in comparison to conventional carbon brush motors

CORDLESS DRILLS



	TE-CD 18 Li Brushless - Solo EXPERT PLUS	TE-CD 18 Li Brushless (2x 2.0 Ah) EXPERT PLUS
PXC battery voltage / capacity	18 V / –	18 V / 2.0 Ah
Charging time	–	40 min
Idle speed	0 - 500 / 0 - 1800 min ⁻¹	0 - 500 / 0 - 1800 min ⁻¹
Torque (hard)	60 Nm	60 Nm
Torque settings	19+1	19+1
Drill chuck	13 mm	13 mm
Product weight	1.3 kg (excl. battery)	1.7 kg (incl. battery)
Brushless motor	•	•
Metal drill chuck	•	•
Metal gear box	•	•
Quick stop	•	•
LED	•	•
Belt clip	•	•
Bit box	–	–
Number of batteries / number of chargers	0 / 0	2 / 1x Power X-Charger 3 A
Additional handle	•	•
Packaging	Colour box	E-Box
Article number	45.138.50	45.138.51



CORDLESS DRILLS



	TE-CD 18/50 Li Brushless - Solo EXPERT PLUS	TE-CD 18/50 Li Brushless (2x 2.0 Ah) EXPERT PLUS
PXC battery voltage / capacity	18 V / –	18 V / 2.0 Ah
Charging time	–	40 min
Idle speed	0 - 500 / 0 - 1800 min ⁻¹	0 - 500 / 0 - 1800 min ⁻¹
Torque (hard)	50 Nm	50 Nm
Torque settings	19+1	19+1
Drill chuck	13 mm	13 mm
Product weight	1.2 kg (excl. battery)	1.6 kg (incl. battery)
Brushless motor	•	•
Metal drill chuck	•	•
Metal gear box	•	•
Quick stop	•	•
LED	•	•
Belt clip	•	•
Bit box	–	–
Number of batteries / number of chargers	0 / 0	2 / 1x Power X-Charger 3 A
Additional handle	–	–
Packaging	Colour box	E-Box Basic
Article number	45.138.87	45.138.96



CORDLESS DRILLS



	TE-CD 18 Li E - Solo EXPERT PLUS	TE-CD 18 Li E (2x 2.0 Ah) EXPERT PLUS
PXC battery voltage / capacity	18 V -	18 V / 2.0 Ah
Charging time	-	40 min
Idle speed	0 - 400 / 0 - 1400 min ⁻¹	0 - 400 / 0 - 1400 min ⁻¹
Torque (hard)	47 Nm	47 Nm
Torque settings	8+1	8+1
Drill chuck	13 mm	13 mm
Product weight	1.1 kg (excl. battery)	1.5 kg (incl. battery)
Brushless motor	-	-
Metal drill chuck	-	-
Metal gear box	•	•
Quick stop	•	•
LED	•	•
Belt clip	•	•
Bit box	-	-
Number of batteries / number of chargers	0 / 0	2 / 1x Power X-Charger 3 A
Additional handle	-	-
Packaging	Colour box	E-Box
Article number	45.138.70	45.138.71



CORDLESS DRILLS

40 Nm
HIGH POWER



	TE-CD 18/40 Li - Solo EXPERT	TE-CD 18/40-1 Li (2x 1.5 Ah) EXPERT NEW	TE-CD 18/40 Li (2x 2.0 Ah) EXPERT
PXC battery voltage / capacity	18 V -	18 V / 1.5 Ah	18 V / 2.0 Ah
Charging time	-	30 min	40 min
Idle speed	0 - 400 / 0 - 1500 min ⁻¹	0 - 400 / 0 - 1500 min ⁻¹	0 - 400 / 0 - 1500 min ⁻¹
Torque (hard)	40 Nm	40 Nm	40 Nm
Torque settings	20+1	20+1	20+1
Drill chuck	13 mm	13 mm	13 mm
Product weight	1.1 kg (excl. battery)	1.5 kg (incl. battery)	1.5 kg (incl. battery)
Brushless motor	-	-	-
Metal drill chuck	-	-	-
Metal gear box	•	•	•
Quick stop	•	•	•
LED	•	•	•
Belt clip	•	•	•
Bit box	-	-	-
Number of batteries / number of chargers	0 / 0	2 / 1x Power X-Charger 3 A	2 / 1x Power X-Charger 3 A
Additional handle	-	-	-
Packaging	Colour box	Case	E-Box
Article number	45.139.25	45.139.39	45.139.10



CORDLESS DRILLS



	TE-CD 18/2 Li Kit (2x 1.5 Ah) EXPERT PLUS	TC-CD 18/35 Li - Solo CLASSIC NEW	TC-CD 18/35 Li (1x 1.5 Ah) CLASSIC
PXC battery voltage / capacity	18 V / 1.5 Ah	18 V / -	18 V / 1.5 Ah
Charging time	30 min	-	30 min
Idle speed	0 - 350 / 0 - 1250 min ⁻¹	0 - 550 min ⁻¹	0 - 550 min ⁻¹
Torque (hard)	44 Nm	35 Nm	35 Nm
Torque settings	20+1	20+1	20+1
Drill chuck	10 mm	10 mm	10 mm
Product weight	1.4 kg (incl. battery)	1.0 kg (excl. battery)	1.3 kg (incl. battery)
Brushless motor	-	-	-
Metal drill chuck	-	-	-
Metal gear box	•	•	•
Quick stop	•	•	•
LED	•	•	•
Belt clip	•	-	-
Bit box	-	-	-
Number of batteries / number of chargers	2 / 1x Power X-Charger 3 A	0 / 0	1 / 1x Power X-Charger 3 A
Additional handle	-	-	-
Packaging	Case	Colour box	Colour box
Article number	45.138.30	45.139.27	45.139.14



CORDLESS IMPACT DRILLS



	TE-CD 18 Li-i Brushless - Solo EXPERT PLUS	TE-CD 18 Li-i Brushless (2x 2.0 Ah) EXPERT PLUS
PXC battery voltage / capacity	18 V / -	18 V / 2.0 Ah
Charging time	-	40 min
Idle speed	0 - 500 / 0 - 1800 min ⁻¹	0 - 500 / 0 - 1800 min ⁻¹
Blow rate	0 - 8000 / 0 - 28800 min ⁻¹	0 - 8000 / 0 - 28800 min ⁻¹
Torque (hard)	60 Nm	60 Nm
Torque settings	20+1:1	20+1:1
Drill chuck	13 mm	13 mm
Product weight	1.3 kg (excl. battery)	1.7 kg (incl. battery)
Brushless motor	•	•
Metal drill chuck	•	•
Metal gear box	•	•
Quick stop	•	•
LED	•	•
Number of batteries / number of chargers	0 / 0	2 / 1x Power X-Charger 3 A
Additional handle	•	•
Packaging	Colour box	E-Box
Article number	45.138.60	45.138.61



CORDLESS IMPACT DRILLS



	TE-CD 18/50 Li-i Brushless - Solo EXPERT PLUS	TE-CD 18/50 Li-i Brushless (2x 2.0 Ah) EXPERT PLUS
PXC battery voltage / capacity	18 V / -	18 V / 2.0 Ah
Charging time	-	40 min
Idle speed	0 - 500 / 0 - 1800 min ⁻¹	0 - 500 / 0 - 1800 min ⁻¹
Blow rate	0 - 8000 / 0 - 28800 min ⁻¹	0 - 8000 / 0 - 28800 min ⁻¹
Torque (hard)	50 Nm	50 Nm
Torque settings	20+1:1	20+1:1
Drill chuck	13 mm	13 mm
Product weight	1.2 kg (excl. battery)	1.6 kg (incl. battery)
Brushless motor	•	•
Metal drill chuck	•	•
Metal gear box	•	•
Quick stop	•	•
LED	•	•
Number of batteries / number of chargers	0 / 0	2 / 1x Power X-Charger 3 A
Additional handle	-	-
Packaging	Colour box	E-Box Basic
Article number	45.139.42	45.139.40



CORDLESS IMPACT DRILLS

48 Nm
HIGH POWER



	TE-CD 18/48 Li-i - Solo EXPERT	TE-CD 18/48 Li-i (2x 2.0 Ah) EXPERT NEW
PXC battery voltage / capacity	18 V / –	18 V / 2.0 Ah
Charging time	–	40 min
Idle speed	0 - 400 / 0 - 1500 min ⁻¹	0 - 400 / 0 - 1500 min ⁻¹
Blow rate	0 - 6400 / 0 - 24000 min ⁻¹	0 - 6400 / 0 - 24000 min ⁻¹
Torque (hard)	48 Nm	48 Nm
Torque settings	21+1	21+1
Drill chuck	13 mm	13 mm
Product weight	1.3 kg (excl. battery)	1.7 kg (incl. battery)
Brushless motor	–	–
Metal drill chuck	•	•
Metal gear box	•	•
Quick stop	•	•
LED	•	•
Number of batteries / number of chargers	0 / 0	2 / 1x Power X-Charger 3 A
Additional handle	•	•
Packaging	Colour box	E-Box Basic
Article number	45.139.26	45.139.35



4 006825 635775



4 006825 643930

CORDLESS DRYWALL SCREWDRIVER

**DEPTH
ADJUSTMENT**



	TE-DY 18 Li - Solo EXPERT
PXC battery voltage / capacity	18 V / –
Idle speed	0 - 4000 min ⁻¹
Torque (soft)	6 Nm
Bit mount	Internal hexagon 6.35 mm (1/4")
Product weight	0.9 kg (excl. battery)
Adjustment without tools (depth)	•
Speed control electronics	•
Continuous operation setting	•
Soft grip	•
LED	•
Belt clip	•
Number of batteries / number of chargers	0 / 0
Accessories	1x bit type PH2 S2
Packaging	E-Box
Article number	42.599.80



4 006825 635607

CORDLESS IMPACT DRIVERS

**180 Nm /
140 Nm
HIGH POWER**

BRUSHLESS ENERGY
Einhell



	TE-CI 18 Li Brushless - Solo EXPERT PLUS	TE-CI 18/1 Li - Solo EXPERT PLUS	TE-CI 18/1 Li (1x 2.0 Ah) EXPERT PLUS
PXC battery voltage / capacity	18 V / -	18 V / -	18 V / 2.0 Ah
Charging time	-	-	40 min
Idle speed	0 - 2900 min ⁻¹	0 - 2300 min ⁻¹	0 - 2300 min ⁻¹
Torque (hard)	180 Nm	140 Nm	140 Nm
Bit mount	Internal hexagon 6.35 mm (1/4")	Internal hexagon 6.35 mm (1/4")	Internal hexagon 6.35 mm (1/4")
Product weight	1.1 kg (excl. battery)	1.2 kg (excl. battery)	1.6 kg (incl. battery)
Brushless motor	•	-	-
LED	•	•	•
Metal gear box	•	•	•
Electronic speed control	•	•	•
Belt clip	•	•	•
Number of batteries / number of chargers	0 / 0	0 / 0	1 / 1x Power X-Charger 3 A
Bit adapter	-	-	-
Packaging	Colour box	Colour box	E-Box
Article number	45.100.30	45.100.34	45.100.36



4 006825 613971



4 006825 618907



4 006825 625103

CORDLESS IMPACT WRENCH

**215 Nm
HIGH POWER**

BRUSHLESS ENERGY
Einhell



	TE-CW 18 Li Brushless - Solo EXPERT PLUS
PXC battery voltage / capacity	18 V / -
Charging time	-
Idle speed	0 - 2900 min ⁻¹
Torque (hard)	215 Nm
Bit mount	12.5 mm (1/2") external square drive mount
Product weight	1.1 kg (excl. battery)
Brushless motor	•
LED	•
Metal gear box	•
Electronic speed control	•
Belt clip	•
Number of batteries / number of chargers	0 / 0
Bit adapter	•
Packaging	Colour box
Article number	45.100.40



4 006825 616323

CORDLESS HAMMER DRILL



CORDLESS HAMMER DRILL



	TC-ID 18 Li - Solo	NEW
PXC battery voltage / capacity	18 V / –	
Idle speed	0 - 2600 min ⁻¹	
Blow rate	0 - 41600 min ⁻¹	
Drilling capacity, wood	25 mm	
Drilling capacity, cement	13 mm	
Drilling capacity, steel	10 mm	
Drill chuck	13 mm	
Product weight	1.6 kg (excl. battery)	
Speed control electronics	•	
Soft grip	•	
Number of batteries / number of chargers	0 / 0	
Additional handle	•	
Metal depth stop	•	
Packaging	Colour box	
Article number	45.139.60	



4 006825 647754

CORDLESS ROTARY HAMMERS



CORDLESS ROTARY HAMMER 36 V



PXC battery voltage / capacity	HEROCO 36/28 EXPERT PLUS
Idle speed / blow rate / impact force	36 V - 0 - 1100 min ⁻¹ / 0 - 5300 min ⁻¹ / 3.2 J
Drilling capacity, cement	28 mm
Drill chuck	SDS-plus
Product weight	3.4 kg (excl. battery)
Brushless motor	•
Speed control electronics	•
Vibration-cushioned main handle	•
Overload safety stop	•
Pneumatic impact mechanism	•
Functions	4
LED	•
Automatic lock	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Accessories	Additional handle, metal depth stop
Packaging	E-Box
Article number	45.139.50

HEROCO 36/28 EXPERT PLUS	NEW
36 V -	
0 - 1100 min ⁻¹ / 0 - 5300 min ⁻¹ / 3.2 J	
28 mm	
SDS-plus	
3.4 kg (excl. battery)	
•	
•	
•	
•	
•	
4	
•	
•	
•	
0 / 0	
Additional handle, metal depth stop	
E-Box	
45.139.50	

BRUSHLESS MOTOR

More power and prolonged operation



HEROCO



CORDLESS ROTARY HAMMERS



	HEROCO EXPERT PLUS
PXC battery voltage / capacity	18 V / –
Idle speed / blow rate / impact force	0 - 1200 min ⁻¹ / 0 - 5500 min ⁻¹ / 2.2 J
Drilling capacity, cement	20 mm
Drill chuck	SDS-plus
Product weight	2.12 kg (excl. battery)
Brushless motor	•
Speed control electronics	•
Vibration-cushioned main handle	•
Overload safety stop	•
Pneumatic impact mechanism	•
Functions	4
LED	•
Automatic lock	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Accessories	Additional handle, metal depth stop, 1 magn. bit adapter
Packaging	E-Box
Article number	45.139.00



CORDLESS ROTARY HAMMERS



	TC-HD 18/12 Li - Solo	CLASSIC	NEW
PXC battery voltage / capacity	18 V / –		
Idle speed / blow rate / impact force	0 - 1300 min ⁻¹ / 0 - 6000 min ⁻¹ / 1.2 J		
Drilling capacity, cement	12 mm		
Drill chuck	SDS-plus		
Product weight	1.5 kg (excl. battery)		
Brushless motor	–		
Speed control electronics	•		
Vibration-cushioned main handle	–		
Overload safety stop	•		
Pneumatic impact mechanism	•		
Functions	2		
LED	•		
Automatic lock	•		
Soft grip	•		
Number of batteries / number of chargers	0 / 0		
Accessories	1 magnetic bit adapter		
Packaging	Colour box		
Article number	45.139.70		



CORDLESS PAINT/MORTAR MIXER



PXC battery voltage / capacity	TE-MX 18 Li - Solo EXPERT
Idle speed	18 V / -
Stirrer mount	0 - 580 min ⁻¹
Product weight	M14
Speed control electronics	1.9 kg (excl. stirrer)
Soft start	•
Soft grip	•
Number of batteries / number of chargers	•
Accessories	0 / 0
Packaging	1 mortar stirrer (Ø 100 mm)
Article number	Colour box 42.587.60



4 006825 638196



CORDLESS ANGLE GRINDERS

SLIMLINE DESIGN AND SOFT GRIP SURFACES

For safe and comfortable operation

OVERLOAD CUT-OUT

Protects the high-quality components and ensures long operation

SOFT START FUNCTION AND RESTART SAFE-GUARD

Provide even more safety for the user

Cordless Angle Grinder
AXXIO

SPINDLE LOCK

Easy and quick disc change

ALUMINIUM GEAR HOUSING

Durable and robust

POWER X-CHANGE

LITHIUM-ION BATTERY

The rechargeable battery can be used in all the devices from the Power X-Change family

ADDITIONAL HANDLE

Can be fitted in 2 different positions – for both left-handed and right-handed users

DISC GUARD WITH QUICK ADJUST FACILITY

Quick adjustment to the working position without any tools

BRUSHLESS MOTOR

More power and prolonged operation



AXXIO

CORDLESS ANGLE GRINDERS



BRUSHLESS ENERGY
Einhell



	TE-AG 18/150 Li BL - Solo EXPERT PLUS	NEW
PXC battery voltage / capacity	18 V / -	
Charging time	-	
Idle speed	8500 min ⁻¹	
Wheel diameter	150 mm	
Max. cutting depth	40 mm	
Product weight	1.5 kg (excl. battery)	
Brushless motor	•	
Soft start	•	
Restart safeguard	•	
Overload cut-out	•	
Disc guard with quick adjust facility	•	
Spindle lock	•	
Soft grip	•	
Additional handle	can be mounted in 2 positions	
Number of batteries / number of chargers	0 / 0	
Accessories	1 cutting wheel, 1 cutting wheel guard, 1 face spanner	
Packaging	Colour box	
Article number	44.311.44	



CORDLESS ANGLE GRINDERS



BRUSHLESS ENERGY
Einhell



	AXXIO EXPERT PLUS	AXXIO 18/115 EXPERT PLUS	NEW
PXC battery voltage / capacity	18 V / -	18 V / -	
Charging time	-	-	
Idle speed	8500 min ⁻¹	8500 min ⁻¹	
Wheel diameter	125 mm	115 mm	
Max. cutting depth	33 mm	28 mm	
Product weight	1.4 kg (excl. battery)	1.2 kg (excl. battery)	
Brushless motor	•	•	
Soft start	•	•	
Restart safeguard	•	•	
Overload cut-out	•	•	
Disc guard with quick adjust facility	•	•	
Spindle lock	•	•	
Soft grip	•	•	
Additional handle	can be mounted in 2 positions	can be mounted in 2 positions	
Number of batteries / number of chargers	0 / 0	0 / 0	
Accessories	Face spanner	Face spanner	
Packaging	Colour box	Colour box	
Article number	44.311.40	44.311.50	



CORDLESS ANGLE GRINDERS



	TE-AG 18/115 Li - Solo <i>EXPERT PLUS</i>	TE-AG 18/115 Li Kit (1x 3.0 Ah) <i>EXPERT PLUS</i>
PXC battery voltage / capacity	18 V / –	18 V / 3.0 Ah
Charging time	–	60 min
Idle speed	8500 min ⁻¹	8500 min ⁻¹
Wheel diameter	115 mm	115 mm
Max. cutting depth	28 mm	28 mm
Product weight	1.2 kg (excl. battery)	1.8 kg (incl. battery)
Brushless motor	–	–
Soft start	•	•
Restart safeguard	•	•
Overload cut-out	•	•
Disc guard with quick adjust facility	•	•
Spindle lock	•	•
Soft grip	•	•
Additional handle	can be mounted in 3 positions	can be mounted in 3 positions
Number of batteries / number of chargers	0 / 0	1 / 1x Power X-Charger 3 A
Accessories	Face spanner	Face spanner
Packaging	Colour box	E-Box
Article number	44.311.10	44.311.19



CORDLESS ANGLE GRINDERS



	TE-AG 18/115 Li Kit <i>EXPERT</i>	TC-AG 18/115 Li - Solo <i>CLASSIC</i>
PXC battery voltage / capacity	18 V / –	18 V / –
Charging time	–	–
Idle speed	8500 min ⁻¹	8500 min ⁻¹
Wheel diameter	115 mm	115 mm
Max. cutting depth	28 mm	28 mm
Product weight	1.2 kg (excl. battery)	1.2 kg (excl. battery)
Brushless motor	–	–
Soft start	•	•
Restart safeguard	•	•
Overload cut-out	•	•
Disc guard with quick adjust facility	•	–
Spindle lock	•	•
Soft grip	•	•
Additional handle	can be mounted in 3 positions	can be mounted in 3 positions
Number of batteries / number of chargers	0 / 0	0 / 0
Accessories	Face spanner, 1 cutting wheel, 1 grinding wheel, 1 cutting wheel guard	Face spanner
Packaging	E-Box Basic	Colour box
Article number	44.311.23	44.311.30



CORDLESS PLANER

POWER X-CHANGE

LITHIUM-ION BATTERY

The rechargeable battery can be used in all the devices from the Power X-Change family

CHIP DEPTH UP TO

2 MM

For a wide range of applications



CORDLESS PLANER



TE-PL 18/82 Li - Solo	
EXPERT	NEW
PXC battery voltage / capacity	18 V / –
Idle speed	15000 min ⁻¹
Planing width	82 mm
Chip depth	2 mm
Rebate depth	8 mm
Product weight	2.4 kg (excl. battery)
Soft grip	•
Automatic blade protector	•
Aluminium sole plates	•
V grooves	1
Chip ejection	on one side
Number of batteries / number of chargers	0 / 0
Parallel stop	•
Rebate depth stop	•
Planing blades (reversible blades)	1 pair TCT
Packaging	Colour box
Article number	43.454.00



4 006825 645934

CORDLESS JIGSAWS



	TE-JS 18 Li - Solo EXPERT PLUS	TC-JS 18 Li - Solo CLASSIC NEW
PXC battery voltage / capacity	18 V / –	18 V / –
Stroke speed	0 - 2400 min ⁻¹	0 - 2700 min ⁻¹
Cutting depth (wood/plastic/steel)	80 / 12 / 10 mm	70 / 10 / 8 mm
Product weight	1.8 kg (excl. battery)	1.8 kg (excl. battery)
Universal blade holder	•	–
Pendulum action	4 settings	4 settings
Cutting angle adjustment without tools	•	–
Blade change without tools	•	•
Vacuum cleaner connection	•	•
LED	•	–
Dust-blower function	•	•
Cutting line guide	•	–
Number of batteries / number of chargers	0 / 0	0 / 0
Accessories	Parallel stop, chip guard	1x high quality KWB saw blade
Packaging	Colour box	Colour box
Article number	43.212.00	43.212.09



CORDLESS CIRCULAR SAWS

DUST EXTRACTION

Clean work area thanks to dust extraction system (suitable for all standard dust extractors)

Cordless Circular Saw
TE-CS 18/190 Li BL

SPINDLE LOCK

Easy and quick saw blade change



POWER X-CHANGE

LITHIUM-ION BATTERY

The rechargeable battery can be used in all the devices from the Power X-Change family

SOFT GRIP

Ensures a low-fatigue and safe operation

LED

Optimum illumination of the cutting area

QUICK RELEASE

Simple toolless adjustment of cut depth and tilt angle

ALUMINIUM SOLE PLATE

No tools needed for adjustment – for mitre cuts up to 45°

BRUSHLESS MOTOR

More power and prolonged operation



CORDLESS CIRCULAR SAWS



	TE-CS 18/190 Li BL - Solo EXPERT PLUS	TE-CS 18/165-1 Li - Solo EXPERT
PXC battery voltage / capacity	18 V / –	18 V / –
Idle speed	3800 min ⁻¹	4200 min ⁻¹
Saw blade	Ø 190 x Ø 20/30 mm	Ø 165 x Ø 20 mm
Cutting depth 45° / 90°	65 mm / 45 mm	54 mm / 35 mm
Product weight	3.0 kg (excl. battery)	2.4 kg (excl. battery)
Brushless motor	•	–
Adjustment without tools (depth/angle)	•	•
LED	•	•
Aluminium sawing table	•	•
Spindle lock	•	•
Double-sided safety lock-off	•	•
Dust extraction device	•	•
Soft grip	•	•
Number of batteries / number of chargers	0 / 0	0 / 0
Accessories	Parallel stop	Parallel stop
Packaging	Colour box	Colour box
Article number	43.312.10	43.312.07



4 006825 641547



4 006825 647556

CORDLESS CIRCULAR SAWS



TE-CS 18/150 Li - Solo

EXPERT

NEW

PXC battery voltage / capacity	18 V / –
Idle speed	4200 min ⁻¹
Saw blade	Ø 150 x Ø 10/16 mm
Cutting depth 45° / 90°	48 mm / 32 mm
Product weight	2.3 kg (excl. battery)
Brushless motor	–
Adjustment without tools (depth/angle)	•
LED	•
Aluminium sawing table	•
Spindle lock	•
Double-sided safety lock-off	•
Dust extraction device	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Accessories	Parallel stop
Packaging	Colour box
Article number	43.312.20



CORDLESS MINI CIRCULAR SAW



TE-CS 18/89 Li - Solo

EXPERT

NEW

PXC battery voltage / capacity	18 V / –
Idle speed	3500 min ⁻¹
Saw blade	Ø 89 x Ø 10 mm
Cutting depth 45° / 90°	28 mm / –
Product weight	1.7 kg (excl. battery)
Brushless motor	–
Adjustment without tools (depth/angle)	•
LED	–
Aluminium sawing table	•
Spindle lock	•
Double-sided safety lock-off	–
Dust extraction device	•
Soft grip	•
Number of batteries / number of chargers	0 / 0
Accessories	2 saw blades (wood/plastic), parallel stop
Packaging	Colour box
Article number	43.311.00



CORDLESS ALL PURPOSE SAWS



BRUSHLESS
ENERGY
Einhell



	TE-AP 18/28 Li BL - Solo EXPERT PLUS	TE-AP 18 Li - Solo EXPERT PLUS
PXC battery voltage / capacity	18 V / –	18 V / –
Stroke speed	0 - 2500 min ⁻¹	0 - 2600 min ⁻¹
Stroke height	28 mm	22 mm
Cutting depth (wood / steel)	200 / 12 mm	100 / 6 mm
Saw blade thickness	0.8 - 1.5 mm	0.6 - 1.6 mm
Product weight	2.0 kg (excl. battery)	1.6 kg (excl. battery)
Brushless motor	•	–
Blade change without tools	•	•
Soleplate adjustment without tools	•	•
Anti-vibration function	•	–
Rotatable main handle	•	–
Number of batteries / number of chargers	0 / 0	0 / 0
Accessories	1 saw blade KWB (wood)	1 saw blade (wood)
Packaging	Colour box	Colour box
Article number	43.263.10	43.263.00



CORDLESS SLIDING MITRE SAW

ANGLE CUTS

The saw head can be tilted up to 45° to the left and the turntable can be turned up to 47° to the left/right

Cordless
Sliding Mitre Saw
TE-SM 36/210 Li

'X-TEND' WORK SUPPORTS

The sturdy supports for longer workpieces can be handled with just one hand

SPECIAL SAW BLADE

The saw blade with its special chip grooves, tooth geometry and extra thin saw plate was specially developed for cordless tools and delivers a very fine cut and saves battery power

LASER AND LED LIGHT

Work safely, accurately and fast, even in difficult light conditions

CORDLESS SLIDING MITRE SAW

TWIN-PACK®
18V + 18V > **36V**
TECHNOLOGY



POWER X-CHANGE LITHIUM-ION BATTERY

The rechargeable battery can be used in all the devices from the Power X-Change family

TWIN-PACK®
18V + 18V > **36V**
TECHNOLOGY

TWIN-PACK TECHNOLOGY

Using 2x 18 V Power X-Change rechargeable batteries delivers even more power

TE-SM 36/210 Li - Solo	
	EXPERT
PXC battery voltage / capacity	2x 18 V / –
Speed	3800 min ⁻¹
Saw blade	Ø 210 x Ø 30 mm
Number of teeth	40
Swivelling range	-47° to +47°
Mitre cut	0° to 45° to the left
Max. cutting capacity at 90°	310 x 65 mm
Product weight	12.6 kg (excl. batteries)
Laser	•
LED light	•
Soft start	•
Overload cut-out	•
X-Tend support with limit stop	•
Clamping device	•
Number of batteries / number of chargers	0 / 0
Precision TCT saw blade	1 pc
Sawdust bag	•
Article number	43.008.80



4 006825 641523

CORDLESS MITRE SAW**TE-MS 18/210 Li - Solo****EXPERT**

PXC battery voltage / capacity	18 V / -
Speed	3000 min ⁻¹
Saw blade	Ø 210 x Ø 30 mm
Number of teeth	40
Swivelling range	-47° to +47°
Mitre cut	0° to 45° to the left
Max. cutting capacity at 90°	120 x 60 mm
Product weight	7.8 kg (excl. battery)
Laser	•
LED light	•
Soft start	•
Overload cut-out	•
X-Tend support with limit stop	•
Clamping device	•
Number of batteries / number of chargers	0 / 0
Precision TCT saw blade	1 pc
Sawdust bag	•
Article number	43.008.90



CORDLESS TABLE SAW

FLEXIBLE IN USE

Highly versatile thanks to the angle stop and tilting saw blade. For safety the saw blade is also height-adjustable



PULL-OUT TABLE WIDTH EXTENSION

For wider workpieces the support surface can be extended a further 370 mm to the right

STURDY PARALLEL STOP

The parallel stop can be clamped at the back and front, making it really sturdy. Precise cuts are therefore guaranteed

STURDY ALUMINIUM TABLE

The aluminium table is absolutely torsion-resistant and has perfect sliding properties

SPECIAL SAW BLADE

The saw blade with its special chip grooves, tooth geometry and extra thin saw plate was specially developed for cordless tools and delivers a very fine cut and saves battery power

CORDLESS TABLE SAW



TWIN-PACK®
18V + 18V → **36V**
TECHNOLOGY

TE-TS 36/210 Li - Solo	
PXC battery voltage / capacity	EXPERT
Speed	2x 18 V / –
Saw blade	3800 min ⁻¹
Number of teeth	Ø 210 x Ø 30 mm
Mitre cut	40
Cutting height 90°	0° to 45° to the left
Cutting height 45°	70 mm
Bench size	45 mm
Product weight	467 x 480 mm
Base frame	14.4 kg (excl. batteries)
Table extension	–
Soft start	Right, pull-out
Overload cut-out	•
Number of batteries / number of chargers	•
Precision TCT saw blade	0 / 0
Parallel stop, can be clamped on both sides	1 pc
Angle stop	•
Push stick	•
Article number	43.404.50

TWIN-PACK®
18V + 18V → **36V**
TECHNOLOGY

TWIN-PACK TECHNOLOGY

Using 2x 18 V Power X-Change rechargeable batteries delivers even more power



CORDLESS MULTIFUNCTIONAL TOOLS

ELECTRONIC SPEED CONTROL

Using the right speed ensures that the tool is properly adjusted to each material and application

Cordless Multifunctional Tool
VARRITO

OSCILLATION

11000 - 20000 vibrations per minute with a 3.2 degree angle of oscillation

QUICK RELEASE AND MAGNETIC TOOL FIXATION

Changing accessories comfortably in minimum time and without the need of tools



VARRITO

CORDLESS MULTIFUNCTIONAL TOOLS



	VARRITO EXPERT PLUS	TC-MG 18 Li - Solo CLASSIC
PXC battery voltage / capacity	18 V / –	18 V / –
Oscillating speed	22000 - 40000 min ⁻¹	22000 - 40000 min ⁻¹
Oscillation angle	3.2°	3.2°
Abrasive paper size	93 x 93 x 93 mm	93 x 93 x 93 mm
Product weight	1.0 kg (excl. battery)	0.9 kg (excl. battery)
Speed control electronics	•	•
Soft grip	•	•
Quick-release lock	•	–
Magnetic tool mounting	•	•
Oscillation decoupled battery uptake	•	•
Number of batteries / number of chargers	0 / 0	0 / 0
Delta grinding/sanding disc	•	•
Abrasive paper	3x P60, 3x P80, 3x P120	3x P60, 3x P80, 3x P120
Scrapers	•	•
Plunge-cut blades	1x wood/plastic, 1x metal	1x wood/plastic
Segment saw blade	1x wood/plastic/non-ferrous metal, 1x tile joints (1x each)	1x wood/plastic/non-ferrous metal
Hex key	–	•
Packaging	Colour box	Colour box
Article number	44.651.60	44.651.70



4 006825 618648




4 006825 628593

CORDLESS DRYWALL POLISHER

INTEGRATED DUST EXTRACTION SYSTEM

The integrated dust extraction system enables dust to be removed from the sanding point by means of the impeller in the device and transferred to the supplied dust bag – for keeping the work area really clean without an external dust extraction system

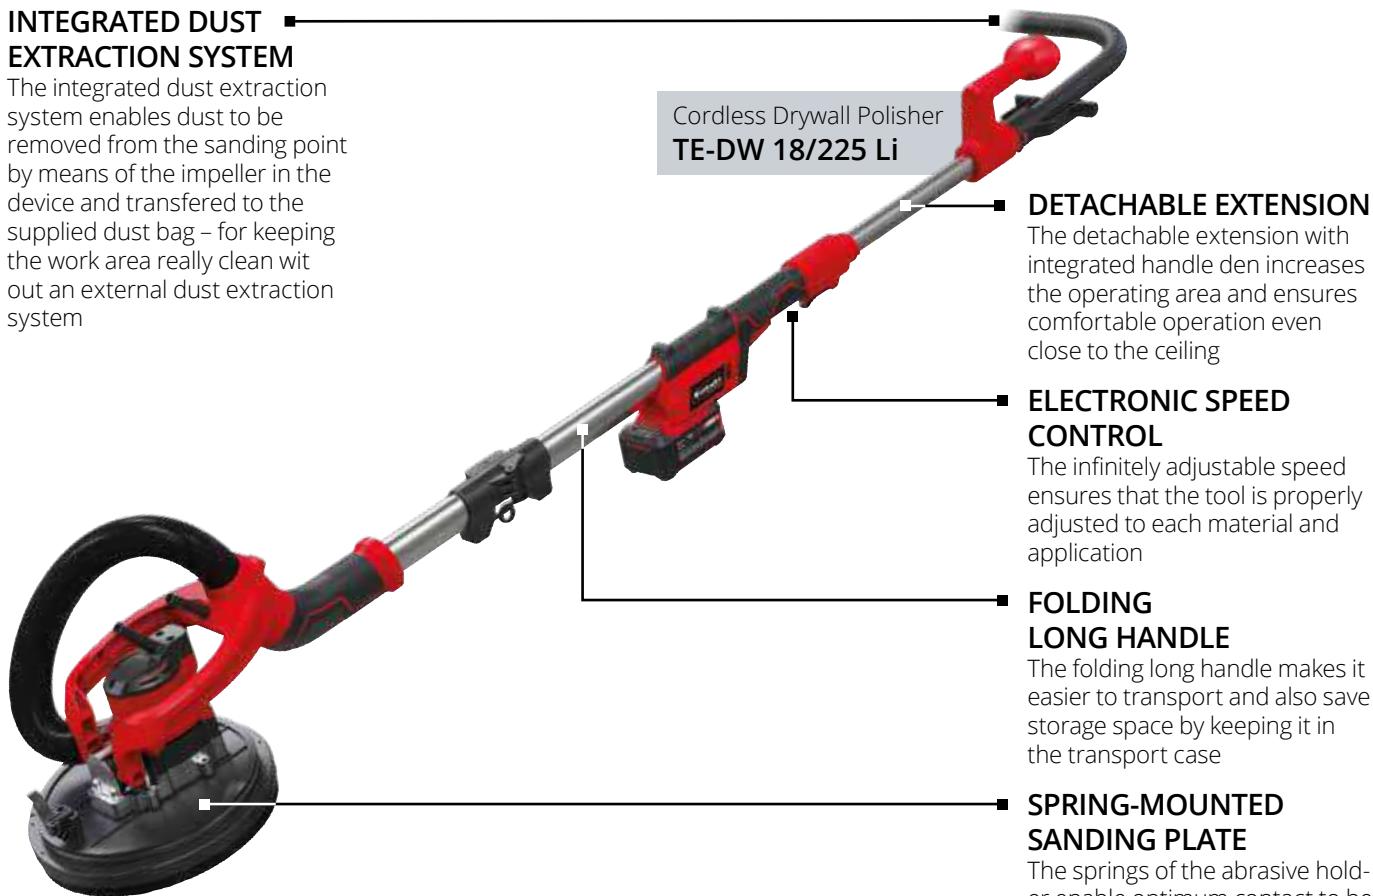

CORDLESS DRYWALL POLISHER



	TE-DW 18/225 Li - Solo	EXPERT PLUS	NEW
PXC battery voltage / capacity	18 V / –		
Idle speed	600 - 1200 min ⁻¹		
Abrasive paper dimensions, Ø	225 mm		
Device length	120 - 165 cm		
Hose length	2.0 m		
Product weight	3.2 kg (excl. battery)		
Speed control electronics	•		
Hook-and-loop fastening system	•		
Clamping mechanism	–		
Dust extraction	Automatically to the dust bag (included in scope of delivery)		
Number of batteries / number of chargers	0 / 0		
Abrasive paper	2x P60, 2x P80, 2x P120 + 1x KWB abrasive mesh		
Dust bag	•		
Packaging	E-Box		
Article number	42.599.90		



4 006825 647037

CORDLESS ORBITAL SANDERS / CORDLESS MULTI SANDER

ELECTRONIC SPEED CONTROL

Using the right speed ensures that the tool is properly adjusted to each material and application

Cordless Orbital Sander
TE-OS 18/230 Li

HOOK AND LOOP FASTENING AND CLAMPING DEVICE

Quick and easy abrasive paper change, outstanding results. Thanks to the additional clamping mechanism, any standard paper can be used without Velcro



SOFT GRIP SURFACES

For safe and comfortable operation

DUST EXTRACTION SYSTEM

Far less dust in the work area thanks to extraction with a dust bag or dust extractor adapter

ALUMINIUM BASE PLATE

The rugged, durable base plate ensures a long service life

POWER X-CHANGE LITHIUM-ION BATTERY

The rechargeable battery can be used in all the devices from the Power X-Change family

CORDLESS ORBITAL SANDERS / CORDLESS MULTI SANDER



	TE-OS 18/230 Li - Solo EXPERT NEW	TC-OS 18/187 Li - Solo CLASSIC NEW	TE-OS 18/150 Li - Solo EXPERT
PXC battery voltage / capacity	18 V / –	18 V / –	18 V / –
Oscillating speed	14000 - 22000 min-1	24000 min-1	24000 min-1
Oscillating circuit, Ø	2.0 mm	2.0 mm	1.6 mm
Abrasive paper size	230 x 115 mm	187 x 97 mm	150 x 150 x 100 mm
Product weight	1.6 kg (excl. battery)	1.1 kg (excl. battery)	0.8 kg (excl. battery)
Speed control electronics	•	–	–
Hook-and-loop fastening system	•	•	•
Clamping mechanism	•	•	–
Dust extraction	by use of dust bag + dust extraction adapter	by use of dust bag + dust extraction adapter	by use of dust coll. box + dust extraction adapter
Number of batteries / number of chargers	0 / 0	0 / 0	0 / 0
Abrasive paper	1x P60, 1x P80, 1x P120	1x P80	3x P120, 3x P240
Dust extraction adapter	•	•	•
Packaging	Colour box	Colour box	Colour box
Article number	44.607.20	44.607.25	44.607.08



4 006825 642728



4 006825 642735



4 006825 651218

CORDLESS ROTATING SANDER



	TE-RS 18 Li - Solo EXPERT PLUS
PXC battery voltage / capacity	18 V / –
Oscillating speed	14000 - 22000 min ⁻¹
Oscillating circuit, Ø	2.0 mm
Abrasive paper, Ø	125 mm
Product weight	1.2 kg (excl. battery)
Speed control electronics	•
Hook-and-loop fastening system	•
Dust extraction	by use of dust bag + dust extraction adapter
Soft grip	•
Number of batteries / number of chargers	0 / 0
Abrasive paper	1x P80
Packaging	Colour box
Article number	44.620.10



CORDLESS POLISHING/SANDING MACHINE



	CE-CP 18/180 Li E - Solo EXPERT PLUS
PXC battery voltage / capacity	18 V / –
Idle speed	500 - 3000 min ⁻¹
Diameter	180 mm
Product weight	1.6 kg (excl. battery)
Brushless motor	•
Suitable für grinding/sanding	•
ON/OFF switch	•
Ergonomic soft grip	•
Speed control electronics	•
Spindle lock	•
Hook-and-loop fastener for polishing and grinding acc.	•
Number of batteries / number of chargers	0 / 0
Synthetic bonnet	1
Foam pad	1
Abrasive paper (grit size 60, 80, 120)	1 of each
Article number	20.933.20



CORDLESS CAR POLISHING MACHINE



	CE-CB 18/254 Li - Solo
PXC battery voltage / capacity	18 V / -
Idle speed	2500 min ⁻¹
Diameter	254 mm
Product weight	1.9 kg (excl. battery)
ON/OFF switch	•
Ergonomic soft grip	•
Number of batteries / number of chargers	0 / 0
Textile bonnet	1
Synthetic bonnet	1
Article number	20.933.01



CORDLESS RADIO



CORDLESS SPEAKER



	TE-CR 18 Li - Solo EXPERT PLUS
PXC battery voltage / capacity	18 V / -
AM Frequency	522 - 1620 kHz
FM Frequency	87.5 - 108 MHz
Station memory (AM/FM)	10 / 10
Product weight	0.7 kg (excl. battery)
LCD display	•
Carry handle	•
Storage room at the back for a mobile phone etc.	•
Number of batteries / number of chargers	0 / 0
Packaging	Colour box
Article number	34.080.15



	TC-SR 18 Li - Solo CLASSIC
PXC battery voltage / capacity	18 V / -
Power rating	2x 3 W
Max. volume	85 dB
Product weight	0.8 kg (excl. battery)
AUX-IN connection	•
Bluetooth	•
USB charging function	•
Number of batteries / number of chargers	0 / 0
Packaging	Carton with window
Article number	45.141.50



CORDLESS LIGHTS



	TE-CL 18/2000 LiAC - Solo EXPERT	TC-CL 18/1800 Li - Solo CLASSIC	NEW
PXC battery voltage / capacity	18 V / –	18 V / –	
Mains connection	100 - 240 V ~ 50-60 Hz	–	
Cable length	2 m	–	
Luminosity	1000 lm / 1500 lm / 2000 lm	0 - 1800 lm	
Light source	20 LED	1 LED	
Light ON time	4 h (4.0 Ah)	4 h (4.0 Ah)	
Product weight	1.3 kg (excl. battery)	1.3 kg (excl. battery)	
Angle adjustment	•	•	
Adjustable light beam	–	–	
Fastening hooks	•	•	
Tripod socket 1/4" / 5/8"	•	–	
Soft grip	•	–	
Number of batteries / number of chargers	0 / 0	0 / 0	
Mains cable	2 m	–	
Packaging	Colour box	Colour box	
Article number	45.141.14	45.141.15	



CORDLESS LIGHTS



	TE-CL 18 Li H - Solo EXPERT PLUS	TE-CL 18 Li - Solo EXPERT PLUS
PXC battery voltage / capacity	18 V / –	18 V / –
Mains connection	–	–
Cable length	–	–
Luminosity	280 lm	270 lm
Light source	1 LED	3 LED
Light ON time	8 h (1.5 Ah)	8 h (1.5 Ah)
Product weight	0.2 kg (excl. battery)	0.2 kg (excl. battery)
Angle adjustment	•	•
Adjustable light beam	–	•
Fastening hooks	•	–
Tripod socket 1/4" / 5/8"	–	–
Soft grip	•	•
Number of batteries / number of chargers	0 / 0	0 / 0
Packaging	Colour box	Colour box
Article number	45.141.30	45.141.10



USB BATTERY ADAPTER



TE-CP 18 Li USB - Solo

EXPERT PLUS

PXC battery voltage / capacity	18 V / -
USB connections	2
Output current USB 1	1.0 A
Output current USB 2	2.1 A
Product weight	0.1 kg (excl. battery)
Number of batteries / number of chargers	0 / 0
Packaging	Colour box
Article number	45.141.20



CORDLESS BLOWER



TE-CB 18/180 Li - Solo

EXPERT

PXC battery voltage / capacity	18 V / -
Blow velocity step 1 step 2	130 km/h 180 km/h
Product weight	1.0 kg (excl. battery)
Electronic speed control	•
Number of batteries / number of chargers	0 / 0
Inflation nozzles	3 pcs
Packaging	Colour box
Article number	34.080.01



CORDLESS HOT GLUE GUN



TE-CG 18 Li - Solo

EXPERT

PXC battery voltage / capacity	18 V / -
Warm-up period	120 s
Max. temperature	170 °C
Glue sticks, Ø	11 mm
Product weight	0.3 kg (excl. battery)
LED heat level indicator	•
LED light	•
Number of batteries / number of chargers	0 / 0
Accessories	5 glue sticks (l = 200 mm), flat glue nozzle
Article number	45.222.00



CORDLESS HOT AIR GUN

OVERHEATING PROTECTION
Safe operation thanks to the overheating protection

MECHANICAL NOZZLE EJECTOR
The nozzle attachments can be removed from the equipment quickly and easily without any hand contact

STATIONARY USE
The equipment can be stood on a flat surface so that both hands are free for working on the workpiece more effectively



SWING-OUT METAL HOOK
The swing-out metal hook enables the cordless hot air gun to be quickly hung from suitable points or secured to them for storage

2 TEMPERATURE SETTINGS
The temperature can be adjusted to the right setting for optimum operation on each different material

ERGONOMIC HANDLE WITH SOFT GRIP
The soft grip makes the hot air gun secure and comfortable to hold

POWER X-CHANGE LITHIUM-ION BATTERY
The rechargeable battery can be used in all the devices from the Power X-Change family

CORDLESS HOT AIR GUN



TE-HA 18 Li - Solo	
PXC battery voltage / capacity	EXPERT 18 V / –
Temperature setting 1 setting 2	350 °C 550 °C
Air rate	200 l/min
Product weight	0.6 kg (excl. battery)
LED display	•
Overheating guard	•
Continuous operation setting	•
Mechanical nozzle ejector	•
Number of batteries / number of chargers	0 / 0
Reducer nozzle	•
Wide nozzle	•
Reflector nozzle	•
Packaging	Colour box
Article number	45.205.00



4 006825 647730

ACCESSORIES – CASES

	E-Box L70	E-Box M55	E-Box S35
Items supplied	1 universal case	1 universal case	1 universal case
Internal dimensions	670 x 110 x 300 mm	510 x 327 x 124 mm	310 x 250 x 89.5 mm
External dimensions	700 x 250 x 350 mm	550 x 400 x 150 mm	350 x 330 x 110 mm
Load capacity	50 kg	30 kg	12 kg
Product weight	4.1 kg	3.0 kg	1.6 kg
Article number	45.300.54	45.300.49	45.300.45

**ACCESSORIES – BAG**

	Einhell Bag 45/22
Items supplied	1 universal bag
Internal dimensions	390 x 200 x 190 mm
External dimensions	450 x 220 x 350 mm
Load capacity	15 kg
Product weight	0.9 kg
Article number	45.300.37



CORDLESS PUSH SWEEPER

CORDLESS OPERATION WITH POWER X-CHANGE LITHIUM-ION BATTERY

Cordless operation means that corners and hard-to-reach areas are easy to sweep as well. The rechargeable battery can be used in all the devices from the Power X-Change family



Cordless Push Sweeper
TE-SW 18/610 Li

CORDLESS PUSH SWEEPER



TE-SW 18/610 Li - Solo	
	EXPERT
PXC battery voltage / capacity	18 V / –
Max. area coverage	1800 m²/h
Sweeping width	610 mm
Dirt tank	20 l
Number of side brushes	2
Product weight	10.6 kg (excl. battery)
Height-adjustable handlebar	•
Folding handlebar	•
Parking position	•
On/Off switch on the handle	•
Removable lip for sweeping in uneven areas	•
Number of batteries / number of chargers	0 / 0
Article number	23.520.40



4 006825 649246

CORDLESS WET AND DRY VACUUM CLEANERS

CORDLESS OPERATION WITH POWER X-CHANGE LITHIUM-ION BATTERY

Cordless operation means that corners and hard-to-reach areas are easy to sweep as well. The rechargeable battery can be used in all the devices from the Power X-Change family

ECO/BOOST MODE

2 speeds (ECO + BOOST) for optimum battery use

ACCESSORY HOLDER

The TE-VC 36/30 Li S is always ready for action thanks to the accessory holder directly on the equipment

TWIN-PACK®

18V + 18V → 36V

TECHNOLOGY

TWIN-PACK TECHNOLOGY

Using 2x 18 V Power X-Change rechargeable batteries delivers even more power



CORDLESS WET AND DRY VACUUM CLEANERS



	TE-VC 36/30 Li S - Solo EXPERT PLUS	TC-VC 18/20 Li S - Solo CLASSIC
PXC battery voltage / capacity	2x 18 V / -	18 V / -
Suction power	150 mbar / 100 mbar (BOOST / ECO)	80 mbar
Tank volume	30 l	20 l
Suction hose length / diameter	250 cm / 36 mm	150 cm / 36 mm
Product weight	8.0 kg (excl. battery)	3.6 kg (excl. battery)
Speed settings	2	1
Also suitable for wet vacuuming	•	•
Heavy-duty suction hose	•	-
Number of batteries / number of chargers	0 / 0	0 / 0
Suction tube	Telescopic, stainless steel	3-piece, plastic
Nozzles	Crevice, upholstery and combination nozzle (1x each)	Crevice, upholstery and combination nozzle (1x each)
Filters	Foam, pleated filter, dirt bag (1x each)	Foam, pleated filter, dirt bag (1x each)
Packaging	Colour box	Colour box
Article number	23.471.40	23.471.30



4 006825 635874



4 006825 625998

CORDLESS WET AND DRY VACUUM CLEANERS



TE-VC 18/10 Li - Solo EXPERT	
PXC battery voltage / capacity	18 V / –
Suction power	90 mbar
Tank volume	10 l
Suction hose length / suction tube length	200 cm
Product weight	3.1 kg (excl. battery)
Speed settings	1
Also suitable for wet vacuuming	•
Number of batteries / number of chargers	0 / 0
Nozzles	2-in-1 crevice/brush nozzle and 2-in-1 upholstery/universal nozzle (1x each)
Filters	Foam filter, filter bag, dirt bag (1x each)
Wall bracket	–
Packaging	Colour box
Article number	23.471.60



CORDLESS HANDHELD VACUUM CLEANER



TE-VC 18 Li - Solo EXPERT PLUS	
PXC battery voltage / capacity	18 V / –
Suction power	42 mbar
Tank volume	0.54 l
Suction hose length / suction tube length	46.5 cm
Product weight	0.9 kg (excl. battery)
Speed settings	1
Also suitable for wet vacuuming	–
Number of batteries / number of chargers	0 / 0
Nozzles	Crevice, upholstery, floor nozzle (1x each)
Filters	1 washable synthesis filter (1x each)
Wall bracket	•
Packaging	Colour box
Article number	23.471.20



6-IN-1 CORDLESS HYBRID COMPRESSOR

MULTIFUNCTIONAL

High-pressure pumping,
low-pressure pumping and
low-pressure suctioning with just
a single device

COMFORTABLE TRANSPORT

Low product weight and
soft grip for easy transp

ACCESSORIES

With the 3-piece inflation
adapter set for balls, tires and
air mattresses, the compressor
is highly versatile

HYBRID FUNCTION

For use with a power cable or
rechargeable battery on the go

MANUAL PRESSURE SETTING ADJUSTMENT

High-pressure pump with
adjustable pressure settings up
to 11 bar, auto shutoff function
when the pressure is reached



PRESSURE INDICATOR

Digital pressure indicator for the
pressure of the high-pressure
pump

6-in-1 Cordless
Hybrid Compressor
PRESSITO

COMFORTABLE

Cable and hoses are kept directly
on the tool itself

POWER X-CHANGE LITHIUM-ION BATTERY

The rechargeable battery can
be used in all the devices from
the Power X-Change family

6-IN-1 CORDLESS HYBRID COMPRESSOR



PRESSITO

	PRESSITO
PXC battery voltage / capacity	EXPERT
Mains connection	18 V / –
Suction power	220 - 240 V ~ 50 Hz
Output rate 0 bar 4 bar 7 bar	21 l/min
Max. operating pressure	16 l/min 10 l/min 8 l/min
Product weight	11 bar
Hybrid function	2.1 kg (excl. battery)
Digital pressure indicator	•
Soft grip	•
Cable storage	•
Number of batteries / number of chargers	•
Hoses incl.	0 / 0
Adapter set	High pressure hose, low pressure hose
Packaging	•
Article number	Colour box 40.204.60



4 006825 627244

CORDLESS COMPRESSOR

TWIN-PACK®
18V + 18V > 36V
TECHNOLOGY



TE-AC 36/6/8 Li OF Set - Solo

EXPERT

PXC battery voltage / capacity	2x 18 V / -
Mains connection	-
Suction power	130 l/min
Output rate 0 bar 4 bar 7 bar	90 l/min 55 l/min 38 l/min
Tank capacity	6 l
Max. operating pressure	8 bar
Product weight	9.7 kg (excl. battery)
Pressure Reducer	•
Number of batteries / number of chargers	0 / 0
Compressed air hose	•
Blow-out pistol	•
Tire pressure gauge	•
Adapter set	•
Packaging	Colour box
Article number	40.204.50



ACCESSORIES – BATTERIES



4-6 Ah Multi-Ah Power X-Change Plus Battery

Items supplied	
PXC battery voltage / capacity	18 V / 6.0 Ah or 4.0 Ah (depending on the application)
Battery power	max. 1350 W
Product weight	1.02 kg
Article number	45.115.02



ACCESSORIES – BATTERIES



5.2 Ah Power X-Change Plus Battery

Items supplied	
PXC battery voltage / capacity	18 V / 5.2 Ah
Battery power	max. 1260 W
Product weight	0.89 kg
Article number	45.114.37



3.0 Ah Power X-Change Plus Battery

Items supplied	
PXC battery voltage / capacity	18 V / 3.0 Ah
Battery power	max. 900 W
Product weight	0.57 kg
Article number	45.115.01



4-6 Ah MULTI-Ah POWER X-CHANGE PLUS BATTERY

Thanks to MULTI-Ah technology, switching over from a 4 Ah battery to a 6 Ah battery is really easy and can be done with just the push of a button. The 4 Ah battery has a 3x longer total service life and is suitable for lighter applications (e.g. cordless lamp or cordless screwdriver). The 6 Ah battery offers the maximum running time for more capacity-intensive applications (e.g. cordless lawn mower or cordless wet and dry vacuum cleaners).

4 Ah 300 %

more lifetime¹⁾

6 Ah 50 %

more runtime²⁾

¹⁾ in comparison to every standard lithium-ion battery

²⁾ in comparison to the 4 Ah battery

ACCESSORIES – BATTERIES



	4.0 Ah Power X-Change Battery	2.0 Ah Power X-Change Battery
Items supplied	1 battery	1 battery
PXC battery voltage / capacity	18 V / 4.0 Ah	18 V / 2.0 Ah
Battery power	max. 900 W	max. 450 W
Product weight	0.65 kg	0.4 kg
Article number	45.113.96	45.113.95



ACCESSORIES – STARTER KITS



	2x 3.0 Ah PXC Twin Charger Starter Kit	2x 3.0 Ah PXC Starter Kit
Items supplied	2 batteries + 1 Power X-Twin Charger 3 A	2 batteries + 1 Power X-Charger 3 A
PXC battery voltage / capacity	2x 18 V / 2x 3.0 Ah	2x 18 V / 2x 3.0 Ah
Battery power	max. 2x 900 W	max. 2x 900 W
Article number	45.120.83	45.120.98



ACCESSORIES – STARTER KITS



	4.0 Ah PXC Starter Kit	3.0 Ah PXC Starter Kit	2.5 Ah PXC Starter Kit
Items supplied	1 battery + 1 Power X-Charger 3 A	1 battery + 1 Power X-Charger 3 A	1 battery + 1 Power X-Charger 3 A
PXC battery voltage / capacity	18 V / 4.0 Ah	18 V / 3.0 Ah	18 V / 2.5 Ah
Battery power	max. 900 W	max. 900 W	max. 720 W
Article number	45.120.42	45.120.41	45.120.97



BATTERY CHARGING TIMES

WHICH BATTERY GETS CHARGED UP BY WHICH CHARGER AND HOW FAST?

	1,5 Ah battery*	2,0 Ah battery	2,5 Ah battery*	3,0 Ah Plus battery	3,0 Ah battery*	4,0 Ah battery	5,2 Ah Plus battery	4-6 Multi-Ah Plus battery
Power X-Charger 3 A								
Power X-Twin Charger 3 A	30 min	40 min	50 min	60 min	60 min	75 min	100 min	75 / 120 min
Power X-Boost Charger 6 A								
Power X-Boost Charger 6 A (Boost Mode)	24 min	30 min	27 min	32 min	32 min	40 min	50 min	40 / 60 min
Power X-Fast Charger 4 A	24 min	30 min	37 min	45 min	45 min	60 min	80 min	60 / 90 min

* Not available separately

ACCESSORIES – CHARGERS

SPRING
2020

	Power X-Boost Charger 6 A	Power X-Twin Charger 3 A	Power X-Fast Charger 4 A
Items supplied	1 charger	1 charger	1 charger
Can be used for	PXC batteries (18 V)	PXC batteries (18 V)	PXC batteries (18 V)
Charging current	3.0 A to 6.0 A	3.0 A per slot (parallel charging)	4.0 A
Multi charger	–	•	–
Boost mode	•	–	–
Integrated wall mount	•	•	•
Article number	45.120.64	45.120.69	45.121.03



4 006825 629019



4 006825 629729



4 006825 650228



HANDHELD POWER TOOLS





CORDLESS SCREWDRIVERS 3.6 V

**3.6 V
POWER**



	TE-SD 3.6/1 Li EXPERT	TE-SD 3.6 Li Kit EXPERT	TC-SD 3.6 Li CLASSIC
Li-Ion Battery Pack voltage / capacity	3.6 V / 1.5 Ah	3.6 V / 1.5 Ah	3.6 V / 1.3 Ah
Charging time	3 - 5 h	3 h	3 - 5 h
Idle speed	180 min ⁻¹	200 min ⁻¹	200 min ⁻¹
Torque (hard)	4.5 Nm	3.5 Nm	3 Nm
Product weight	0.4 kg	0.4 kg	0.4 kg
Bit locking sleeve	-	•	-
Pivot joint	-	•	•
LED	•	•	•
Micro USB charger	•	-	-
Clockwise and counter-clockwise operation	•	•	•
Charge status indicator	-	•	•
Magnetic screw holder	-	•	-
Bits	10 pcs	32-piece bit box	6 pcs
Charging station	-	-	-
Packaging	Metal box	Metal box	Colour box
Article number	45.135.01	45.134.95	45.134.42



4 006825 622744



4 006825 598575



4 006825 604733



CORDLESS DRILLS 12 V

**30 Nm
HIGH POWER**



	TE-CD 12/1 X-Li (1x 2.0 Ah) EXPERT	TE-CD 12/1 Li (1x 2.0 Ah) EXPERT	TE-CD 12/1 Li (2x 2.0 Ah) EXPERT
Li-Ion Battery Pack voltage / capacity	12 V / 2.0 Ah	12 V / 2.0 Ah	12 V / 2.0 Ah
Charging time	45 min	45 min	45 min
Idle speed	0 - 400 / 0 - 1400 min ⁻¹	0 - 400 / 0 - 1400 min ⁻¹	0 - 400 / 0 - 1400 min ⁻¹
Torque (hard)	30 Nm	30 Nm	30 Nm
Torque settings	19+1	19+1	19+1
Drill chuck	10 mm	10 mm	10 mm
Product weight	1.1 kg (incl. battery)	1.1 kg (incl. battery)	1.1 kg (incl. battery)
Metal gear box	•	•	•
Quick stop	•	•	•
LED	•	•	•
Removable drill chuck	•	-	-
Clockwise and counter-clockwise operation	•	•	•
Number of batteries / number of chargers	1 / 1x 45 min charger	1 / 1x 45 min charger	2 / 1x 45 min charger
Bits	-	5 pcs	5 pcs
Packaging	Storage carton with magnetic lock	Storage carton with magnetic lock	Storage carton with magnetic lock
Article number	45.135.92	45.135.90	45.135.94



4 006825 628685



4 006825 626483



4 006825 633399

CORDLESS DRILLS 12 V

DRILL+SCREW



	TC-CD 12 Li CLASSIC	TH-CD 12-2 Li CLASSIC	TH-CD 12 Li CLASSIC
Li-Ion Battery Pack voltage / capacity	12 V / 1.3 Ah	12 V / 1.3 Ah	12 V / 1.3 Ah
Charging time	60 min	3 - 5 h	3 - 5 h
Idle speed	0 - 300 / 0 - 1050 min ⁻¹	0 - 350 / 0 - 1300 min ⁻¹	0 - 400 min ⁻¹
Torque (hard)	20 Nm	24 Nm	22 Nm
Torque settings	17+1	19+1	19+1
Drill chuck	10 mm	10 mm	10 mm
Product weight	1.1 kg (incl. battery)	1.0 kg (incl. battery)	1.0 kg (incl. battery)
Metal gear box	•	•	•
Quick stop	•	•	•
LED	•	-	-
Removable drill chuck	•	-	-
Clockwise and counter-clockwise operation	•	•	•
Number of batteries / number of chargers	1 / 1x 60 min charger	1 / 1x 3-5 h charger	1 / 1x 3-5 h charger
Bits	-	-	-
Packaging	Case	Case	Colour box
Article number	45.132.06	45.136.60	45.136.50



4 006825 599060



4 006825 592436



4 006825 592320

CORDLESS IMPACT DRILL 12 V



	TE-CD 12/1 Li-i (1x 2.0 Ah)	TE-CD 12/1 Li-i (2x 2.0 Ah)
Li-Ion Battery Pack voltage / capacity	12 V / 2.0 Ah	12 V / 2.0 Ah
Charging time	45 min	45 min
Idle speed	0 - 400 / 0 - 1400 min⁻¹	0 - 400 / 0 - 1400 min⁻¹
Blow rate	0 - 6000 / 0 - 21000 min⁻¹	0 - 6000 / 0 - 21000 min⁻¹
Torque (hard)	30 Nm	30 Nm
Torque settings	20+1	20+1
Drill chuck	10 mm	10 mm
Product weight	1.2 kg (incl. battery)	1.2 kg (incl. battery)
Metal gear box	•	•
Quick stop	•	•
LED	•	•
Removable drill chuck	-	-
Clockwise and counter-clockwise operation	•	•
Number of batteries / number of chargers	1 / 1x 45 min charger	2 / 1x 45 min charger
Additional handle	-	-
Packaging	Storage carton with magnetic lock	Storage carton with magnetic lock
Article number	45.138.95	45.138.90



4 006825 647785



4 006825 628692



CORDLESS IMPACT DRIVER 12 V

90 Nm
HIGH POWER



	TE-CI 12 Li (1x 2.0 Ah) EXPERT
Li-Ion Battery Pack voltage / capacity	12 V / 2.0 Ah
Charging time	45 min
Idle speed	0 - 2400 min ⁻¹
Torque (hard)	90 Nm
Bit mount	Internal hexagon 6.35 mm (1/4")
Product weight	1.1 kg (incl. battery)
Brushless motor	-
LED	•
Metal gear box	•
Electronic speed control	•
Number of batteries / number of chargers	1 / 1x 45 min charger
Bit adapter	-
Packaging	Storage carton with magnetic lock
Article number	45.100.50



4 006825 628708

DRYWALL SCREWDRIVER

**AUTO-
START-
STOP**



	TH-DY 500 E CLASSIC
Mains connection	230 V ~ 50 Hz
Rated input	500 W
Idle speed	0 - 2200 min ⁻¹
Tool mounting	Internal hexagon 6.35 mm (1/4")
Product weight	1.7 kg
Aluminium gear head	•
Adjustable screwing depth	•
Automatic start/stop gearing	•
Belt clip	•
Locking button for permanent operation	•
Electronic speed control	•
Packaging	Colour box
Article number	42.599.05



4 006825 587821

IMPACT DRILLS



	TE-ID 1050 CE EXPERT PLUS	TE-ID 950 EXPERT	NEW
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50-60 Hz	
Rated input	1050 W	950 W	
Idle speed	0 - 1000 / 0 - 3000 min ⁻¹	0 - 1100 / 0 - 3000 min ⁻¹	
Blow rate	0 - 15000 / 0 - 45000 min ⁻¹	0 - 16500 / 0 - 45000 min ⁻¹	
Drilling capacity, wood	40 mm	40 mm	
Drilling capacity, cement	16 mm	16 mm	
Drilling capacity, steel	13 mm	13 mm	
Drill chuck	13 mm	13 mm	
Product weight	3.0 kg	3.0 kg	
Speed control electronics	•	•	
Spindle lock	-	-	
Soft grip	•	•	
Metal drill chuck	•	•	
Constant electronics	•	-	
Dust extraction device	•	-	
Additional handle	•	•	
Accessories	-	-	
Packaging	Case	E-Box Basic	
Article number	42.596.20	42.596.25	



IMPACT DRILLS



	TC-ID 1000 E CLASSIC	TC-ID 1000 Kit CLASSIC	TC-ID 1000 E Kit CLASSIC
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	1010 W	1010 W	1010 W
Idle speed	0 - 3000 min ⁻¹	0 - 3000 min ⁻¹	0 - 3000 min ⁻¹
Blow rate	0 - 48000 min ⁻¹	0 - 51000 min ⁻¹	0 - 48000 min ⁻¹
Drilling capacity, wood	32 mm	32 mm	32 mm
Drilling capacity, cement	16 mm	16 mm	16 mm
Drilling capacity, steel	13 mm	13 mm	13 mm
Drill chuck	13 mm	13 mm	13 mm
Product weight	2.1 kg	2.3 kg	2.0 kg
Speed control electronics	•	•	•
Spindle lock	-	-	-
Soft grip	•	•	•
Metal drill chuck	•	-	-
Constant electronics	-	-	-
Dust extraction device	-	-	-
Additional handle	•	•	•
Accessories	-	15-piece drill bits set	16-piece drill bits set
Packaging	Colour box	Case	Bag
Article number	42.598.25	42.598.38	42.598.44



IMPACT DRILLS



	TE-ID 750 E EXPERT	TE-ID 750/1 E EXPERT	TC-ID 720/1 E CLASSIC	TC-ID 720/1 E Kit CLASSIC
Mains connection	220 - 240 V ~ 50-60 Hz	220 - 240 V ~ 50-60 Hz	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	750 W	750 W	720 W	720 W
Idle speed	0 - 2700 min ⁻¹	0 - 2700 min ⁻¹	0 - 2800 min ⁻¹	0 - 2800 min ⁻¹
Blow rate	0 - 43200 min ⁻¹	0 - 43200 min ⁻¹	0 - 44800 min ⁻¹	0 - 44800 min ⁻¹
Drilling capacity, wood	30 mm	30 mm	30 mm	30 mm
Drilling capacity, cement	14 mm	14 mm	13 mm	13 mm
Drilling capacity, steel	12 mm	12 mm	10 mm	10 mm
Drill chuck	13 mm	13 mm	13 mm	13 mm
Product weight	2.2 kg	2.2 kg	2.0 kg	2.0 kg
Speed control electronics	•	•	•	•
Spindle lock	•	•	-	-
Soft grip	•	•	•	•
Metal drill chuck	•	•	-	-
Constant electronics	-	-	-	-
Dust extraction device	•	-	-	-
Additional handle	•	•	•	•
Accessories	-	-	-	5-piece accessory set
Packaging	Case	Case	Colour box	E-Box Basic
Article number	42.596.70	42.596.71	42.598.48	42.598.46



IMPACT DRILLS



	TC-ID 650 E CLASSIC	TE-ID 500 E EXPERT	TC-ID 550 E CLASSIC
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50/60 Hz	220 - 240 V ~ 50/60 Hz
Rated input	650 W	550 W	550 W
Idle speed	0 - 2600 min ⁻¹	0 - 3000 min ⁻¹	0 - 2800 min ⁻¹
Blow rate	0 - 41600 min ⁻¹	0 - 48000 min ⁻¹	0 - 44800 min ⁻¹
Drilling capacity, wood	25 mm	25 mm	25 mm
Drilling capacity, cement	13 mm	10 mm	13 mm
Drilling capacity, steel	10 mm	8 mm	10 mm
Drill chuck	13 mm	13 mm	13 mm
Product weight	1.8 kg	1.7 kg	1.7 kg
Speed control electronics	•	•	•
Spindle lock	-	-	-
Soft grip	-	•	•
Metal drill chuck	-	-	-
Constant electronics	-	-	-
Dust extraction device	-	-	-
Additional handle	•	•	•
Accessories	-	-	-
Packaging	Colour box	Case	Colour box
Article number	42.586.82	42.596.10	42.586.21



ROTARY HAMMERS 2 KG CLASS

ELECTRONIC SPEED CONTROL

The right speed for every application

PNEUMATIC HAMMER MECHANISM

Only slight pressure needs to be applied to achieve high impact force

SDS-PLUS DRILL CHUCK

Easy tool change and optimum power transmission

ADDITIONAL HANDLE

Ergonomic additional handle with soft grip makes every job easier



ROTARY HAMMERS 2 KG CLASS



	TE-RH 28 5F EXPERT	TE-RH 28/1 5F EXPERT
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	950 W	950 W
Idle speed	0 - 1200 / 0 - 2600 min ⁻¹	0 - 1200 / 0 - 2600 min ⁻¹
Blow rate	0 - 4500 min ⁻¹	0 - 4500 min ⁻¹
Impact force	3.0 J	3.0 J
Drilling capacity, cement	28 mm	28 mm
Drill chuck	SDS-plus	SDS-plus
Product weight	3.8 kg	3.8 kg
Speed control electronics	•	•
Vibration-cushioned main handle	-	-
Overload safety stop	•	•
Pneumatic impact mechanism	•	•
Functions	5	5
Lock for continuous operation	•	•
Additional handle	•	•
Metal depth stop	•	•
Accessories	Quick-action chuck	Quick-action chuck
Packaging	E-Box	E-Box
Article number	42.579.70	42.579.72



ROTARY HAMMERS 2 KG CLASS



	TE-RH 26 4F EXPERT	TC-RH 800 4F CLASSIC NEW
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	800 W	800 W
Idle speed	0 - 930 min ⁻¹	0 - 930 min ⁻¹
Blow rate	0 - 4500 min ⁻¹	0 - 4500 min ⁻¹
Impact force	2.6 J	2.6 J
Drilling capacity, cement	26 mm	26 mm
Drill chuck	SDS-plus	SDS-plus
Product weight	3.2 kg	3.2 kg
Speed control electronics	•	•
Vibration-cushioned main handle	-	-
Overload safety stop	•	•
Pneumatic impact mechanism	•	•
Functions	4	4
Lock for continuous operation	•	•
Additional handle	•	•
Metal depth stop	•	•
Accessories	-	-
Packaging	E-Box	E-Box Basic
Article number	42.579.60	42.579.80



ROTARY HAMMERS 2 KG CLASS



	TC-RH 800 E CLASSIC	RT-RH 20/1 EXPERT
Mains connection	230 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	800 W	500 W
Idle speed	0 - 1000 min ⁻¹	0 - 1200 min ⁻¹
Blow rate	0 - 5180 min ⁻¹	0 - 5800 min ⁻¹
Impact force	2.5 J	1.6 J
Drilling capacity, cement	26 mm	20 mm
Drill chuck	SDS-plus	SDS-plus
Product weight	3.3 kg	2.2 kg
Speed control electronics	•	•
Vibration-cushioned main handle	-	-
Overload safety stop	•	•
Pneumatic impact mechanism	•	•
Functions	4	4
Lock for continuous operation	•	•
Additional handle	•	•
Metal depth stop	•	•
Accessories	-	-
Packaging	Case	Case
Article number	42.579.20	42.584.91



ROTARY HAMMERS 5 KG CLASS



ROTARY HAMMERS 5 KG CLASS



	TE-RH 38 3F Kit EXPERT PLUS	TE-RH 32 4F Kit EXPERT PLUS
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1050 W	1250 W
Idle speed	0 - 500 min ⁻¹	0 - 850 min ⁻¹
Blow rate	0 - 4100 min ⁻¹	0 - 4100 min ⁻¹
Impact force	9.0 J	5.0 J
Drilling capacity, cement	38 mm	32 mm
Drill chuck	SDS-max	SDS-plus
Product weight	6.9 kg	5.7 kg
Speed control electronics	•	•
Vibration-cushioned main handle	•	•
Overload safety stop	•	•
Pneumatic impact mechanism	•	•
Functions	3	4
Service interval indicator	•	•
Additional handle	•	•
Metal depth stop	•	•
Accessories	3 SDS-max drill bits / 2 SDS-max chisels	3 SDS-plus drill bits / 2 SDS-plus chisels
Packaging	E-Box	E-Box
Article number	42.579.57	42.579.44



ROTARY HAMMERS 5 KG CLASS



	RT-RH 32 EXPERT	RT-RH 32 Kit EXPERT
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1250 W	1250 W
Idle speed	800 min ⁻¹	800 min ⁻¹
Blow rate	4300 min ⁻¹	4300 min ⁻¹
Impact force	3.5 J	3.5 J
Drilling capacity, cement	32 mm	32 mm
Drill chuck	SDS-plus	SDS-plus
Product weight	6.1 kg	6.1 kg
Speed control electronics	–	–
Vibration-cushioned main handle	•	•
Overload safety stop	•	•
Pneumatic impact mechanism	•	•
Functions	3	3
Service interval indicator	–	–
Additional handle	•	•
Metal depth stop	•	•
Accessories	3 SDS-plus drill bits / 2 SDS-plus chisels	13-piece drill bits / chisels set
Packaging	Case	Case
Article number	42.584.40	42.584.85



ROTARY HAMMERS 5 KG CLASS



	TC-RH 1600 CLASSIC	TC-RH 900 CLASSIC
Mains connection	230 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1600 W	900 W
Idle speed	800 min ⁻¹	850 min ⁻¹
Blow rate	3900 min ⁻¹	4000 min ⁻¹
Impact force	4.0 J	3.0 J
Drilling capacity, cement	32 mm	26 mm
Drill chuck	SDS-plus	SDS-plus
Product weight	5.6 kg	4.1 kg
Speed control electronics	–	–
Vibration-cushioned main handle	•	–
Overload safety stop	•	•
Pneumatic impact mechanism	•	•
Functions	4	3
Service interval indicator	–	–
Additional handle	•	•
Metal depth stop	•	•
Accessories	–	–
Packaging	Case	Case
Article number	42.584.78	42.582.37



DEMOLITION HAMMERS



DEMOLITION HAMMERS



	TE-DH 50 EXPERT PLUS	TC-DH 43 CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1700 W	1600 W
Blow rate	1800 min ⁻¹	1800 min ⁻¹
Impact force	50 J	43 J
Drill chuck	SDS-hex	SDS-hex
Product weight	18.4 kg	14.6 kg
Pneumatic impact mechanism	•	•
Vibration-cushioned main handle	•	-
Lock for continuous operation	•	-
Additional handle	•	•
Accessories	1 pointed chisel, 1 flat chisel	1 pointed chisel, 1 flat chisel
Packaging	E-Box trolley	Case
Article number	41.391.30	41.390.87

4 006825 630305

4 006825 638899

DEMOLITION HAMMERS



	TE-DH 32 EXPERT	TE-DH 12 EXPERT
Mains connection	230 - 240 V ~ 50 Hz	220 - 240 V ~ 50-60 Hz
Rated input	1500 W	1050 W
Blow rate	1900 min ⁻¹	4100 min ⁻¹
Impact force	32 J	12 J
Drill chuck	SDS-max	SDS-max
Product weight	10.8 kg	6.8 kg
Pneumatic impact mechanism	•	•
Vibration-cushioned main handle	•	•
Lock for continuous operation	•	•
Additional handle	•	•
Accessories	1 pointed chisel, 1 flat chisel	1 pointed chisel, 1 flat chisel
Packaging	E-Box	E-Box
Article number	41.390.99	41.391.00

4 006825 650334

4 006825 625219

PAINT/MORTAR MIXERS



	TE-MX 1600-2 CE Twin EXPERT	TE-MX 1600-2 CE EXPERT
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	1600 W	1600 W
Idle speed	180 - 460 / 300 - 750 min ⁻¹	0 - 460 / 0 - 750 min ⁻¹
Stirrer mount	Hex 13 mm	M14
Product weight	3.7 kg (excl. stirrer)	3.5 kg (excl. stirrer)
Speed control electronics	•	•
Constant electronics	•	•
Soft start	•	•
Lock for continuous operation	•	•
Shaft mount for stationary operation	•	•
Soft grip	•	•
Accessories	Mortar twin mixers (Ø 120 mm)	1 mortar stirrer (Ø 133 mm)
Packaging	Colour box	Colour box
Article number	42.585.61	42.585.55



PAINT/MORTAR MIXERS



	TC-MX 1400-2 E CLASSIC	TC-MX 1200 E CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	1400 W	1200 W
Idle speed	0 - 480 / 0 - 780 min ⁻¹	0 - 680 min ⁻¹
Stirrer mount	M14	M14
Product weight	3.5 kg (excl. stirrer)	3.2 kg (excl. stirrer)
Speed control electronics	•	•
Constant electronics	-	-
Soft start	•	•
Lock for continuous operation	•	•
Shaft mount for stationary operation	•	•
Soft grip	•	-
Accessories	1 mortar stirrer (Ø 133 mm)	1 mortar stirrer (Ø 100 mm)
Packaging	Colour box	Colour box
Article number	42.585.50	42.585.45



ANGLE GRINDERS (230 MM)



	TE-AG 230 EXPERT	TE-AG 230/2000 EXPERT
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	2350 W	2000 W
Idle speed	6500 min ⁻¹	6500 min ⁻¹
Wheel diameter	230 mm	230 mm
Product weight	6.0 kg	5.4 kg
Disc guard with quick adjust facility	•	•
Spindle lock	•	•
Soft grip	•	•
Additional handle	can be mounted in 3 positions	can be mounted in 3 positions
Soft start	•	•
Vibration-cushioned main handle	•	–
Rotatable main handle	•	–
Face spanner	•	•
Accessories	–	–
Packaging	Colour box	Colour box
Article number	44.308.70	44.308.40



4 006825 577235



4 006825 593419



ANGLE GRINDERS (125 MM)



Illustration similar

	TE-AG 125 CE EXPERT	TE-AG 125/1010 CE EXPERT NEW
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	1100 W	1010 W
Idle speed	3000 - 12000 min ⁻¹	4000 - 12000 min ⁻¹
Wheel diameter	125 mm	125 mm
Product weight	2.5 kg	2.2 kg
Constant electronics	•	•
Restart safeguard	-	-
Safety switch	•	•
Disc guard with quick adjust facility	•	•
Spindle lock	•	•
Soft grip	•	•
Additional handle	can be mounted in 3 positions	can be mounted in 3 positions
Soft start	•	•
LED operating status indicator	•	-
Face spanner	•	•
Accessories	-	-
Packaging	Colour box	Colour box
Article number	44.308.60	44.308.90



ANGLE GRINDERS (125 MM)



	TE-AG 125/750 EXPERT	TE-AG 125/750 Kit EXPERT
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	750 W	750 W
Idle speed	12000 min ⁻¹	12000 min ⁻¹
Wheel diameter	125 mm	125 mm
Product weight	1.9 kg	1.9 kg
Constant electronics	-	-
Restart safeguard	•	•
Safety switch	•	•
Disc guard with quick adjust facility	•	•
Spindle lock	•	•
Soft grip	•	•
Additional handle	can be mounted in 3 positions	can be mounted in 3 positions
Soft start	-	-
LED operating status indicator	-	-
Face spanner	•	•
Accessories	-	1 segmented cutting wheel, 1 cutting wheel guard
Packaging	Colour box	Case
Article number	44.308.80	44.308.85



ANGLE GRINDERS (125 MM)



	TC-AG 125/1 CLASSIC	TC-AG 125 CLASSIC	TC-AG 125 Kit CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	800 W	850 W	850 W
Idle speed	11000 min ⁻¹	12000 min ⁻¹	12000 min ⁻¹
Wheel diameter	125 mm	125 mm	125 mm
Product weight	1.9 kg	2.1 kg	2.1 kg
Constant electronics	-	-	-
Restart safeguard	•	•	•
Safety switch	•	•	•
Disc guard with quick adjust facility	-	-	-
Spindle lock	•	•	•
Soft grip	-	-	-
Additional handle	can be mounted in 2 positions	can be mounted in 2 positions	can be mounted in 2 positions
Soft start	•	-	-
LED operating status indicator	-	-	-
Face spanner	•	•	•
Accessories	-	-	2 segmented cutting wheels, 1 cutting wheel guard
Packaging	Colour box	Colour box	Colour box
Article number	44.309.70	44.306.19	44.306.24



ANGLE GRINDERS (115 MM)



	TE-AG 115 EXPERT	TE-AG 115/600 EXPERT	TC-AG 115/750 CLASSIC	TC-AG 115 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	720 W	600 W	750 W	500 W
Idle speed	12000 min ⁻¹	12000 min ⁻¹	12000 min ⁻¹	12000 min ⁻¹
Wheel diameter	115 mm	115 mm	115 mm	115 mm
Product weight	1.9 kg	1.9 kg	1.7 kg	1.7 kg
Restart safeguard	•	•	•	•
Safety switch	•	•	•	•
Disc guard with quick adjust facility	•	•	-	-
Spindle lock	•	•	•	•
Soft grip	•	•	-	-
Additional handle	can be mounted in 3 positions	can be mounted in 3 positions	can be mounted in 2 positions	can be mounted in 2 positions
Soft start	-	-	•	-
Cable clip	•	•	-	•
Face spanner	•	•	•	•
Accessories	-	-	-	-
Packaging	Colour box	Colour box	Colour box	Colour box
Article number	44.308.50	44.308.55	44.309.60	44.306.18



WALL LINER



TC-MA 1300

CLASSIC

Mains connection	230 V ~ 50 Hz
Rated input	1320 W
Idle speed	9000 min ⁻¹
Cutting wheel	Ø 125 x Ø 22.2 mm
Channel depth	8 - 30 mm
Channel width	8 - 26 mm
Spindle thread	M14
Product weight	4.9 kg
Infinitely adjustable cutting depth	•
Overload cut-out	•
Soft start	•
Spindle lock	•
Dust extraction	•
Diamond cutting wheel	2 pcs
Packaging	Case
Article number	43.507.30



4 006825 593044

BISCUIT JOINTER



TC-BJ 900

CLASSIC

Mains connection	230 V ~ 50 Hz
Rated input	860 W
Idle speed	11000 min ⁻¹
Max. cutting depth	14 mm
Tilt angle adjustment	90°
Channel cutter	Ø 100 x Ø 22 x 3.8 mm
Product weight	3.3 kg
Infinitely adjustable angle setting	•
Infinitely adjustable height	•
Cutting depth quick-set adjustment	3 settings
Spindle lock	•
Dust extraction	by use of dust bag
Cutter blade	1 pc
Face spanner	•
Packaging	Case
Article number	43.506.20



4 006825 604313

ROUTERS



	TE-RO 1255 E EXPERT	TC-RO 1155 E CLASSIC
Mains connection	230 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	1200 W	1100 W
Idle speed	11000 - 30000 min ⁻¹	11000 - 30000 min ⁻¹
Stroke height	55 mm	55 mm
Max. Form cutter	30 mm	30 mm
Product weight	3.3 kg	3.0 kg
Speed control electronics	•	•
Cutting depth fine adjustment	•	•
Chip shield	•	•
Spindle lock	•	•
Soft grip	•	-
Cable clip	•	-
Parallel stop	•	•
Compass point	•	•
Copy sleeve	•	•
Clamp diameter	6 mm / 8 mm	6 mm / 8 mm
Packaging	Colour box	Colour box
Article number	43.504.90	43.504.70



4 006825 537215



4 006825 580143

PLANERS



	TE-PL 900 EXPERT	TC-PL 750 CLASSIC
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	900 W	750 W
Idle speed	15000 min ⁻¹	17000 min ⁻¹
Planing width	82 mm	82 mm
Chip depth	3 mm	2 mm
Rebate depth	18 mm	10 mm
Product weight	3.6 kg	2.4 kg
Soft grip	•	•
Automatic blade protector	•	•
Aluminium sole plates	•	•
V grooves	3 pcs	1 pc
Chip ejection	double-sided	on one side
Cable clip	•	-
Parallel stop	•	•
Rebate depth stop	•	•
Planing blades (reversible blades)	1 pair TCT	1 pair carbide
Packaging	Colour box	Colour box
Article number	43.453.20	43.453.10



4 006825 645668



4 006825 615029

JIGSAWS



	TE-JS 100 EXPERT	TC-JS 85 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	750 W	620 W
Stroke speed	800 - 3000 min ⁻¹	800 - 3000 min ⁻¹
Cutting depth (wood/plastic/steel)	100 / 12 / 10 mm	85 / 12 / 8 mm
Product weight	2.3 kg	2.0 kg
Universal blade holder	•	–
Pendulum action	4 settings	4 settings
Cutting angle adjustment without tools	•	•
Blade change without tools	•	•
Vacuum cleaner connection	•	–
LED	•	•
Dust-blower function	•	–
Cutting line guide	•	–
Saw blades	1 pc (wood)	1 pc (wood)
Accessories	Parallel stop, chip guard	Parallel stop, chip guard
Packaging	Case	Case
Article number	43.211.60	43.211.40



JIGSAWS



	TC-JS 80/1 CLASSIC	TC-JS 60/1 CLASSIC
Mains connection	220 - 240 V ~ 50/60 Hz	220 - 240 V ~ 50 Hz
Rated input	550 W	400 W
Stroke speed	1000 - 3000 min ⁻¹	1000 - 3000 min ⁻¹
Cutting depth (wood/plastic/steel)	80 / 12 / 10 mm	60 / 10 / 6 mm
Product weight	1.9 kg	1.7 kg
Universal blade holder	–	–
Pendulum action	4 settings	–
Cutting angle adjustment without tools	–	–
Blade change without tools	•	•
Vacuum cleaner connection	•	•
LED	–	–
Dust-blower function	–	–
Cutting line guide	–	–
Saw blades	–	–
Accessories	–	–
Packaging	Colour box	Colour box
Article number	43.211.45	43.211.35



CIRCULAR SAWS



	TE-CS 190/1 <i>EXPERT</i>	TC-CS 1400 <i>CLASSIC</i>
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1500 W	1400 W
Idle speed	5500 min ⁻¹	5200 min ⁻¹
Saw blade	Ø 190 x Ø 30 mm	Ø 190 x Ø 30 mm
Cutting depth 90°	66 mm	66 mm
Cutting depth 45°	48 mm	45 mm
Product weight	5.2 kg	4.3 kg
Adjustment without tools (depth/angle)	•	•
LED	•	–
Aluminium sawing table	•	–
Spindle lock	•	–
Double-sided safety lock-off	•	–
Dust extraction device	•	•
Soft grip	•	–
Accessories	1 saw blade, parallel stop	1 saw blade, parallel stop
Packaging	Colour box	Colour box
Article number	43.310.05	43.309.37



CIRCULAR SAWS



	TE-CS 165 <i>EXPERT</i>	TC-CS 1200 <i>CLASSIC</i>
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1200 W	1230 W
Idle speed	5500 min ⁻¹	5000 min ⁻¹
Saw blade	Ø 165 x Ø 16 mm	Ø 160 x Ø 16 mm
Cutting depth 90°	55 mm	55 mm
Cutting depth 45°	40 mm	37 mm
Product weight	3.8 kg	3.7 kg
Adjustment without tools (depth/angle)	•	•
LED	–	–
Aluminium sawing table	•	–
Spindle lock	•	–
Double-sided safety lock-off	•	–
Dust extraction device	•	•
Soft grip	•	–
Accessories	1 saw blade, parallel stop	1 saw blade, parallel stop
Packaging	Colour box	Colour box
Article number	43.310.10	43.309.36



PLUNGE CUT SAW



	TE-PS 165 EXPERT
Mains connection	220 - 240 V ~ 50 Hz
Rated input	1200 W
Idle speed	5200 min ⁻¹
Saw blade	Ø 165 x Ø 20 mm
Cutting depth 90°	56 mm
Cutting depth 45°	42 mm
Product weight	4.8 kg
Adjustment without tools (depth/angle)	•
LED	-
Aluminium sawing table	•
Spindle lock	•
Dust extraction device	•
Soft grip	•
Cutting line guide	•
Accessories	1 saw blade, parallel stop
Packaging	Colour box
Article number	43.313.00



4 006825 629668

MINI CIRCULAR SAW



	TC-CS 89 CLASSIC	NEW
Mains connection	230 - 240 V ~ 50 Hz	
Rated input	600 W	
Idle speed	6000 min ⁻¹	
Saw blade	Ø 89 x Ø 10 mm	
Cutting depth	27 mm	
Product weight	2.0 kg	
Cutting depth adjustment without tools	•	
Aluminium sawing table	•	
Dust extraction adapter	•	
Soft grip	•	
Accessories	2 saw blades (wood/plastic), 1 diamond cutting wheel, parallel stop	
Packaging	Colour box	
Article number	43.310.30	



4 006825 646054

ALL PURPOSE SAWS



	TE-AP 1050 E EXPERT	TE-AP 950 E EXPERT NEW	TE-AP 750 E EXPERT
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	1050 W	950 W	750 W
Stroke speed	0 - 2700 min ⁻¹	0 - 2500 min ⁻¹	0 - 2800 min ⁻¹
Stroke height	29 mm	28 mm	20 mm
Cutting depth (wood / steel)	200 / 20 mm	200 / 20 mm	150 / 10 mm
Saw blade thickness	0.8 - 1.5 mm	0.8 - 1.5 mm	0.8 - 1.5 mm
Product weight	3.8 kg	3.2 kg	2.4 kg
Blade change without tools	•	•	•
Soleplate adjustment without tools	•	•	•
Soft grip	•	•	•
Rotatable main handle	•	-	-
Pendulum action	2 settings	-	-
Accessories	1 saw blade (wood)	1 saw blade KWB (wood)	1 saw blade KWB (wood)
Packaging	Colour box	Colour box	Colour box
Article number	43.261.35	43.261.80	43.261.70



4 006825 575354



4 006825 632699



4 006825 632682



MULTIFUNCTIONAL TOOLS



	TE-MG 300 EQ EXPERT	TE-MG 300 EQ Kit EXPERT
Mains connection	230 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	300 W	300 W
Oscillating speed	22000 - 40000 min ⁻¹	22000 - 40000 min ⁻¹
Oscillation angle	3.2°	3.2°
Abrasive paper size	93 x 93 x 93 mm	93 x 93 x 93 mm
Product weight	1.5 kg	1.5 kg
Speed control electronics	•	•
Constant electronics	•	•
Soft grip	•	•
Quick-release lock	•	•
Magnetic tool mounting	•	•
Delta grinding/sanding disc	•	•
Abrasive paper	3x P60, 3x P120	3x P60, 3x P120
Scraper	•	•
Grater	-	1x tile adhesive
Plunge-cut blades	Wood/plastic, metal (1x each)	Wood/plastic, metal (1x each)
Segment saw blade	1x wood/plastic/soft metal (HSS), tile joints	Wood/plastic/non-ferrous metal, tile joints, drywall (1x each)
Dust extraction adapter	•	•
Hex key	-	-
Packaging	Case	E-Box
Article number	44.651.50	44.651.51



4 006825 614237



4 006825 635355



MULTIFUNCTIONAL TOOLS



	TE-MG 200 CE <i>EXPERT</i>	TC-MG 220/1 E <i>CLASSIC</i>
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	200 W	220 W
Oscillating speed	30000 - 42000 min ⁻¹	22000 - 44000 min ⁻¹
Oscillation angle	3.0°	3.2°
Abrasives paper size	93 x 93 x 93 mm	93 x 93 x 93 mm
Product weight	1.1 kg	1.3 kg
Speed control electronics	•	•
Constant electronics	•	-
Soft grip	•	•
Quick-release lock	-	-
Magnetic tool mounting	-	•
Delta grinding/sanding disc	•	•
Abrasives paper	3x P60, 3x P120	1x P60
Scrapers	•	•
Grater	-	-
Plunge-cut blades	1x wood/plastic	1x wood/plastic
Segment saw blade	-	-
Dust extraction adapter	•	•
Hex key	•	•
Packaging	Case	Colour box
Article number	44.650.40	44.650.95

4 006825 577204

4 006825 626490

CORDLESS MULTIFUNCTIONAL TOOL



	TE-MG 12 Li <i>EXPERT</i>
Battery voltage / capacity	12 V / 1.3 Ah
Charging time	60 min
Oscillating speed	10000 - 34000 min ⁻¹
Oscillation angle	3.0°
Abrasives paper size	93 x 93 x 93 mm
Product weight	0.8 kg
Speed control electronics	•
Soft grip	•
Number of batteries	1
Delta grinding/sanding disc	•
Abrasives paper	3x P60, 3x P120
Scrapers	•
Plunge-cut blades	1x wood/plastic
Segment saw blade	1x tile joints
Hex key	•
Packaging	Case
Article number	44.650.31

4 006825 579284

CORDLESS GRINDING AND ENGRAVING TOOL

ELECTRONIC SPEED CONTROL WITH LED DISPLAY

Electronic speed control enables the speed to be selected quickly and easily for adjustment to each material

Cordless Grinding and Engraving Tool
TE-MT 7.2 Li

LOCKING KNOB

Locking knob for quickly fastening the tool in the tool chuck

ERGONOMIC SOFTGRIP

The comfortable soft grip ensures a secure grip

LED LIGHT RING

The LED light ensures the optimum illumination of the workpiece



CHARGING STATION

The charging station enables easy charging, safe storage of the cordless grinding and engraving tool and the preferred accessories for quick access and tool changes

CORDLESS GRINDING AND ENGRAVING TOOL



Battery voltage / capacity	7.2 V / 1.5 Ah
Charging time	1 h
Idle speed	5500 - 26000 min ⁻¹
Clamping sleeves, Ø	1.6 mm / 2.4 mm / 3.2 mm
Product weight	0.3 kg
Speed control electronics	•
Spindle lock	•
Soft grip	•
Accessories Set	51 pcs in storage box
Charging station	•
Packaging	Storage carton with magnetic lock
Article number	44.193.30

TE-MT 7.2 Li	EXPERT	NEW
7.2 V / 1.5 Ah		
1 h		
5500 - 26000 min ⁻¹		
1.6 mm / 2.4 mm / 3.2 mm		
0.3 kg		
•		
•		
•		
51 pcs in storage box		
•		
Storage carton with magnetic lock		
44.193.30		



4 006825 639353

GRINDING AND ENGRAVING TOOL

**VERSATILE
APPLICABLE**



	TC-MG 135 E CLASSIC
Mains connection	230 V ~ 50 Hz
Rated input	135 W
Idle speed	10000 - 35000 min ⁻¹
Clamping sleeves, Ø	0.5 / 1.6 / 2.4 / 3.2 mm
Product weight	0.7 kg
Speed control electronics	•
Spindle lock	•
Soft grip	•
Accessories Set	189 pcs in storage box
Telescopic stand	•
Flexible shaft	•
Packaging	Case
Article number	44.191.69



ORBITAL SANDERS



	TE-OS 2520 E EXPERT	TC-OS 1520/1 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	250 W	150 W
Oscillating speed	14000 - 24000 min ⁻¹	24000 min ⁻¹
Oscillating circuit, Ø	2.0 mm	2.0 mm
Grinding/sanding area	230 x 115 mm	187 x 90 mm
Abrasive paper size, hook-and-loop fastening system	230 x 115 mm	187 x 93 mm
Abrasive paper size, clamping mechanism	280 x 115 mm	230 x 93 mm
Product weight	1.9 kg	1.2 kg
Speed control electronics	•	-
Hook-and-loop fastening system	•	•
Clamping mechanism	•	•
Dust extraction	by use of dust collection box & dust extraction adapter	by use of dust extraction adapter
Low vibration	•	-
Aluminium sole plate	•	-
Soft grip	•	•
Abrasive paper	1x P120	3x P120
Packaging	Case	Colour box
Article number	44.606.20	44.606.42



BELT SANDERS



Preistipp
Test
08/2013
sehr machen



	TE-BS 8540 E EXPERT	TC-BS 8038 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	850 W	800 W
Grinding/sanding belt speed	300 - 400 m/min	380 m/min
Grinding/sanding area	75 x 140 mm	76 x 142 mm
Grinding/sanding belt size	75 x 533 mm	76 x 533 mm
Product weight	3.1 kg	3.4 kg
Belt run adjustment	•	•
Belt change without tools	•	•
Dust extraction	by use of dust collection box & dust extraction adapter	by use of dust bag + dust extraction adapter
Soft grip	•	–
Additional handle	•	•
Folding front cover	•	–
Cable clip	•	–
Sanding/grinding belt	1x P80	1x P80
Packaging	Colour box	Colour box
Article number	44.662.30	44.662.60



4 006825 537307



4 006825 598360

DELTA SANDERS



	TE-DS 20 E EXPERT	TC-DS 19 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	200 W	190 W
Oscillating speed	13000 - 20000 min ⁻¹	20000 min ⁻¹
Oscillating circuit, Ø	2.0 mm	1.2 mm
Abrasive paper size	93 x 93 x 93 mm	93 x 93 x 93 mm
Product weight	1.2 kg	1.1 kg
Speed control electronics	•	–
Soft grip	•	–
Hook-and-loop fastening system	•	•
Dust extraction	by use of dust extraction adapter	by use of dust extraction adapter
Soft start	•	–
Cable clip	•	–
Abrasive paper	5x P80, 5x P120	1x P60, 1x P80, 1x P120
Dust extraction adapter	•	•
Packaging	Colour box	Colour box
Article number	44.642.50	44.642.35



4 006825 580686



4 006825 593167

MULTI SANDERS



	TE-OS 1320 EXPERT	TH-OS 1016 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	130 W	100 W
Oscillating speed	24000 min ⁻¹	24000 min ⁻¹
Oscillating circuit, Ø	2.0 mm	1.6 mm
Abrasive paper size	150 x 150 x 100 mm	150 x 150 x 100 mm
Product weight	1.2 kg	1.0 kg
Soft grip	•	•
Hook-and-loop fastening system	•	•
Dust extraction	by use of dust collection box & dust extraction adapter	by use of dust bag + dust extraction adapter
Cable clip	•	–
Abrasive paper	3x P120	1x P120
Packaging	Colour box	Colour box
Article number	44.605.60	44.606.10



ROTATING SANDERS



	TE-RS 40 E EXPERT	TC-RS 38 E CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	400 W	380 W
Oscillating speed	12000 - 24000 min ⁻¹	12000 - 26000 min ⁻¹
Oscillating circuit, Ø	2.5 mm	2.0 mm
Abrasive paper, Ø	125 mm	125 mm
Product weight	2.1 kg	2.0 kg
Speed control electronics	•	•
Hook-and-loop fastening system	•	•
Dust extraction	by use of dust collection box & dust extraction adapter	by use of dust bag + dust extraction adapter
Soft grip	•	–
Additional handle	•	–
Low vibration	•	–
Abrasive paper	–	1x P80
Packaging	Case	Colour box
Article number	44.620.00	44.621.65



WALL PROCESSING SYSTEM DRYWALL POLISHERS

SOFT GRIP SURFACES

For safe and comfortable operation

ADDITIONAL HANDLE

Flexible adjustment to every working situation

Wall Processing System
TE-DW 180

DETACHABLE EDGE

Brush ring with detachable edge allows perimeter work

ELECTRONIC SPEED CONTROL

Using the right speed ensures that the tool is properly adjusted to each material and application

SPINDLE LOCK

The spindle can be locked at the push of a button for changing the sanding/grinding disk quickly and easily

CHANGEABLE SANDING/GRINDING DISC

Sanding/grinding disc for a wide range of sanding/grinding jobs, e.g. drywall work, diamond cup wheel for removing tile adhesive and grinding work on concrete, steel brushes for cleaning concrete surfaces and removing wall-paper residues

WALL PROCESSING SYSTEM



Mains connection	230 - 240 V ~ 50 Hz
Rated input	1300 W
Idle speed	800 - 1750 min ⁻¹
Abrasive paper dimensions	Ø 180 mm
Device length	-
Hose length	-
Cable length	4.0 m
Product weight	3.5 kg
Speed control electronics	•
Adjustable grinding head	•
Round sanding/grinding disc	•
Delta sanding/grinding disc	-
Diamond cup wheel	•
Steel brushes	•
Folding and height-adjustable long handle	-
Supporting foot	-
Round sanding discs	2x P60, 2x P80, 2x P120
Triangular sanding discs	-
Round abrasive mesh	-
Delta abrasive mesh	-
Packaging	Colour box
Article number	42.599.40

TE-DW 180	EXPERT
Mains connection	230 - 240 V ~ 50 Hz
Rated input	1300 W
Idle speed	800 - 1750 min ⁻¹
Abrasive paper dimensions	Ø 180 mm
Device length	-
Hose length	-
Cable length	4.0 m
Product weight	3.5 kg
Speed control electronics	•
Adjustable grinding head	•
Round sanding/grinding disc	•
Delta sanding/grinding disc	-
Diamond cup wheel	•
Steel brushes	•
Folding and height-adjustable long handle	-
Supporting foot	-
Round sanding discs	2x P60, 2x P80, 2x P120
Triangular sanding discs	-
Round abrasive mesh	-
Delta abrasive mesh	-
Packaging	Colour box
Article number	42.599.40



4 006825 632750

DRYWALL POLISHERS



	TE-DW 225 X EXPERT	TC-DW 225 CLASSIC
Mains connection	230 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	750 W	600 W
Idle speed	600 - 1800 min ⁻¹	600 - 1500 min ⁻¹
Abrasive paper dimensions	Ø 225 mm / 285 x 285 x 285 mm	Ø 225 mm
Device length	110 - 165 cm	110 - 165 cm
Hose length	4.0 m	4.0 m
Cable length	4.0 m	4.0 m
Product weight	3.2 kg	3.2 kg
Speed control electronics	•	•
Adjustable grinding head	•	•
Round sanding/grinding disc	•	•
Delta sanding/grinding disc	•	-
Diamond cup wheel	-	-
Steel brushes	-	-
Folding and height-adjustable long handle	•	•
Supporting foot	•	•
Round sanding discs	1x P60, 1x P80, 1x P120	2x P60, 2x P80, 2x P120
Triangular sanding discs	1x P60, 1x P80, 1x P120	-
Round abrasive mesh	1x P80	-
Delta abrasive mesh	1x P80	-
Packaging	E-Box	Case
Article number	42.599.60	42.599.30



ELECTRIC PAINT SPRAY SYSTEMS



ELECTRIC PAINT SPRAY SYSTEMS

For spraying lacquers and varnishes, for example on garden sheds, patios and decks, fences or garden furniture. Thanks to the ANYPAINT technology it is possible to spray not

just lacquers and varnishes but interior wall paints as well with just the one device.



ELECTRIC PAINT SPRAY SYSTEMS (SEMI-STATIONARY)



	TC-SY 700 S CLASSIC	TC-SY 600 S CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	700 W	600 W
Delivery rate	1000 ml/min	1000 ml/min
Tank volume	1000 ml	800 ml
Hose length	3.5 m	1.8 m
Product weight	3.0 kg	2.3 kg
Processing	Lacquers, glazes, interior wall paints	Lacquers, glazes, interior wall paints
Removable spray cap	•	•
Control of the paint delivery rate	•	Vertical, horizontal and round jet
Paint jet	Vertical, horizontal and round jet	•
Soft grip	•	•
Shoulder strap	•	•
Slide	•	-
Spray nozzles	Ø 2.5 mm, Ø 3.0 mm	Ø 2.5 mm, Ø 3.0 mm
Cleaning brush and needle	•	•
Tank for testing the viscosity	•	800 ml
Paint tank with cover	1000 ml	Colour box
Packaging	Colour box	Colour box
Article number	42.600.20	42.600.15



ELECTRIC PAINT SPRAY SYSTEMS (SPRAY GUN)



	TC-SY 500 P CLASSIC	TC-SY 400 P CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	500 W	400 W
Delivery rate	550 ml/min	500 ml/min
Tank volume	1000 ml	800 ml
Hose length	-	-
Product weight	1.3 kg	1.3 kg
Processing	Lacquers, glazes	Lacquers, glazes
Removable spray cap	•	•
Control of the paint delivery rate	•	Vertical, horizontal and round jet
Paint jet	Vertical, horizontal and round jet	•
Soft grip	•	•
Suspension fixture	•	•
Spray nozzles	Ø 2.0 mm, Ø 2.5 mm	Ø 2.0 mm, Ø 2.5 mm
Cleaning brush and needle	•	•
Tank for testing the viscosity	•	•
Paint tank with cover	1000 ml	800 ml
Packaging	Colour box	Colour box
Article number	42.600.10	42.600.05



HOT GLUE GUN**CORDLESS HOT GLUE GUN**

	TC-GG 30 CLASSIC
Mains connection	220 - 240 V ~ 50 Hz
Rated input	30 W
Warm-up period	300 s
Max. temperature	195 °C
Glue stick diameter	11 mm
Glue stick length	150 mm
Product weight	0.2 kg
Mechanical glue stick feeding	•
Viewing window	•
Support bar	•
Glue sticks	3 pcs
Standard nozzle	•
Flat nozzle	•
Extension nozzle	•
Packaging	Colour box
Article number	45.221.70

4 006825 614022

	TC-CG 3.6/1 Li CLASSIC
Li-Ion Battery Pack voltage / capacity	3.6 V / 1.5 Ah
Charging time	3 - 5 h
Warm-up period	30 s
Max. temperature	160 °C
Glue stick diameter	7 mm
Glue stick length	150 mm
Product weight	0.3 kg
LED status indicator	•
Mechanical glue stick feeding	•
Support bar	•
Accessories	4 glue sticks
Packaging	Metal box
Article number	45.221.90

4 006825 637854

ELECTRIC TACKER**CORDLESS TACKER**

	TC-EN 20 E CLASSIC
Mains connection	220 - 240 V ~ 50 Hz
Shots per minute	20
Staples type	53
Staple length	6 - 14 mm
Staple width	11.4 mm
Staple size	0.75 mm
Nail type	47
Nail length	14 mm
Nail size	1.16 - 1.26 mm
Product weight	1.1 kg
Safety lug	•
Soft grip	•
Magazine level indication	•
Impact force preset	•
Staples (type 53)	1000 pcs
Nails (type 47)	500 pcs
Packaging	Colour box
Article number	42.578.90

4 006825 615647

	TC-CT 3.6 Li CLASSIC
Battery voltage	3.6 V
Battery capacity	1.3 Ah
Charging time	3 - 5 h
Shots per minute	30
Staples type	53
Staple length	6 - 14 mm
Staple width	11.4 mm
Staple size	0.75 mm
Product weight	0.9 kg
Safety lug	•
Soft grip	•
Magazine level indication	•
Charge status indicator	•
Staples (type 53)	1000 pcs
Battery charger	•
Packaging	Metal box
Article number	42.578.80

4 006825 607291

HOT AIR GUNS



	TE-HA 2000 E EXPERT
Mains voltage	220 - 240 V ~ 50 Hz
Rated input	2000 W
Air rate	250 / 250 / 500 l/min
Temperature	50 / 50 - 550 / 50 - 550 °C
Product weight	0.9 kg
Air rate and temperature control system	3 settings
Cold setting	•
Ceramic heater	•
Overheating guard	•
Storage area	•
Temperature adjustment, 9 levels	•
Wide nozzle	•
Reducer nozzle	•
Reflector nozzle	•
Heat nozzle	•
Paint scraper	-
Packaging	Case
Article number	45.201.95



HOT AIR GUNS



	TH-HA 2000/1 CLASSIC	TC-HA 2000/1 CLASSIC
Mains voltage	230 / 240 V ~ 50 Hz	230 / 240 V ~ 50 Hz
Rated input	2000 W	2000 W
Air rate	300 / 500 l/min	300 / 500 l/min
Temperature	350 / 550 °C	350 / 550 °C
Product weight	0.7 kg	0.7 kg
Air rate and temperature control system	2 settings	2 settings
Cold setting	-	-
Ceramic heater	-	-
Overheating guard	•	•
Storage area	•	•
Temperature adjustment, 9 levels	-	-
Wide nozzle	•	•
Reducer nozzle	•	•
Reflector nozzle	•	-
Heat nozzle	•	-
Paint scraper	•	-
Packaging	Case	Colour box
Article number	45.201.79	45.201.84



360° CROSS LASER LEVEL




	TE-LL 360 EXPERT
Laser diode	650 nm (horizontal), 635 nm (vertical)
Laser class	2
Work area Ø	20 m
Precision	+/- 0.4 mm/m
Self-levelling time	< 5 s
Levelling range	+/- 4°
Tripod socket	1/4"
Product weight	0.3 kg
Laser crosshair	•
Horizontal and/or vertical laser line	•
Horizontal 360° laser line	•
Self-levelling	•
Digital spirit level	•
Soft grip	•
Storage case	•
Height-adjustable wall mount	•
Universal clamp	-
Batteries	-
Packaging	Colour box
Article number	22.701.10



4 006825 616248

LASER DISTANCE METERS IN ACTION



FUNCTIONS

- 1** Levelling function: The Einhell cross-line laser helps make easy work of placing objects at the same level.
- 2** Einhell cross-line laser project a vertical and a horizontal laser line simultaneously, which you can use to make easy work of aligning objects exactly and uniformly.
- 3** The TE-LL 360 projects a horizontal 360° line for effortless and precise alignment of objects in a room (see picture below right).



CROSS LASER LEVEL



TC-LL 2 CLASSIC	
Laser diode	635 nm
Laser class	2
Work area	8 m
Precision	+/- 0.5 mm/m
Self-levelling time	< 5 s
Levelling range	+/- 4°
Tripod socket	1/4"
Product weight	0.2 kg
Laser crosshair	•
Horizontal and/or vertical laser line	•
Horizontal 360° laser line	-
Self-levelling	•
Digital spirit level	•
Soft grip	•
Storage case	•
Height-adjustable wall mount	-
Universal clamp	•
Batteries	-
Packaging	Colour box
Article number	22.701.05



4 006825 616231

LASER DISTANCE METERS



	TE-LD 60 EXPERT	TC-LD 50 CLASSIC	TC-LD 25 CLASSIC
Laser diode	635 nm	635 nm	635 nm
Laser class	2	2	2
Measuring range	0.05 - 60 m	0.05 - 50 m	0.05 - 25 m
Measurement accuracy	+/- 2.0 mm/m	+/- 2.0 mm/m	+/- 3.0 mm/m
Switches off automatically	from 3 min	from 3 min	from 3 min
Measurement reference	Front edge, back edge or stop plate	Front edge, back edge or stop plate	Front edge or back edge
Product weight	0.1 kg	0.1 kg	0.1 kg
Compatible with the mobile app via Bluetooth®	•	-	-
Measurement of lengths, areas and volumes	• of lengths, areas and volumes	• of lengths, areas and volumes	• -
Addition and subtraction	-	-	-
Continuous measurements with min/max function	•	•	•
Safety function	•	•	•
Pythagoras function	•	•	-
Disconnection function	•	•	-
Last measurements are saved automatically	50	20	-
Soft grip	•	•	•
Storage case	•	•	•
Batteries	-	-	-
Packaging	Colour box	Colour box	Colour box
Article number	22.700.85	22.700.80	22.700.75



4 006825 620924





4 006825 616194



4 006825 616187

LASER DISTANCE METERS IN ACTION – PERFECT PRECISION

- 1** Simple measurement of areas, e.g. to determine the amount of wall paint needed.
- 2** Pitch function: Ability to create predefined uniform spacing using the pitch function, e.g. for determining the correct spacing between fence or railing posts.
- 3** Simple measurement of distances, e.g. to determine the amount of skirting boards needed.
- 4** Simple measurement of volumes, e.g. to determine room volumes for HVAC systems.
- 5** Indirect determination of heights and lengths in places that are difficult or impossible to access using the Pythagoras function (see picture below right).

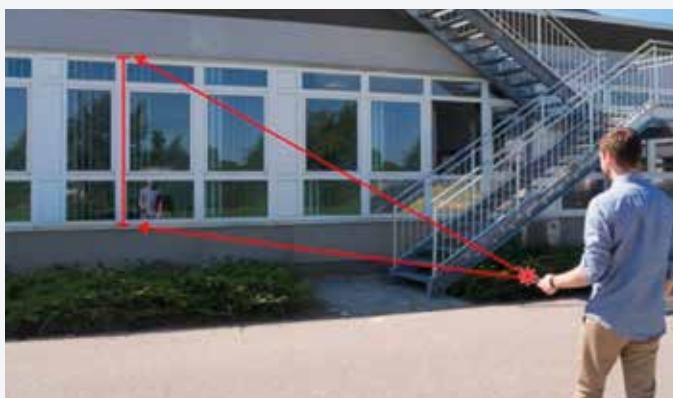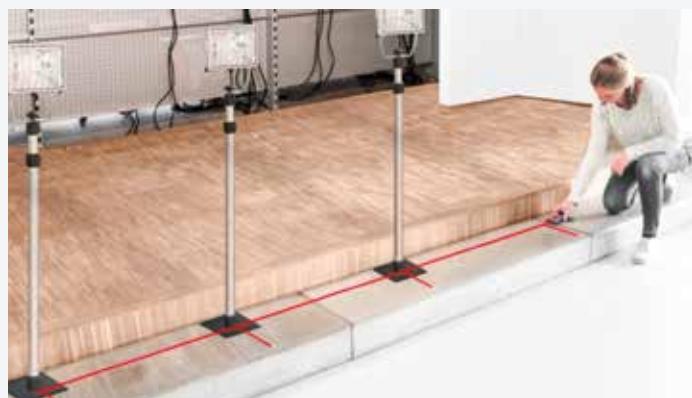

LASER LEVELLING



	TC-LL 1 CLASSIC
Laser diode	650 nm
Laser class	2
Work area	Laser line: 5 m, laser dot: 20 m
Precision	+/- 0.5 mm/m
Product weight	0.1 kg
Spirit level function	•
Soft grip	•
Flexible wall mount	•
Batteries	-
Packaging	Colour box
Article number	22.700.95



4 006825 616217

DIGITAL DETECTOR



	TC-MD 50 CLASSIC
Max. scanning depth: wood	19 mm
Max. scanning depth: non-ferrous metals	19 mm
Max. scanning depth: ferrous metals	50 mm
Max. scanning depth: copper	38 mm
Max. scanning depth: live wires	50 mm
Switches off automatically	from 1 min
Product weight	0.1 kg
Acoustic warning signal	•
Wall protection	•
Soft grip	•
Batteries	-
Packaging	Colour box
Article number	22.700.90



4 006825 616200

STATIONARY POWER TOOLS






SLIDING MITRE SAWS / MITRE SAWS

VARIABLE MITRE CUTS

For performing mitre cuts easily the saw head can be tilted 45° to the left or right and the table can be turned up to 47° to the left or right

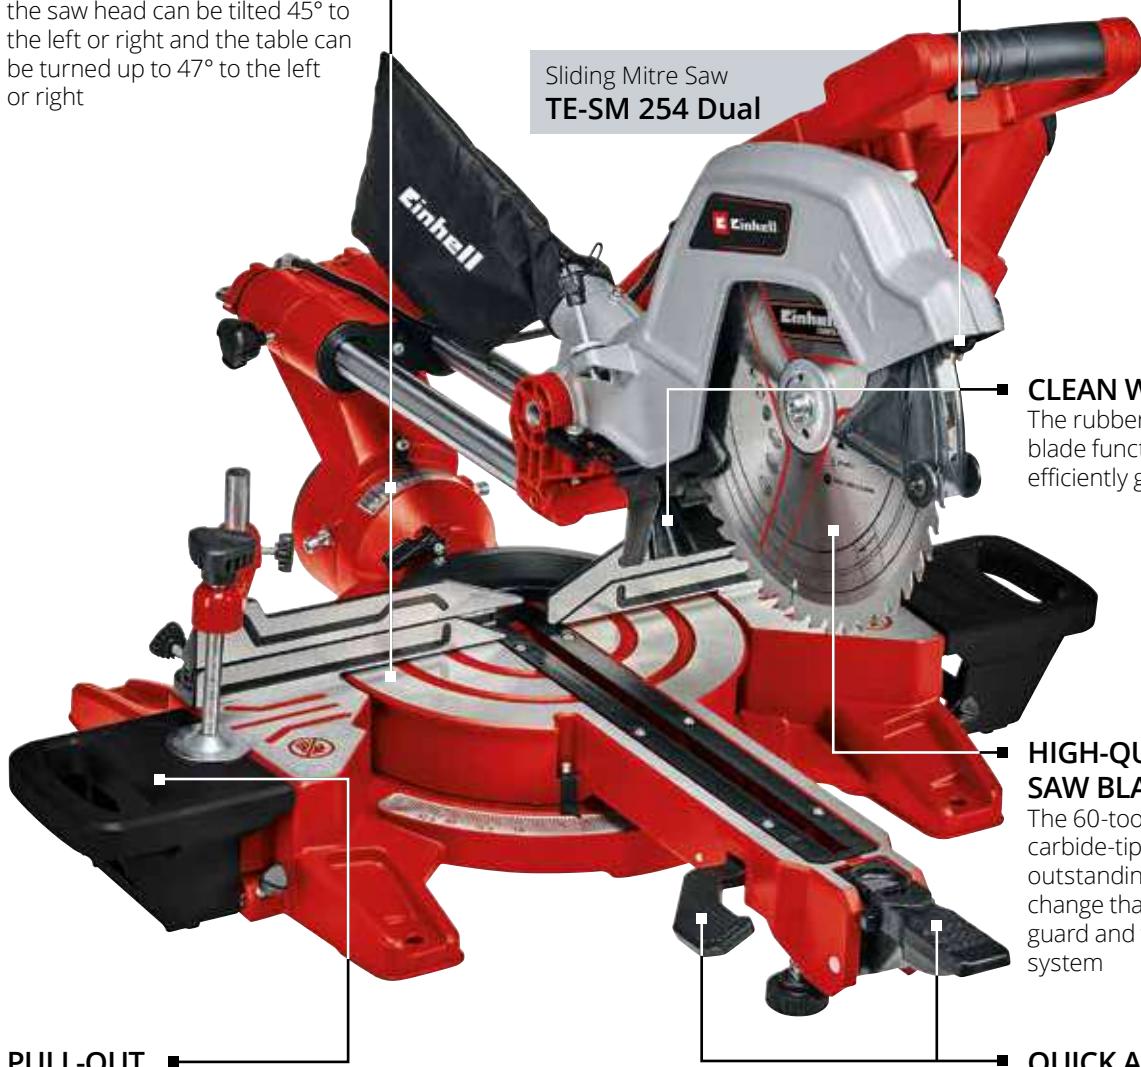

PULL-OUT SIDE SUPPORTS

For wide workpieces the two side tables can also be pulled out to provide a larger support surface

CUTTING LINE LASER

The powerful cutting line laser is a great help for working efficiently with the machine

CLEAN WORK AREA

The rubber clip behind the saw blade functions like a funnel and efficiently guides the dust away

HIGH-QUALITY SAW BLADE

The 60-tooth saw blade with carbide-tipped teeth delivers an outstanding cut and is easy to change thanks to the open blade guard and the spindle locking system

QUICK ANGLE ADJUSTMENT

For quick and easy angle adjustment there are lever mechanisms on the side of the machine at the front

SLIDING MITRE SAWS



	TE-SM 254 Dual EXPERT	TE-SM 2534 Dual EXPERT
Mains connection	220 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	2100 W S6 25%	1800 W S1
Speed	4800 min ⁻¹	5100 min ⁻¹
Saw blade	Ø 254 x Ø 30 mm	Ø 250 x Ø 30 mm
Number of teeth	60	48
Turning range of the table	-47° to +47°	-47° to +47°
Angle adjustment of the saw blade	-45° to +45°	-45° to +45°
Max. cutting capacity at 90°	305 x 85 mm	310 x 90 mm
Product weight	15.5 kg	15.7 kg
Saw blade tilting	left / right	left / right
Laser	•	•
Light	-	•
Soft start-up	-	•
X-Tend support with limit stop	-	•
Dust funnel	•	-
Quick-adjust facility for the saw table	•	-
Quick-adjust facility for the tilt of the saw head	•	-
Precision TCT saw blade	1 pc	1 pc
Article number	43.008.75	43.008.70



4 006825 635744



4 006825 599534

SLIDING MITRE SAWS



	TC-SM 2534/1 Dual CLASSIC	TC-SM 254 CLASSIC	TC-SM 2531/2 U CLASSIC
Mains connection	230 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	2350 W S6 25%	1900 W S6 25%	1900 W S1
Speed	4000 min ⁻¹	5000 min ⁻¹	4800 min ⁻¹
Saw blade	Ø 250 x Ø 30 mm	Ø 254 x Ø 30 mm	Ø 254 x Ø 30 mm
Number of teeth	48	48	48
Turning range of the table	-47° to +47°	-47° to +47°	-45° to +45°
Angle adjustment of the saw blade	-45° to +45°	0° to 45° to the left	0° to 45° to the left
Max. cutting capacity at 90°	340 x 75 mm	305 x 85 mm	310 x 70 mm
Product weight	14.3 kg	14.9 kg	16.8 kg
Saw blade tilting	left / right	left	left
Laser	•	•	•
Dust funnel	•	•	-
Quick-adjust facility for the saw table	-	•	-
Base frame	-	-	Working height 84 cm
Precision TCT saw blade	1 pc	1 pc	1 pc
Article number	43.003.95	43.003.85	43.008.05



4 006825 644890



4 006825 635713



4 006825 645637

SLIDING MITRE SAWS



	TE-SM 2131 Dual EXPERT	TE-SM 216 Dual EXPERT	NEW
Mains connection	230 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	
Rated input	1600 W S6 20%	1800 W S6 25%	
Speed	5000 min ⁻¹	5000 min ⁻¹	
Saw blade	Ø 210 x Ø 30 mm	Ø 216 x Ø 30 mm	
Number of teeth	48	60	
Turning range of the table	-47° to +47°	-47° to +47°	
Angle adjustment of the saw blade	-45° to +45°	-45° to +45°	
Max. cutting capacity at 90°	310 x 65 mm	305 x 65 mm	
Product weight	12.5 kg	13.9 kg	
Saw blade tilting	left / right	left / right	
Laser	•	•	
Light	•	—	
Soft start-up	•	—	
X-Tend support with limit stop	•	—	
Dust funnel	—	•	
Quick-adjust facility for the saw table	—	•	
Quick-adjust facility for the tilt of the saw head	—	•	
Precision TCT saw blade	1 pc	1 pc	
Article number	43.008.60	43.008.65	



SLIDING MITRE SAWS



	TC-SM 2131/1 Dual CLASSIC	TC-SM 216 CLASSIC	NEW
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	
Rated input	1800 W S2 5 min	1600 W S6 25%	
Speed	4900 min ⁻¹	5200 min ⁻¹	
Saw blade	Ø 210 x Ø 30 mm	Ø 216 x Ø 30 mm	
Number of teeth	48	48	
Turning range of the table	-47° to +47°	-47° to +47°	
Angle adjustment of the saw blade	-45° to +45°	0° to 45° to the left	
Max. cutting capacity at 90°	310 x 62 mm	305 x 65 mm	
Product weight	11.0 kg	12.7 kg	
Saw blade tilting	left / right	left	
Laser	•	•	
Light	—	—	
Soft start-up	—	—	
X-Tend support with limit stop	—	—	
Dust funnel	•	•	
Quick-adjust facility for the saw table	—	•	
Quick-adjust facility for the tilt of the saw head	—	—	
Precision TCT saw blade	1 pc	1 pc	
Article number	43.003.90	43.003.80	



MITRE SAWS



	TC-MS 2513 L CLASSIC	TC-MS 2112 CLASSIC	TC-MS 216 CLASSIC
Mains connection	230 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	1600 W S1	1600 W S6 40%	1600 W S6 25%
Speed	4000 min ⁻¹	5000 min ⁻¹	5000 min ⁻¹
Saw blade	Ø 250 x Ø 30 mm	Ø 210 x Ø 30 mm	Ø 216 x Ø 30 mm
Number of teeth	48	48	48
Turning range of the table	-47° to +47°	-45° to +45°	-47° to +47°
Angle adjustment of the saw blade	0° to 45° to the left	0° to 45° to the left	0° to 45° to the left
Max. cutting capacity at 90°	130 x 75 mm	120 x 55 mm	120 x 60 mm
Product weight	10.1 kg	7.1 kg	8.3 kg
Saw blade tilting	left	left	left
Laser	•	-	-
Dust funnel	-	-	•
Precision TCT saw blade	1 pc	1 pc	1 pc
Article number	43.008.50	43.002.95	43.003.70



4 006825 592122



4 006825 584929



4 006825 635683

MITRE SAWS WITH UPPER TABLE



	TC-MS 3017 T CLASSIC	TC-MS 2513 T CLASSIC	TC-MS 2112 T CLASSIC
Mains connection	230 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	2000 W S1	1800 W S1	1200 W S1
Speed	4200 min ⁻¹	4500 min ⁻¹	4500 min ⁻¹
Saw blade	Ø 305 x Ø 30 mm	Ø 250 x Ø 30 mm	Ø 210 x Ø 30 mm
Number of teeth	40	36	24
Turning range of the table	-45° to +45°	-45° to +45°	-45° to +45°
Angle adjustment of the saw blade	0° to 45° to the left	0° to 45° to the left	0° to 45° to the left
Max. cutting capacity at 90°	170 x 85 mm	130 x 75 mm	120 x 55 mm
Product weight	18.8 kg	13.5 kg	9.4 kg
Saw blade tilting	left	left	left
Laser	-	-	-
Clamping device	•	•	•
Precision TCT saw blade	1 pc	1 pc	1 pc
Article number	43.003.47	43.003.45	43.003.17



4 006825 613056



4 006825 584967



4 006825 584950

TABLE SAWS

ALUMINUM MAIN TABLE WITH SLIDE

The aluminium main table is extremely torsion-resistant and sturdy. The carriage makes light work of cutting boards and panels exactly to size

Table Saw
TE-CC 250 UF



SOFT START FUNCTION

The integrated electronic soft starter provides protection for both the motor gear system and the household fuses

TABLE EXTENSIONS FOR LARGER WORKPIECES

The individually adjustable table extensions on the right-hand side and at the back on the main table prevent long workpieces from tilting and ensure that unwieldy boards can be safely sawed

PARALLEL STOP AND CROSS STOP

Easy to use stops for making mitre cuts or parallel cuts

FOLD DOWN BASE FRAME WITH TROLLEY FUNCTION

For mobile use of space-saving storage the equipment has a fold down base frame and chassis

TABLE SAWS WITH BASE FRAME



	TE-CC 250 UF EXPERT	TE-TS 250 UF EXPERT	TC-TS 2225 U CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	2000 W S6 20%	2000 W S6 20%	2200 W S6 25%
Speed	4500 min ⁻¹	4500 min ⁻¹	4250 min ⁻¹
Saw blade	Ø 250 x Ø 30 mm	Ø 250 x Ø 30 mm	Ø 254 x Ø 30 mm
Number of teeth	48	48	48
Mitre cut	0° to 45° to the left	0° to 45° to the left	0° to 45° to the left
Cutting height 90°	78 mm	78 mm	80 mm
Cutting height 45°	53 mm	53 mm	55 mm
Bench size	645 x 530 mm	645 x 455 mm	580 x 555 mm
Max. support surface	865 x 795 mm	775 x 675 mm	780 x 1055 mm
Product weight	33.1 kg	30.5 kg	17.5 kg
Base frame	•	•	•
Table extension	right / rear	left / right / rear	left / right / rear
Folding base frame	•	•	-
Format function	•	-	-
Soft start-up	•	•	•
Precision TCT saw blade	1 pc	1 pc	1 pc
Parallel stop	•	•	•
Angle stop	•	•	•
Article number	43.405.39	43.405.68	43.405.15



4 006825 647518



4 006825 647501



4 006825 641349

TABLE SAWS WITH BASE FRAME



	TC-TS 254 U CLASSIC	TC-TS 2025/2 U CLASSIC	TC-TS 254 eco CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	2200 W S6 25%	2000 W S6 25%	2050 W S6 40%
Speed	4250 min ⁻¹	5000 min ⁻¹	4250 min ⁻¹
Saw blade	Ø 254 x Ø 30 mm	Ø 250 x Ø 30 mm	Ø 254 x Ø 30 mm
Number of teeth	24	24	24
Mitre cut	0° to 45° to the left	0° to 45° to the left	0° to 45° to the left
Cutting height 90°	80 mm	85 mm	80 mm
Cutting height 45°	55 mm	65 mm	55 mm
Bench size	580 x 555 mm	583 x 563 mm	580 x 555 mm
Max. support surface	580 x 855 mm	583 x 893 mm	580 x 555 mm
Product weight	21.9 kg	18.8 kg	18.0 kg
Base frame	•	•	•
Table extension	left / right	left / right	-
Folding base frame	-	-	-
Precision TCT saw blade	1 pc	1 pc	1 pc
Parallel stop	•	•	•
Angle stop	•	•	•
Article number	43.405.10	43.404.90	43.405.05



4 006825 646320



4 006825 646474



4 006825 646337

TABLE SAWS WITH BASE FRAME



	TE-TS 315 UD EXPERT	TE-TS 315 U EXPERT	TC-TS 315 U CLASSIC
Mains connection	400 V ~ 50 Hz	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	2800 W S6 20%	2200 W S6 20%	2000 W S6 40%
Speed	2950 min ⁻¹	2950 min ⁻¹	2950 min ⁻¹
Saw blade	Ø 315 x Ø 30 mm	Ø 315 x Ø 30 mm	Ø 315 x Ø 30 mm
Number of teeth	24	24	40
Mitre cut	0° to 45° to the left	0° to 45° to the left	0° to 45° to the left
Cutting height 90°	85 mm	85 mm	85 mm
Cutting height 45°	55 mm	55 mm	55 mm
Bench size	800 x 550 mm	800 x 550 mm	800 x 550 mm
Table extension	740 x 550 mm	740 x 550 mm	740 x 400 mm
Product weight	54.0 kg	53.5 kg	52.0 kg
Base frame	•	•	•
Table extension	rear, foldable	rear, foldable	rear
Induction motor	•	•	•
Suitable for slides	•	•	•
Precision TCT saw blade	1 pc	1 pc	1 pc
Parallel stop	•	•	•
Angle stop	•	•	•
Article number	43.405.58	43.405.57	43.405.56



4 006825 646542



4 006825 646535



4 006825 640083

TABLE SAWS



	TC-TS 210 CLASSIC	TC-TS 200 CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	230 - 240 V ~ 50 Hz
Rated input	1200 W S6 40%	800 W S6 15%
Speed	4800 min ⁻¹	2950 min ⁻¹
Saw blade	Ø 210 x Ø 30 mm	Ø 200 x Ø 16 mm
Number of teeth	24	24
Mitre cut	0° to 45° to the left	0° to 45° to the left
Cutting height 90°	45 mm	45 mm
Cutting height 45°	27 mm	27 mm
Bench size	525 x 440 mm	500 x 335 mm
Max. support surface	525 x 440 mm	500 x 335 mm
Product weight	11.3 kg	11.6 kg
Precision TCT saw blade	1 pc	1 pc
Parallel stop	•	•
Angle stop	•	•
Article number	43.404.25	43.404.15



4 006825 647273



4 006825 647266

STATIONARY PLANER



	TC-SP 204 CLASSIC
Mains connection	230 - 240 V ~ 50 Hz
Rated input	1500 W
Speed	9000 min ⁻¹
Max. working width	204 mm
Max. removal	3 mm
Max. thickness opening	120 mm
Max. angle of the parallel stop	45°
Dust extraction connector	100 mm
Product weight	27.2 kg
Infeed table	•
Removable table	•
Accessories	2 planing blades
Push stick	•
Article number	44.199.55



4 006825 615104

SCROLL SAW



	TC-SS 405 E CLASSIC
Mains connection	230 V ~ 50 Hz
Rated input	120 W S2 10 min
Stroke speed	400 - 1600 min ⁻¹
Stroke height	14 mm
Reach	406 mm
Mitre cut	0° to 45° to the left
Cutting height 90°	52 mm
Cutting height 45°	20 mm
Product weight	12.5 kg
Flexible shaft for precision working	-
Foot pedal switch	-
Workpiece hold-down device	•
Blowing function	•
Adapter for coping saw blade	•
Dust extraction	•
Saw blade	2 pcs
Accessories for flexible shaft	-
Article number	43.090.40



4 006825 589900

BAND SAWS

2 BLADE SPEED SETTINGS

The band saw can be powered with two different blade speed settings to deliver exact cutting results at the optimum speed in every material

ANGLE STOP AND PARALLEL STOP

The angle stop and parallel stop can be used for high-quality sawing jobs for all the requirements of creative DIY jobs



INFINITELY TILTABLE SAW TABLE

The robust saw table can be infinitely tilted between 0° and 45° for performing exact mitre cuts quickly and easily

CONNECTION FOR DUST EXTRACTION

For efficient dust extraction the equipment has a 70 mm or 100 mm connection

BASE FRAME

The sturdy base frame guarantees outstanding stability and an optimum working height

BAND SAWS



	TC-SB 305 U CLASSIC	TC-SB 200/1 CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Rated input	750 W	250 W S2 15 min
Blade speed	370 m/min 800 m/min	900 m/min
Reach	305 mm	200 mm
Dust extraction connector	Ø 70 mm / Ø 100 mm	Ø 36 mm
Mitre cut	0° to 45°	-2° to 45°
Cutting height 90°	170 mm	80 mm
Cutting height 45°	75 mm	45 mm
Product weight	64.6 kg	17.4 kg
Speeds	2	1
Base frame	•	-
LED	-	-
Parallel stop	•	•
Angle stop	•	-
Article number	43.080.55	43.080.18



WOODWORKING LATHE



	TC-WW 1000/1 CLASSIC
Mains connection	230 V ~ 50 Hz
Rated input	400 W S2 30 min
Speed 1	890 min ⁻¹
Speed 2	1260 min ⁻¹
Speed 3	1760 min ⁻¹
Speed 4	2600 min ⁻¹
Max. lathe diameter	280 mm
Tip width	1000 mm
Product weight	22.9 kg
V-belt drive which can be adjusted to 4 settings	•
Face plate	•
Tool support	•
Tailstock	•
Front end driver ring	•
Article number	43.121.10



4 006825 633924

VACUUM EXTRACTION SYSTEM



	TE-VE 550/1 A EXPERT	NEW
Mains connection	220 - 240 V ~ 50-60 Hz	
Rated input	550 W S1	
Speed	2850 min ⁻¹	
Debris bag volume	65 l	
Air capacity	1150 m ³ /h	
Vacuum	max. 1600 Pa	
Hose length	2.5 m	
Product weight	20.8 kg	
Automatic socket	•	
Handle	•	
Chassis	•	
Debris bag support	•	
Quick release fastener for changing the debris bag	•	
Induction motor	•	
Catch basket	•	
Reduzieradapterset 5tlg.	•	
Article number	43.041.56	



4 006825 648058

WET AND DRY VACUUM CLEANERS



WET AND DRY VACUUM CLEANERS

INCL.
NUMEROUS
ACCESSORIES



	TE-VC 2340 SAC EXPERT	TE-VC 2340 SA EXPERT
Mains connection	220 - 240 V ~ 50/60 Hz	220 - 240 V ~ 50 Hz
Rated input	1200 W S1	1200 W S1
Suction power	230 mbar	230 mbar
Tank volume	40 l	40 l
Suction hose length / diameter	300 cm / 36 mm	300 cm / 36 mm
Product weight	11.0 kg	10.9 kg
Cable holder	•	•
Blow connector	•	•
Accessory mount	•	•
Water drain screw	•	•
Automatic socket	•	•
ECO Power	•	•
Filter cleaning technology	•	-
Heavy-duty suction hose	•	-
Suction tube	Telescopic, stainless steel	Telescopic, stainless steel
Nozzles	Combination, crevice, upholstery nozzle and drill adapter (1x each)	Combination, crevice and upholstery nozzle (1x each)
Filters	Foam, HEPA filter, dirt bag, dual filter bag (1x each)	Foam, pleated filter, dirt bag (1x each)
Ash Filter	-	-
Article number	23.424.50	23.423.80



4 006825 636789



4 006825 605372

WET AND DRY VACUUM CLEANERS

INCL.
NUMEROUS
ACCESSORIES



	TE-VC 2230 SAC EXPERT	TE-VC 2230 SA EXPERT
Mains connection	220 - 240 V ~ 50/60 Hz	230 V ~ 50 Hz
Rated input	1150 W S1	1150 W S1
Suction power	220 mbar	220 mbar
Tank volume	30 l	30 l
Suction hose length / diameter	300 cm / 36 mm	300 cm / 36 mm
Product weight	10.3 kg	10.2 kg
Cable holder	•	•
Blow connector	•	•
Accessory mount	•	•
Water drain screw	•	•
Automatic socket	•	•
ECO Power	•	•
Filter cleaning technology	•	-
Heavy-duty suction hose	•	-
Suction tube	Telescopic, stainless steel	Telescopic, stainless steel
Nozzles	Combination, crevice and upholstery nozzle (1x each)	Combination, crevice and upholstery nozzle (1x each)
Filters	Foam, pleated filter, dirt bag, dual filter bag (1x each)	Foam, pleated filter, dirt bag (1x each)
Ash Filter	-	-
Article number	23.424.40	23.423.63



4 006825 636772



4 006825 586022

WET AND DRY VACUUM CLEANERS

INCL.
NUMEROUS
ACCESSORIES



Illustration similar

Illustration similar

	TC-VC 1930 SA CLASSIC	TC-VC 1930 S CLASSIC
Mains connection	220 - 240 V ~ 50/60 Hz	220 - 240 V ~ 50 Hz
Rated input	1500 W S1	1500 W S1
Suction power	190 mbar	190 mbar
Tank volume	30 l	30 l
Suction hose length / diameter	250 cm / 36 mm	250 cm / 36 mm
Product weight	6.8 kg	5.7 kg
Cable holder	•	•
Blow connector	•	•
Accessory mount	•	•
Water drain screw	•	•
Automatic socket	•	-
ECO Power	-	-
Filter cleaning technology	-	-
Heavy-duty suction hose	-	-
Suction tube	2-piece, plastic	2-piece, plastic
Nozzles	Combination, crevice nozzle (1x each)	Combination, crevice nozzle (1x each)
Filters	Foam filter, pleated filter (1x each)	Foam filter, pleated filter (1x each)
Ash Filter	-	-
Article number	23.421.90	23.421.88



4 006825 584356



4 006825 617559

WET AND DRY VACUUM CLEANERS

INCL.
NUMEROUS
ACCESSORIES



	TE-VC 1925 SA EXPERT	TC-VC 1825 CLASSIC
Mains connection	230 V ~ 50 Hz	220 - 240 V ~ 50/60 Hz
Rated input	800 W S1	1250 W S1
Suction power	190 mbar	180 mbar
Tank volume	25 l	25 l
Suction hose length / diameter	300 cm / 36 mm	250 cm / 36 mm
Product weight	8.1 kg	5.0 kg
Cable holder	•	•
Blow connector	•	•
Accessory mount	•	•
Water drain screw	•	-
Automatic socket	•	-
ECO Power	•	-
Filter cleaning technology	-	-
Heavy-duty suction hose	-	-
Suction tube	Telescopic, stainless steel	2-piece, plastic
Nozzles	Combination, crevice and upholstery nozzle (1x each)	Combination, crevice nozzle (1x each)
Filters	Foam, pleated filter, dirt bag (1x each)	Foam, pleated filter, dirt bag (1x each)
Ash Filter	-	-
Article number	23.423.54	23.424.30



4 006825 586015



4 006825 633566

WET AND DRY VACUUM CLEANERS

INCL.
NUMEROUS
ACCESSORIES



Illustration similar



	TC-VC 1820 SA CLASSIC	TE-VC 1820 EXPERT
Mains connection	220 - 240 V ~ 50/60 Hz	230 V ~ 50 Hz
Rated input	1250 W S1	750 W S1
Suction power	180 mbar	180 mbar
Tank volume	20 l	20 l
Suction hose length / diameter	150 cm / 36 mm	250 cm / 36 mm
Product weight	4.5 kg	4.2 kg
Cable holder	•	•
Blow connector	•	•
Accessory mount	•	•
Water drain screw	-	-
Automatic socket	•	-
ECO Power	-	•
Filter cleaning technology	-	-
Heavy-duty suction hose	-	-
Suction tube	3-piece, plastic	2-piece, stainless steel
Nozzles	Combination, crevice nozzle (1x each)	Combination, crevice and upholstery nozzle (1x each)
Filters	Foam filter, filter bag, dirt bag (1x each)	Foam, pleated filter, dirt bag (1x each)
Ash Filter	-	-
Article number	23.424.25	23.423.41



4 006825 629781



4 006825 585896

WET AND DRY VACUUM CLEANERS

INCL.
NUMEROUS
ACCESSORIES



Illustration similar

	TC-VC 1820 S CLASSIC	TC-VC 1820 S Kit CLASSIC
Mains connection	220 - 240 V ~ 50/60 Hz	220 - 240 V ~ 50/60 Hz
Rated input	1250 W S1	1250 W S1
Suction power	180 mbar	180 mbar
Tank volume	20 l	20 l
Suction hose length / diameter	150 cm / 36 mm	150 cm / 36 mm
Product weight	4.5 kg	6.0 kg
Cable holder	•	•
Blow connector	•	•
Accessory mount	•	•
Water drain screw	-	-
Automatic socket	-	-
ECO Power	-	-
Filter cleaning technology	-	-
Heavy-duty suction hose	-	-
Suction tube	3-piece, plastic	3-piece, plastic
Nozzles	Combination, crevice nozzle (1x each)	Combination, crevice nozzle (1x each)
Filters	Foam filter, filter bag, dirt bag (1x each)	Foam filter, filter bag, dirt bag (1x each)
Ash Filter	-	•
Article number	23.421.67	23.421.75



4 006825 585162



4 006825 584035

WET AND DRY VACUUM CLEANERS

INCL.
NUMEROUS
ACCESSORIES



	TC-VC 1815 S CLASSIC	TC-VC 1815 CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50/60 Hz
Rated input	1250 W S1	1250 W S1
Suction power	180 mbar	180 mbar
Tank volume	15 l	15 l
Suction hose length / diameter	150 cm / 36 mm	150 cm / 36 mm
Product weight	3.6 kg	4.2 kg
Cable holder	•	•
Blow connector	•	•
Accessory mount	•	•
Water drain screw	-	-
Automatic socket	-	-
ECO Power	-	-
Filter cleaning technology	-	-
Heavy-duty suction hose	-	-
Suction tube	3-piece, plastic	3-piece, plastic
Nozzles	Combination, crevice nozzle (1x each)	Combination, crevice nozzle (1x each)
Filters	Foam filter, filter bag, dirt bag (1x each)	Foam filter, filter bag, dirt bag (1x each)
Ash Filter	-	-
Article number	23.423.90	23.402.90



WET AND DRY VACUUM CLEANERS



	TC-VC 1812 S CLASSIC
Mains connection	220 - 240 V ~ 50 Hz
Rated input	1250 W S1
Suction power	180 mbar
Tank volume	12 l
Suction hose length / diameter	150 cm / 36 mm
Product weight	3.2 kg
Cable holder	•
Blow connector	•
Accessory mount	•
Water drain screw	-
Automatic socket	-
ECO Power	-
Filter cleaning technology	-
Heavy-duty suction hose	-
Suction tube	3-piece, plastic
Nozzles	Combination, crevice nozzle (1x each)
Filters	Foam filter, filter bag, dirt bag (1x each)
Ash Filter	-
Article number	23.423.70



ASH VACUUM CLEANERS



	TC-AV 1620 DW CLASSIC	TC-AV 1618 D CLASSIC
Mains connection	220 - 240 V ~ 50/60 Hz	220 - 240 V ~ 50/60 Hz
Rated input	1250 W	1200 W
Suction power	165 mbar	160 mbar
Tank volume	20 l	18 l
Suction hose length	120 cm	100 cm
Suction hose diameter	36 mm	36 mm
Product weight	4.6 kg	3.9 kg
Carry handle	•	•
Castors	•	-
Cable rewind	•	•
Pleated filter	•	•
Additional pre-filter	•	•
Packaging	Colour box	Colour box
Article number	23.516.65	23.516.60



4 006825 640410



4 006825 640403



COMPRESSORS



SILENT AIR COMPRESSORS

SILENT

57 dB*

* sound pressure LpA



	TE-AC 24 Silent EXPERT PLUS	NEW	TE-AC 6 Silent EXPERT PLUS	NEW
Mains connection	220 - 240 V ~ 50 Hz		220 - 240 V ~ 50 Hz	
Power rating	750 W S1		550 W S1	
Suction power	135 l/min		110 l/min	
Output rate 0 bar 4 bar 7 bar	100 l/min 65 l/min 40 l/min		75 l/min 50 l/min 37 l/min	
Tank capacity	24 l		6 l	
Max. operating pressure	8 bar		8 bar	
Number of cylinders	2		2	
Noise level (LpA)	57 dB(A)		57 dB(A)	
Product weight	22.2 kg		14.7 kg	
Silent technology	•		•	
Oilfree motor	•		•	
Pressure Reducer	•		•	
Packaging	Colour box		Colour box	
Article number	40.206.10		40.206.00	



4 006825 640892



4 006825 640885

BELT-DRIVEN COMPRESSOR

SUPER AIR

+ 25% POWER

POWER 10 bar



	TE-AC 400/90/10 EXPERT	NEW
Mains connection	220 - 240 V ~ 50 Hz	
Power rating	3000 W S1	
Suction power	400 l/min	
Output rate 0 bar 4 bar 7 bar	230 l/min 210 l/min 200 l/min	
Tank capacity	90 l	
Max. operating pressure	10 bar	
Number of cylinders	2	
Noise level (LwA)	94 dB(A)	
Product weight	67.0 kg	
Belt drive	•	
Pressure Reducer	•	
Packaging	Colour box	
Article number	40.108.00	



4 006825 642339

OIL-LUBRICATED COMPRESSORS



	TC-AC 420/50/10 V CLASSIC	TE-AC 400/50/10 V EXPERT	TE-AC 270/50/10 EXPERT
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Power rating	2200 W S1	2200 W S1	1800 W S1
Suction power	420 l/min	400 l/min	270 l/min
Output rate 0 bar 4 bar 7 bar	245 l/min 200 l/min 150 l/min	270 l/min 210 l/min 155 l/min	140 l/min 127 l/min 100 l/min
Tank capacity	50 l	50 l	50 l
Max. operating pressure	10 bar	10 bar	10 bar
Number of cylinders	2	2	1
Noise level (LwA)	97 dB(A)	96 dB(A)	94 dB(A)
Product weight	41.8 kg	42.2 kg	33.5 kg
Pressure Reducer	•	•	•
Packaging	Colour box	Colour box	Colour box
Article number	40.104.95	40.104.72	40.104.40



4 006825 638264



4 006825 622720



4 006825 594447

OIL-LUBRICATED COMPRESSORS



	TE-AC 270/24/10 EXPERT	TE-AC 230/24/8 EXPERT	TC-AC 190/24/8 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Power rating	1800 W S1	1500 W S1	1500 W S2 15 min
Suction power	270 l/min	230 l/min	165 l/min
Output rate 0 bar 4 bar 7 bar	140 l/min 127 l/min 100 l/min	132 l/min 102 l/min 83 l/min	110 l/min 75 l/min 55 l/min
Tank capacity	24 l	24 l	24 l
Max. operating pressure	10 bar	8 bar	8 bar
Number of cylinders	1	1	1
Noise level (LwA)	94 dB(A)	94 dB(A)	97 dB(A)
Product weight	27.0 kg	23.0 kg	20.8 kg
Pressure Reducer	•	•	•
Packaging	Colour box	Colour box	Colour box
Article number	40.104.50	40.104.60	40.073.25



4 006825 594461



4 006825 594478



4 006825 610635

OIL-FREE COMPRESSORS



	TC-AC 240/50/10 OF CLASSIC	TC-AC 200/30/8 OF CLASSIC	TC-AC 200/24/8 OF CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Power rating	1500 W S3 25%	1100 W S3 25%	1200 W S1
Suction power	240 l/min	200 l/min	180 l/min
Output rate 0 bar 4 bar 7 bar	173 l/min 107 l/min 76 l/min	165 l/min 83 l/min 60 l/min	110 l/min 70 l/min 45 l/min
Tank capacity	50 l	30 l	24 l
Max. operating pressure	10 bar	8 bar	8 bar
Number of cylinders	1	1	1
Noise level (LwA)	97 dB(A)	97 dB(A)	97 dB(A)
Product weight	22.2 kg	18.1 kg	15.4 kg
Cable storage	-	-	-
Pressure Reducer	•	•	•
Compressed air hose	-	-	-
Blow-out pistol	-	-	-
Tire pressure gauge	-	-	-
Adapter set	-	-	-
Packaging	Colour box	Colour box	Colour box
Article number	40.103.93	40.103.94	40.205.90



4 006825 597295



4 006825 597288



4 006825 640496

OIL-FREE COMPRESSORS



	TC-AC 190/6/8 OF Set CLASSIC	TC-AC 190/6/8 OF CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Power rating	1200 W S1	1100 W S3 25%
Suction power	190 l/min	185 l/min
Output rate 0 bar 4 bar 7 bar	130 l/min 77 l/min 55 l/min	139 l/min 77 l/min 60 l/min
Tank capacity	6 l	6 l
Max. operating pressure	8 bar	8 bar
Number of cylinders	1	1
Noise level (LwA)	97 dB(A)	97 dB(A)
Product weight	9.2 kg	9.1 kg
Cable storage	•	•
Pressure Reducer	•	•
Compressed air hose	•	-
Blow-out pistol	•	-
Tire pressure gauge	•	-
Adapter set	•	-
Packaging	Colour box	Colour box
Article number	40.206.50	40.204.95



4 006825 641578



4 006825 592184

OIL-FREE COMPRESSORS



	TC-AC 190/8 OF Set CLASSIC	TC-AC 190 OF Set CLASSIC NEW	TC-AC 180/8 OF CLASSIC NEW
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz
Power rating	1100 W S3 15%	1100 W S3 15%	1100 W S3 15%
Suction power	190 l/min	190 l/min	180 l/min
Output rate 0 bar 4 bar 7 bar	165 l/min 83 l/min 55 l/min without pressure chamber	165 l/min 83 l/min 55 l/min without pressure chamber	95 l/min 36 l/min 10 l/min without pressure chamber
Tank capacity	8 bar	8 bar	8 bar
Max. operating pressure	1	1	1
Number of cylinders	97 dB(A)	97 dB(A)	96 dB(A)
Noise level (LwA)	5.2 kg	5.3 kg	5.0 kg
Product weight			
Cable storage	•	•	•
Pressure Reducer	-	-	-
Compressed air hose	•	•	•
Blow-out pistol	•	•	•
Tire pressure gauge	•	•	•
Adapter set	•	•	•
Packaging	Colour box	Colour box	Colour box
Article number	40.205.36	40.206.60	40.104.86



4 006825 597257



4 006825 642346



4 006825 641936

AIRTOOLS

	Blow-out Pistol, long	Blow-out Pistol, short
Items supplied	1 pc	1 pc
Working pressure	2 - 8 bar	2 - 8 bar
Packaging	Colour box	Colour box
Article number	41.331.02	41.331.00



	Tire Pressure Gauge, digital	Pro Tire Pressure Gauge	Tire Pressure Gauge
Items supplied	1 pc	1 pc	1 pc
Working pressure	0 - 13 bar	0 - 8 bar	0 - 8 bar
Packaging	Colour box	Colour box	Colour box
Article number	41.331.15	41.331.10	41.370.00



	Pro Paint Spray Gun	Paint Spray Gun	Paint Spray Gun
Items supplied	1 pc	1 pc	1 pc
Technology	Cup	Cup	Suction-feed can
Working pressure	3 - 3.5 bar	3 - 4 bar	3 - 4 bar
Packaging	Colour box	Colour box	Colour box
Article number	41.330.30	41.330.00	41.329.00



	Spray Gun	Jet gun	Suction Spray Gun NEW	Underseal Gun pistole
Items supplied	1 pc	1 pc	1 pc	1 pc
Technology	Suction-feed can	Suction-feed can	-	-
Working pressure	3 - 8 bar	3 - 8 bar	6 - 7 bar	3 - 8 bar
Packaging	Colour box	Colour box	Colour box	Colour box
Article number	41.332.00	41.333.00	41.334.20	41.335.01



AIRTOOLS



	Air Tool Set	Pro Compressed Air Kit	Compressed Air Kit
Items supplied	10-piece	5-piece	3-piece
Packaging	Colour box	Colour box	Colour box
Article number	40.205.65	41.327.20	41.327.41



	TC-PN 50 CLASSIC	TC-PW 610 CLASSIC	TC-PW 340 CLASSIC	TC-PP 220 CLASSIC
Tool type	Stapler/nailer	Impact wrench	Impact wrench	Straight grinder
Items supplied	1 pc	1 pc	1 pc	1 pc
Working pressure	max. 8.3 bar	max. 6.3 bar	max. 6.3 bar	max. 6.3 bar
Torque	–	610 Nm	340 Nm	–
Accessories	3x 500 staples, 2x 1000 nails	10 drill sockets, 1x extension	8 drill sockets	10 grinding stones
Packaging	Case	Case	Case	Case
Article number	41.377.90	41.389.60	41.389.50	41.385.40



	TC-PC 45 CLASSIC	TC-PC 45 Set CLASSIC	TC-PR 68 CLASSIC	TC-PE 150 CLASSIC
Tool type	Hammer	Hammer	Ratchet screwdriver	Rotating sander
Items supplied	1 pc	1 pc	1 pc	1 pc
Working pressure	max. 6.3 bar	max. 6.3 bar	max. 6.3 bar	max. 6.3 bar
Torque	–	–	68 Nm	–
Accessories	4-piece chisel set	4-piece chisel set, 1 needle scaler attachment	7 socket wrenches, 1 extension, 1 cardan joint	6 abrasive papers (2x P80, 2x P100, 2x P120)
Packaging	Case	Case	Case	Colour box
Article number	41.390.40	41.390.45	41.391.80	41.333.30





STONE CUTTING MACHINES



	TE-SC 920 L EXPERT	TE-SC 570 L EXPERT
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	2200 W S2 20 min	1500 W S2 20 min
Speed	3000 min ⁻¹	3000 min ⁻¹
Cutting height 90° 45°	70 mm 55 mm	60 mm 48 mm
Cutting length	920 mm	570 mm
Cutting wheel	Ø 300 x Ø 25.4 mm	Ø 250 x Ø 25.4 mm
Mitre cut	0° to 45° to the left	0° to 45° to the left
Product weight	53.5 kg	42.6 kg
Water bath container	•	•
Laser	•	•
Article number	43.014.32	43.014.44



4 006825 541199



4 006825 541243



TILE CUTTING MACHINES



	TE-TC 920 UL EXPERT	TE-TC 620 U EXPERT
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	900 W S2 30 min	900 W S2 30 min
Speed	2950 min ⁻¹	2950 min ⁻¹
Cutting height 90° 45°	36 mm 29 mm	30 mm 25 mm
Cutting length	920 mm	620 mm
Cutting wheel	Ø 200 x Ø 25.4 mm	Ø 200 x Ø 25.4 mm
Mitre cut	0° to 45° to the left	0° to 45° to the left
Product weight	42.7 kg	34.4 kg
Water bath container	•	•
Laser	•	-
Transport wheels	•	•
Parallel stop	•	•
Angle stop	•	•
Article number	43.012.20	43.012.95



TILE CUTTING MACHINES



	TC-TC 800 CLASSIC	TC-TC 618 CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	800 W S2 10 min	600 W S2 10 min
Speed	2950 min ⁻¹	3000 min ⁻¹
Cutting height 90° 45°	34 mm 14 mm	35 mm 22 mm
Cutting length	-	-
Cutting wheel	Ø 180 x Ø 25.4 mm	Ø 180 x Ø 25.4 mm
Mitre cut	0° to 45° to the left	0° to 45° to the left
Product weight	8.6 kg	7.4 kg
Water bath container	•	•
Laser	-	-
Transport wheels	-	-
Parallel stop	•	•
Angle stop	•	-
Article number	43.011.85	43.011.80



BENCH DRILLS

VARIO-MATIC

The special gearing enables the speeds to be adjusted easily without elaborate conversion of the mechanical system

LCD DISPLAY

The precise current speed is shown clearly in the display

HIGH SAFETY STANDARDS

Maximum user safety is ensured by the Emergency Stop switch and the microswitch in the swivelable chip guard

MK2 CHUCK

The MK2 mount enables even larger bits to be used

QUICK-CHANGE DRILL CHUCK

The quality drill chuck enables the bits to be changed over quickly and holds 1 - 16 mm bits securely

TABLE WITH WIDTH EXTENSION

The work table with allround coolant grooves can be adjusted to any position and has a pullout roll base for longer workpieces

DEPTH STOP

Easy to adjust depth stop for exact (series) drilling

INDUCTION MOTOR

Smooth-running, high-torque and long-lasting induction motor

CAPSTAN

Large capstan with user-friendly handles for perfect power and feed control

LED LIGHT

For illuminating the area to be drilled if needed, to make it easier to work with



BENCH DRILLS



	TE-BD 750 E <i>EXPERT</i>	TC-BD 630 <i>CLASSIC</i>	TC-BD 350 <i>CLASSIC</i>
Mains connection	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	750 W S2 15 min	630 W S2 15 min	350 W S2 15 min
Speed	450 - 2500 min ⁻¹	220 - 2450 min ⁻¹	580 - 2650 min ⁻¹
Number of speed steps	Continuously	12 settings	5 settings
Max. drilling depth	80 mm	60 mm	50 mm
Reach	152 mm	126 mm	104 mm
Drill diameter	1 - 16 mm	1.5 - 16 mm	1.5 - 13 mm
Drill table tiltable	-45° to +45°	-45° to +45°	-45° to +45°
Drill table size / base dimensions	243 x 243 mm / 304 x 465 mm	200 x 195 mm / 230 x 350 mm	160 x 160 mm / 85 x 290 mm
Machine height	960 mm	860 mm	590 mm
Product weight	44.4 kg	32.6 kg	13.7 kg
LED light	•	-	-
LCD speedometer	•	-	-
Quick-action chuck	•	-	-
Table extension	•	-	-
Drill chuck mount	B16	B16	B16
MK2 chuck	•	•	-
Machine vice	-	•	-
Article number	42.507.15	42.505.95	42.506.70



4 006825 617771



4 006825 633535



4 006825 627916



BENCH GRINDERS



	TC-BG 200 CLASSIC	TC-BG 175 CLASSIC	TC-WD 150/200 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	400 W S2 30 min	400 W S2 30 min	250 W S2 30 min
Speed	2950 min ⁻¹	2950 min ⁻¹	2950 min ⁻¹ 134 min ⁻¹
Wheel diameter	200 mm	175 mm	150 mm 200 mm
Internal diameter of wheel	32 mm	32 mm	12.7 mm 20 mm
Wheel thickness	25 mm	25 mm	20 mm 40 mm
Product weight	12.0 kg	10.9 kg	10.0 kg
Adjustable speed	–	–	–
Flexible shaft	–	–	–
Accessories Set	–	–	–
Article number	44.128.20	44.126.30	44.172.40



4 006825 601695



4 006825 601701



4 006825 601688

BENCH GRINDERS



	TH-BG 150 CLASSIC	TH-XG 75 Kit CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	150 W S2 30 min	120 W
Speed	2950 min ⁻¹	0 - 9900 min ⁻¹
Wheel diameter	150 mm	75 mm
Internal diameter of wheel	12.7 mm	10 mm
Wheel thickness	16 mm	20 mm
Product weight	5.4 kg	2.7 kg
Adjustable speed	–	•
Flexible shaft	–	•
Accessories Set	–	•
Article number	44.125.70	44.125.60



4 006825 595765



4 006825 595697

STATIONARY GRINDERS



	TH-US 240 CLASSIC	TC-US 400 CLASSIC
Mains connection	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	240 W S2 30 min	375 W S2 30 min
Speed	2950 min ⁻¹	1450 min ⁻¹
Belt speed	900 m/min	276 m/min
Grinding wheel	Ø 150 x Ø 12.7 x 20 mm	Ø 150 mm
Sanding/grinding belt	50 x 686 mm	100 x 915 mm
Swivelling range	-	-60° to 60°
Product weight	7.3 kg	10.7 kg
Ball bearing mounted shaft	•	-
Spark protection glass	•	-
Rubber feet for low vibration	•	•
Adjustable work support	•	•
Dust extraction	-	•
Tilting aluminium table	-	•
Cross stop	-	•
Sanding/grinding belt	•	•
Grinding wheel	•	-
Sanding/grinding disc	-	•
Article number	44.661.50	44.192.55



4 006825 595789



4 006825 601930

METAL CUTTING SAW




	TC-MC 355 CLASSIC
Mains connection	220 - 240 V ~ 50 Hz
Rated input	2300 W
Cutting wheel	Ø 355 x Ø 25.4 x 3.2 mm
Speed	4000 min ⁻¹
Mitre cut	-15° to +45°
Max. saw width at 90°, rectangular profile	100 x 100 mm
Max. saw width at 90°, round profile	Ø 100 mm
Max. clamping range	230 mm
Bench size	460 x 260 mm
Product weight	16.4 kg
Soft start-up	•
Article number	45.031.35



4 006825 619966

ELECTRIC HOISTS

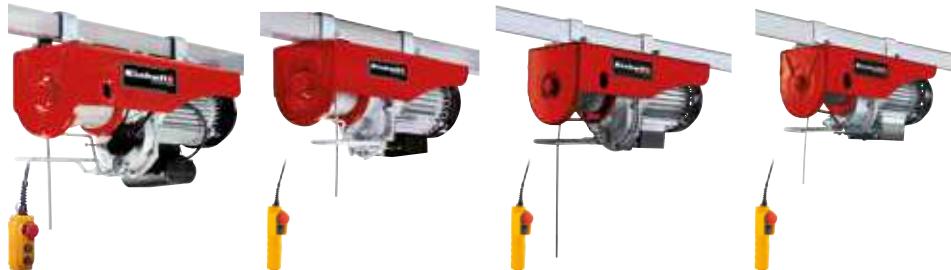

	TC-EH 1000 CLASSIC	TC-EH 600 CLASSIC	TC-EH 500 CLASSIC	TC-EH 250 CLASSIC
Mains connection	220 - 240 V ~ 50 Hz	220 - 240 V ~ 50 Hz	230 V ~ 50 Hz	230 V ~ 50 Hz
Rated input	1600 W S3 25%	1050 W S3 20%	1000 W S3 20%	500 W S3 20%
Lifting height without return pulley	18 m	18 m	11.5 m	11.5 m
Lifting height with return pulley	9 m	9 m	5.7 m	5.7 m
Payload without return pulley	500 kg	300 kg	250 kg	125 kg
Payload with return pulley	999 kg	600 kg	500 kg	250 kg
Hoisting speed without return pulley	8 m/min	8 m/min	8 m/min	8 m/min
Hoisting speed with return pulley	4 m/min	4 m/min	4 m/min	4 m/min
Product weight	32.0 kg	16.8 kg	15.6 kg	10.0 kg
Thermo switch	•	•	•	•
Automatic brake	•	•	•	•
Automatic limit cut-out	•	•	•	•
Twist-free wire cable	•	•	•	•
Operator switch with emergency stop function	•	•	•	•
Guide roller with load hook	•	•	•	•
Double clamps for mounting	•	•	•	•
Article number	22.551.60	22.551.50	22.551.40	22.551.30



4 006825 627602



4 006825 628753



4 006825 627213



4 006825 627183

CHAIN HOIST



HOIST LEVER ARM



	TC-CH 1000 CLASSIC
Max payload	1000 kg
Max. lifting height	2.5 m
Product weight	8.5 kg
Load hook with safety catch	•
Closed metal housing	•
Article number	22.501.10



4 006825 628302

	SA 1100
Reach	75 - 110 cm
Maximum load at 75 cm	600 kg
Maximum load at 110 cm	300 kg
Swivelling range	180°
Product weight	8.3 kg
Article number	22.553.98



4 006825 540017

HAND LEVER HOISTS



	TC-LW 2000 CLASSIC	TC-LW 1000 CLASSIC
Max. payload with guide roller	2000 kg	1000 kg
Steel cable length	3.3 m	2.2 m
Steel cable diameter	6.0 mm	4.8 mm
Max. useable distance	1.6 m	1.2 m
Product weight	5.2 kg	2.8 kg
Automatic brake	•	•
Load hook with safety catch	•	•
Cable safety clamp	•	•
Twist-free wire cable	•	•
Article number	22.601.50	22.601.40



4 006825 643244



4 006825 643237

HAND ROPE WINCHES



	TC-WI 800 CLASSIC	TC-WI 500 CLASSIC
Max. pulling force	800 kg	500 kg
Steel cable length	20 m	10 m
Steel cable diameter	4.8 mm	4.2 mm
Product weight	4.7 kg	2.5 kg
Automatic brake	•	•
Load hook with safety catch	•	•
Cable safety clamp	•	•
Twist-free wire cable	•	•
Return stop	•	-
Article number	22.601.70	22.601.60



4 006825 643916



4 006825 643909

PALLET TRUCK



	TC-PT 2500 CLASSIC
Max. load capacity	2500 kg
Fork height	80 mm - 190 mm
Diameter of load-bearing rollers	80 mm
Diameter of steering wheels	180 mm
Fork length	1150 mm
Fork width	540 mm
Product weight	62.0 kg
Safety handle with integral selector lever	•
Automatic return of the drawbar	•
Article number	20.225.30



4 006825 615654

TOOL AND GEAR WAGGONS



	TC-TW 150 CLASSIC	NEW	TC-TW 100 CLASSIC
Max. load capacity	150 kg		75 kg
Width	685 mm		616 mm
Height	875 mm		658 mm
Depth	455 mm		330 mm
Drawer 1	4x 50 mm		4x 70 mm
Drawer 2	2x 100 mm		1x 240 mm
Drawer 3	1x 205 mm		-
Product weight	52.5 kg		18.7 kg
Article number	45.101.51		45.101.70



4 006825 640960



4 006825 614305

POWER GENERATORS (PETROL)



	TC-PG 55/E5 CLASSIC	TC-PG 35/E5 CLASSIC
Power rating at 400 V	5500 W (2 min) 3600 W (S1)	–
Power rating at 230 V	3300 W (2 min) 3000 W (S1)	3100 W (2 min) 2600 W (S1)
Max. engine power	7500 W	4100 W
Speed	3000 min ⁻¹	3000 min ⁻¹
Engine displacement	389 cm ³	208 cm ³
Fuel tank capacity	25 l	15 l
Running time two-thirds load	11.7 h	10.7 h
Product weight	82.8 kg	42.1 kg
Tank with level indicator	•	•
Voltmeter	–	•
Automatic voltage regulation (AVR)	•	•
Overload switch	•	•
Low oil stop	•	–
Electric start-up	•	–
Type of generator	Synchronous	Synchronous
Number of sockets	2x 230 V, 1x 400 V	2x 230 V
Motor	Four-stroke, air cooled	Four-stroke, air cooled
Article number	41.525.62	41.525.51

4 006825 644159

4 006825 644142

POWER GENERATORS (PETROL)



	TC-PG 25/E5 CLASSIC	TC-PG 10/E5 CLASSIC
Power rating at 400 V	–	–
Power rating at 230 V	2400 W (2 min) 2100 W (S1)	800 W (1 min) 680 W (S1)
Max. engine power	4150 W	1200 W
Speed	3000 min ⁻¹	3000 min ⁻¹
Engine displacement	212 cm ³	63 cm ³
Fuel tank capacity	15 l	4 l
Running time two-thirds load	12.5 h	6.6 h
Product weight	38.8 kg	18.8 kg
Tank with level indicator	•	–
Voltmeter	•	–
Automatic voltage regulation (AVR)	•	•
Overload switch	•	•
Low oil stop	•	–
Electric start-up	–	–
Type of generator	Synchronous	Synchronous
Number of sockets	2x 230 V	1x 230 V
Motor	Four-stroke, air cooled	Two-stroke, air cooled
Article number	41.525.41	41.525.35

4 006825 644135

4 006825 648027



ACCESSORIES



ACCESSORIES FOR DRILLING AND SCREWDRIVING

CORDLESS DRILLS ACCESSORIES



	Drill and Bit Set	Drill and Bit Set	Drill and Bit Set
Items supplied	24-piece	39-piece	39-piece
Drill bits	•	•	•
Metal drills	•	•	•
Wood drills	-	-	•
Masonry drills	-	-	•
Packaging	Storage box	Storage box	Storage box
Article number	49108806	49108911	49108956



CORDLESS DRILLS ACCESSORIES



	Bit Set	NEW	Set of Drill Bit Cassettes	NEW
Items supplied	34-piece		15-piece: 3 drill bit cassettes with 5 bits in each	
Drill bits	•		-	
Metal drills	-		•	
Wood drills	-		•	
Masonry drills	-		•	
Packaging	Storage box		Drill bit cassettes	
Article number	49108801		49109157	



IMPACT DRIVERS ACCESSORIES



	Impact Bit Set
Items supplied	12-piece
Packaging	Patented bit box
Application	Specially for use with impact drivers
Set comprising	10 bits, bit holder, handle
Article number	49155025



ROTARY HAMMERS ACCESSORIES



Items supplied	SDS-plus Drill Bits / Chisels Set
Drill chuck	10 hammer drill bits, 2 chisels
Length	SDS-plus
Drill diameter	110 - 260 mm
Chisels	5 - 16 mm
Packaging	1x flat 20 mm, 1x pointed
Article number	Plastic case

SDS-plus Drill Bits / Chisels Set	
Items supplied	10 hammer drill bits, 2 chisels
Drill chuck	SDS-plus
Length	110 - 260 mm
Drill diameter	5 - 16 mm
Chisels	–
Packaging	Plastic case
Article number	49240295

SDS-plus Drill Bits Set	
Items supplied	12 hammer drill bits
Drill chuck	SDS-plus
Length	110 - 260 mm
Drill diameter	5 - 14 mm
Chisels	–
Packaging	Plastic case
Article number	49240281

NEW



ROTARY HAMMERS ACCESSORIES



Items supplied	SDS-max Drill Bits / Chisels Set
Drill chuck	3 hammer drill bits, 2 chisels
Length	SDS-max
Drill diameter	400 mm
Chisels	18, 20, 25 mm
Packaging	1x flat 25 mm, 1x pointed
Article number	Plastic case

SDS-max Drill Bits / Chisels Set	
Items supplied	3 hammer drill bits, 2 chisels
Drill chuck	SDS-max
Length	400 mm
Drill diameter	18, 20, 25 mm
Chisels	1x flat 25 mm, 1x pointed
Packaging	Plastic case
Article number	49194005

SDS-max Chisels Set	
Items supplied	3 chisels
Drill chuck	SDS-max
Length	400 mm
Drill diameter	–
Chisels	2x flat (25 / 40 mm), 1x pointed
Packaging	Storage tube
Article number	49190103



ROTARY HAMMERS ACCESSORIES

	Designation	Art. No.	EAN	Items supplied	Drill chuck	Length	Packaging
	Chisel	49191045	4009311910455	1 flat chisel	SDS-hex	410 mm	Plastic tube
	Chisel	49191145	4009311911452	1 pointed chisel	SDS-hex	410 mm	Plastic tube



PAINT/MORTAR MIXERS

	Designation	Art. No.	EAN	Items supplied	Length	Ø	Menge max.	Mixer mount	Can be used for
	Mixers	49497695	4009314976953	2 mixers	585 mm	120 / 135 mm	80 l	M14	Bitumen, epoxy, glue/plaster, mortar
	Mixer	49497615	4009314976151	1 mixer	600 mm	90 mm	60 l	Hex 8 mm	Mortar, plaster
	Mixer	49497625	4009314976250	1 mixer	600 mm	120 mm	80 l	M14	Mortar, plaster
	Mixer	49497215	4009314972153	1 mixer	400 mm	80 mm	40 l	Hex 8 mm	Paint
	Mixer	49497635	4009314976359	1 mixer	600 mm	120 mm	80 l	M14	Paint
	Mixer	49497005	4009314970050	1 mixer	400 mm	80 mm	40 l	Hex 8 mm	Lacquer
	Mixers	49497795	4009314977950	2 mixers	550 mm	120 mm	140 l	Hex mount	Mortar, plaster

ANGLE GRINDERS ACCESSORIES

kwb ANGLE GRINDERS ACCESSORIES									
	Designation	Art. No.	EAN	Scope of delivery	Ø	Ø hole	Grit size	Number of strips	Can be used for
	Sanding Mop/ Sanding Plate Set	49795505	4 009317 955054	2-piece	115 mm	22 mm	40 / 80 (1 of each)	62 each	Metalworking and woodworking
	Sanding Mop/ Sanding Plate Set	49795705	4 009317 957058	2-piece	125 mm	22 mm	40 / 80 (1 of each)	62 each	Metalworking and woodworking
	Sanding Mop/ Sanding Plate Set	49795805	4 009317 958055	2-piece	150 mm	22 mm	40 / 80 (1 of each)	76 each	Metalworking and woodworking

kwb ANGLE GRINDERS ACCESSORIES								
	Designation	Art. No.	EAN	Scope of delivery	Ø	Ø hole	Thickness	Can be used for
	Diamond Cutting Wheel Set	49797605	4 009317 976059	1 turbo, 1 segmented cutting wheel	230 mm	22 mm	2.6 / 3.3 mm	Bricks, concrete blocks, engineering bricks, tiles
	Thin Cutting Wheel Set NEW	49711949	4 009317 119494	5 pcs	230 mm	22 mm	2.0 mm	Metal and stainless steel
	Thin Cutting Wheel Set NEW	49711946	4 009317 119463	5 pcs	150 mm	22 mm	1.4 mm	Metal and stainless steel
	Diamond Thin Cutting Wheel NEW	49721550	4 009317 215509	1 pc	150 mm	22 mm	1.6 mm	Stone, concrete, tiles, ceramic, fired stoneware, marble, granite
	Thin Cutting Wheel Set	49711945	4 009317 119456	10 pcs	125 mm	22 mm	1.0 mm	Metal and stainless steel
	Diamond Thin Cutting Wheel	49724550	4 009317 245506	1 pc	125 mm	22 mm	1.2 mm	Stone, concrete, tiles, ceramic, fired stoneware, marble, granite
	Thin Cutting Wheel Set	49711944	4 009317 119449	10 pcs	115 mm	22 mm	1.0 mm	Metal and stainless steel
	Diamond Thin Cutting Wheel	49721150	4 009317 211501	1 pc	115 mm	22 mm	1.2 mm	Stone, concrete, tiles, ceramic, fired stoneware, marble, granite

ANGLE GRINDERS ACCESSORIES					
	Designation	Art. No.	EAN	Scope of delivery	For angle grinders with wheels Ø
	TS 115/125 Cutting Stand	44.310.44	4 006825 632736	1 cutting stand	115 / 125 mm
	TS 230/1 Cutting Stand	44.310.51	4 006825 632743	1 cutting stand	230 mm

ACCESSORIES FOR MILLING AND PLANING

kwb BISCUIT JOINTER ACCESSORIES							
	Designation	Art. No.	EAN	Ø	Ø hole	Cutting width	Number of teeth
	TCT Cutter Blade	49758941	4 009317 589419	100 mm	22 mm	3.8 mm	6
kwb ROUTERS ACCESSORIES							
	Designation	Art. No.	EAN	Scope of delivery	Ø shaft	Packaging	
	Gang Cutter Set	49757291	4 009317 572916	15 cutters	8 mm	Wooden case	
kwb PLANERS ACCESSORIES							
	Designation	Art. No.	EAN	Scope of delivery	Length	Material	
	Blades Set	49568315	4 009315 683157	2 reversible blades	82 mm	Hard metal	

SAWING ACCESSORIES

kwb JIGSAWS ACCESSORIES					
	Designation	Art. No.	EAN	Set comprising	Packaging
	Jigsaw Blades Set	49617350	4 009315 761053	6x saw blades for hardwood and softwood (fine/medium/rough - 2 of each), 1x saw blade wood down cut for laminate/wooden boards/plastics, 2x saw blades for metal/aluminium/plastics/wood with metal remains	Plastic cassette
kwb JIGSAWS ACCESSORIES					
	Designation	Art. No.	EAN	Can be used for	Items supplied
	Jigsaw Blades Set 4-piece Akku Top	49625427	4 009316 254271	universal use	2x saw blades wood down cut for laminate/wooden boards/plastics 1x saw blade for softwood and hardwood 1x saw blade for metal/aluminium/plastics/wood with metal remains

kwb CIRCULAR SAWS ACCESSORIES								
	Designation	Art. No.	EAN	Ø	Cutting width / blade thickness	Ø hole	Number of teeth	Saw blade type
	TCT Saw Blade for woodworking	49583359	4 009315 833590	150 mm	1.6 mm / 1.0 mm	16 mm	20	carbide tipped
	TCT Saw Blade for woodworking	49584759	4 009315 847597	165 mm	1.6 mm / 1.0 mm	20 mm	24	carbide tipped
	TCT Saw Blade for woodworking	49586956	4 009315 869568	190 mm	2.0 mm / 1.4 mm	30 mm	30	carbide tipped



MINI CIRCULAR SAWS ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Ø	Ø hole	Number of teeth	Rim shape Diamond Cutting Wheel
	Saw Bades Set	49575915	4 009315 759159	1 diamond cutting wheel, 1 HSS saw blades, 1 TCT saw blade	89 mm	10 mm	74 (HSS) / 36 (HM)	Continuous rim

CIRCULAR SAWS ACCESSORIES

	Designation	Art. No.	EAN	Can be used for	Set	Length (total)	Packaging
	Guide Bar Aluminium 2x 1000 mm	45.021.18	4 006825 632675	TE-PS 165 TC-CS 165 TC-CS 190 TE-CS 165 TE-CS 190/1 TC-CS 18/150 TE-CS 18/165-1 Li TE-CS 18/190 Li BL	2-piece	2000 mm	Colour box



ALL PURPOSE SAWS ACCESSORIES

	Designation	Art. No.	EAN	Set comprising
	Saw Blades Set 3-piece Akku Top	49576105	4 009315 761053	saw blades (1 of each) for wood (fine cut), wood (rough cut), metal/plastics/wood with metal remains/bi-metal

MULTIFUNCTIONAL TOOLS ACCESSORIES



Items supplied	Starter Kit	Floor Installation Kit	Tile Kit
Scrapers	17-piece	4-piece	4-piece
Plunge-cut blades	2x wood/plastic, 1x metal	2x wood/plastic	–
Segment saw blade	1x wood/metal/plastic	1x wood/metal/plastic	1x tile joints/lime sand brick/aerated concrete
Grater	–	–	1x mortar / tile adhesive / carpet scraps
Hook-and-loop disc	1x 93 mm	–	–
Abrasive paper (wood, metal, plastic)	40 grit, 80 grit, 120 grit (4 of each)	–	–
Silicone joint scraper	–	–	1x 28 x 50 mm
Silicone joint smoothing trowel	–	–	for narrow and wide silicone joints
Article number	49708950	49708850	49709750



GRINDING AND ENGRAVING TOOLS ACCESSORIES

Designation	Art. No.	EAN	Scope of delivery	Can be used for	Packaging
Accessories Set NEW	49510950	4 009315 109503	58-piece	grinding and engraving tools	Storage case
Accessories Set NEW	49510951	4 009315 109510	30-piece	bench grinders	Storage case

SANDING/GRINDING ACCESSORIES



ORBITAL SANDERS ACCESSORIES

	Designation	Art. No.	EAN	Dimensions	Scope of delivery	Grit size	With holes	Can be used for
	Abrasive Papers Set NEW	49817985	4 009318 179855	187 x 93 mm	15 pcs	60 / 120 / 180 (5 of each)	•	wood and metal
	Abrasive Papers Set	49818975	4 009318 189755	230 x 115 mm	15 pcs	40 / 80 / 120 (5 of each)	•	wood and metal



BELT SANDERS ACCESSORIES

	Designation	Art. No.	EAN	Dimensions	Scope of delivery	Grit size	Can be used for
	Grinding Belt Set NEW	49912575	4 009319 125752	75 x 533 mm	5 pcs	2x 40 grit, 2x 80 grit, 1 x 120 grit	wood and metal



DELTA SANDERS ACCESSORIES

	Designation	Art. No.	EAN	Dimensions	Scope of delivery	Grit size	With holes	Can be used for
	Abrasive Papers Set NEW	49492874	4 009314 928747	93 x 93 x 93 mm	20 pcs	8x 60 grit, 6x 120 grit, 6 x 180 grit	•	wood and metal



MULTI SANDERS ACCESSORIES

	Designation	Art. No.	EAN	Dimensions	Scope of delivery	Grit size	With holes	Can be used for
	Abrasive Papers Set NEW	49496174	4 009314 961744	150 x 150 x 100 mm	15 pcs	60 / 120 / 180 (5 of each)	•	wood and metal



ROTATING SANDERS ACCESSORIES

	Designation	Art. No.	EAN	Dimensions	Scope of delivery	Grit size	With holes	Can be used for
	Abrasive Papers Set NEW	49491974	4 009314 919745	125 mm	25 pcs	9x 60 grit, 8x 120 grit, 8x 180 grit	•	wood and metal



WALL PROCESSING SYSTEMS ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Ø	Abrasive mesh, universal	Corundum grinding/sanding wheel, white	Corundum grinding/sanding wheel, red
	Abrasive Mesh / Grinding/Sanding Wheel Set	49490905	4 009314 909050	5-piece	180 mm	3x 80 grit, 2x 120 grit for filling compound/paint/acrylic lacquer/synthetic resin/rust	–	–
	Abrasive Set	49490965	4 009314 909654	15-piece	180 mm	4x 80 grit, 2x 120 grit for filling compound/acrylic lacquer	4x 80 grit, 2x 120 grit for lacquer/hardwood/softwood	2x 80 grit, 1x 120 grit for wood/metal/plastics



WALL PROCESSING SYSTEMS ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Application	Ø	Segment height
	Grinding Brush	49490985	4 009314 909852	1 pc	Derusting and cleaning metal and wood	180 mm	–
	Diamond Sanding Plate	49726855	4 009317 268550	1 pc	Cleaning concrete, screed, mortar, natural stone	180 mm	6 mm



DRYWALL POLISHERS ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Ø	Abrasive mesh, universal	Corundum grinding/sanding wheel, white	Corundum grinding/sanding wheel, red
	Abrasive Mesh / Grinding/Sanding Wheel Set	49491006	4 009314 910063	5-piece	225 mm	3x 80 grit, 2x 120 grit	–	–
	Abrasive Paper Set	49491066	4 009314 910667	15-piece	225 mm	4x 80 grit, 2x 120 grit for filling compound/acrylic lacquer	4x 80 grit, 2x 120 grit for lacquer/hardwood/softwood	2x 80 grit, 1x 120 grit for wood/metal/plastics



DRYWALL POLISHERS ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Set comprising
	Abrasive Mesh / Grinding/Sanding Set	49491005	4 009314 910056	5-piece	3x abrasive mesh, universal, Ø 225 mm (2x 80 grit, 1x 120 grit) for filling compound/acrylic lacquer, 2x delta abrasive mesh 287 x 287 x 287 mm (2x 80 grit)
	Abrasive Paper Set	49491065	4 009314 910650	15-piece	4x abrasive mesh, universal, Ø 225 mm (3x 80 grit, 1x 120 grit) for filling compound/acrylic lacquer, 2x delta abrasive mesh, 287 x 287 x 287 mm (2x 80 grit), 5x grinding/sanding wheels, Ø 225 (4x 80 grit, 1x 120 grit), 2x delta abrasive paper, 287 x 287 x 287 mm (80 grit) for lacquer/plastics, 1x corundum grinding/sanding wheel, red, Ø 225 mm (80 grit), 1x corundum delta abrasive paper, red, 287 x 287 x 287 mm (80 grit)

OTHER ACCESSORIES

CORDLESS POLISHING MACHINES ACCESSORIES

	Designation	Art. No.	EAN	Can be used for	Set comprising
	Polishing Bonnets	20.930.95	4 006825 631517	CE-CB 18/254 Li	1 textile bonnet, 1 synthetic bonnet
	Polishing Bonnets / Abrasive Papers Set	20.932.33	4 006825 551846	CE-CP 18/180 Li E	2x synthetic bonnet, 1x foam pad, 6x abrasive paper (60 / 80 / 120 grit, 2 of each)

ELECTRIC PAINT SPRAY SYSTEMS ACCESSORIES

	Designation	Art. No.	EAN	Filling quantity	Packaging
	Paint Spray Attachment	42.600.03	4 006825 619515	800 ml	Colour box
	Paint Tub	42.600.02	4 006825 619508	1000 ml	Colour box
	Paint Tub	42.600.01	4 006825 619492	800 ml	Colour box



HOT GLUE GUNS ACCESSORIES

	Designation	Art. No.	EAN	Ø	Length	Number
	Glue Sticks	49538955	4 009315 389554	7 mm	150 mm	24 pcs
	Glue Sticks NEW	49539355	4 009315 393551	11 mm	200 mm	24 pcs



TACKER ACCESSORIES

	Designation	Art. No.	EAN	Type	Length	Width	Number
	Staples	49353508	4 009313 535083	53	8 mm	11.4 mm	1000 pcs
	Nails	49355614	4 009313 556149	47 / 55	14 mm	1.8 mm	1000 pcs

LASER TECHNOLOGY ACCESSORIES

	Designation	Art. No.	EAN	Working height	Weight	Tilt angle adjustment	Storage bag	Packaging
	Tripod	22.701.15	4 006825 616255	37 - 110 cm	0.5 kg	•	•	Colour box



STATIONARY SAWS ACCESSORIES

STATIONARY SAWS ACCESSORIES – SLIDING TABLE



ST 315

NEW

0° - 55°

TC-TS 315 U, TE-TS 315 U, TE-TS 315 UD

Angular adjustment

Suitable for

Article number

43.405.59



4 006825 648744

MITRE SAWS ACCESSORIES



E-Stand

340 - 445 mm

max. 410 mm

81 cm

Mounting width

Mounting depth

Working height

Article number

43.106.20



4 006825 584974

**MITRE SAWS AND TABLE SAWS ACCESSORIES**

Designation	Art. No.	EAN	Ø	Ø hole	Cutting width / blade thickness	Number of teeth	Saw blade type	Storage
TCT Saw Blade	49587151	4 009315 871516	200 mm	16 mm	2.4 mm / 1.6 mm	20	carbide tipped	–
TCT Thin Cut Blade	49587852	4 009315 878522	210 mm	30 mm	2.0 mm / 1.3 mm	40	carbide tipped	–
TCT Thin Cut Blade NEW	43.111.09	4 006825 635324	210 mm	30 mm	1.8 mm / 1.2 mm	40	carbide tipped	–
TCT Saw Blade	49587861	4 009315 878614	210 mm	30 mm	2.4 mm / 1.6 mm	48	carbide tipped	–
TCT Thin Cut Blade NEW	49587862	4 009315 878621	210 mm	30 mm	2.0 mm / 1.3 mm	64	carbide tipped	–
TCT Saw Blade Set 3-piece	49587805	4 009315 878058	210 mm	30 mm	2.5 mm / 1.6 mm	24 / 42 / 60	carbide tipped	Plastic tray
TCT Saw Blade NEW	49588261	4 009315 882611	216 mm	30 mm	2.4 mm / 1.6 mm	60	carbide tipped	–
TCT Saw Blade NEW	49588251	4 009315 882512	216 mm	30 mm	2.4 mm / 1.6 mm	48	carbide tipped	–
TCT Thin Cut Blade NEW	49589352	4 009315 893525	250 mm	30 mm	2.4 mm / 1.6 mm	42	carbide tipped	–
TCT Saw Blade	49589341	4 009315 893419	250 mm	30 mm	3.2 mm / 2.2 mm	24	carbide tipped	–
TCT Saw Blade	49589351	4 009315 893518	250 mm	30 mm	3.2 mm / 2.2 mm	48	carbide tipped	–
TCT Saw Blade	49589552	4 009315 895529	250 mm	30 mm	3.2 mm / 2.2 mm	60	carbide tipped	–
TCT Thin Cut Blade NEW	49589361	4 009315 893617	254 mm	30 mm	2.4 mm / 1.6 mm	40	carbide tipped	–
TCT Saw Blade NEW	49589551	4 009315 895512	254 mm	30 mm	3.2 mm / 2.2 mm	48	carbide tipped	–
TCT Saw Blade NEW	49589561	4 009315 895611	254 mm	30 mm	3.2 mm / 2.2 mm	60	carbide tipped	–
TCT Saw Blade	49593151	4 009315 931517	315 mm	30 mm	3.2 mm / 2.2 mm	48	carbide tipped	–
TCT Saw Blade Set 2-piece	49589305	4 009315 893051	250 mm	30 mm	3.2 mm / 2.2 mm	24 / 60	carbide tipped	Plastic tray
TCT Saw Blade Set 3-piece	49589306	4 009315 893068	250 mm	30 mm	3.2 mm / 2.2 mm	24 / 42 / 60	carbide tipped	Plastic tray
TCT Saw Blade	49592957	4 009315 929576	305 mm	30 mm	3.0 mm / 2.2 mm	40	carbide tipped	–

MITRE SAWS ACCESSORIES

MSS 1610	
Total length	1100 - 1610 mm
Load capacity	max 100 kg
Working height	845 - 945 mm
Load-bearing length of machine support	max. 455 mm
User-friendly adjustment facilities	•
Workpiece trays	•
Height-adjustable foot	•
Storage boxes	•
Foldable	•
Carry handle	•
Machine support	1 pair
Article number	43.106.15



4 006825 637496



STATIONARY PLANERS ACCESSORIES

	Designation	Art. No.	EAN	Can be used for	Length	Height	Thickness	Number
	Spare Blades	49568602	4 009315 686028	TH-SP 204, TC-SP 204	210 mm	17.2 mm	1.5 mm	2 pcs



SCROLL SAWS ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Length	Size	Can be used for
	Scroll Saw Blades Set	49316350	4 009313 163507	5 pcs	130 mm	1x size 1 (fine), 2x size 3 (medium), 1x size 4 (medium-rough), 1x size 11 (rough)	wood
	Scroll Saw Blades Set NEW	49316352	4 009313 163521	10 pcs	130 mm	0 (extra-fine)	wood
	Scroll Saw Blades Set NEW	49316359	4 009313 163590	5 pcs	130 mm	3 (medium), spiral-shaped, round tooth pattern	wood



BAND SAWS ACCESSORIES

	Designation	Art. No.	EAN	Length	Width	Number of teeth	Can be used for
	Saw Band	49081505	4 009310 815058	1400 mm	8 mm	6/25.4 mm	wood / metal
	Saw Band	49081509	4 009310 815096	2320 mm	13 mm	4/25.4 mm	wood / metal



WOODWORKING LATHES ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Comprising
	Pro Turning Tool Set	49455250	4 009314 552508	5-piece	Flat chisel, mortise chisel, gouge, round chisel, pointed chisel (1 of each)



WOODWORKING LATHES ACCESSORIES

	Designation	Art. No.	EAN	Mount	Gripping diameter outer jaws	Gripping diameter inner jaws	Product weight
	Four-Jaw Chuck	49455295	4 009314 552959	Inner thread M18	45 - 134 mm	18 - 52 mm	2.5 kg

	Designation	Art. No.	EAN	Hose length / Ø	Ø Adapter	Extractor adapter from 100 mm to 36 mm	Blind stopper
	Vacuum Adapter Set	41.380.00	4 006825 509564	1200 mm / 36 mm	100 mm	•	•

WET AND DRY VACUUM CLEANERS ACCESSORIES

	Designation	Art. No.	EAN	For tank volume	Scope of delivery	Can be used for
	Foam Filters 10 l	23.511.35	4 006825 641424	10 l	5 pcs	TE-VC 18/10 Li
	Dirt Bags 10 l	23.512.60	4 006825 641394	10 l	5 pcs	TE-VC 18/10 Li
	Fabric Filter	23.511.40	4 006825 231151	–	1 pcs	see list on page 141
	Foam Filters	23.511.32	4 006825 644098	–	5 pcs	see list on page 141
	Non-woven Bags 40 l	23.511.95	4 006825 625691	30 - 40 l	5 pcs	see list on page 141
	Non-woven Bags 25 l	23.511.90	4 006825 625684	20 - 25 l	5 pcs	see list on page 141
	Non-woven Bags 15 l	23.511.85	4 006825 625554	12 - 15 l	5 pcs	see list on page 141
	Dirt Bags 40 l	23.511.80	4 006825 607468	40 l	5 pcs	see list on page 141
	Dirt Bags 30 l	23.511.70	4 006825 528763	30 l	5 pcs	see list on page 141
	Dirt Bags 25 l	23.511.50	4 006825 231281	25 l	5 pcs	see list on page 141
	Dirt Bags 20 l	23.511.52	4 006825 236040	20 l	5 pcs	see list on page 141
	Dirt Bags 15 l	23.511.65	4 006825 623154	15 l	5 pcs	see list on page 141
	Dirt Bags 12 l	23.511.59	4 006825 606065	12 l	5 pcs	see list on page 141

WET AND DRY VACUUM CLEANERS ACCESSORIES


	Fine Ash Filter	Ash Filter
Capacity	18 l	12 l
Items supplied	1 pc	1 pc
Suction hose length	100 cm	100 cm
Suction hose diameter	36 mm	36 mm
Suitable for	see list on page 141	see list on page 141
Article number	23.516.12	23.516.06



WET AND DRY VACUUM CLEANERS ACCESSORIES



	Dual Dust Filter System	Pleated Filter	Pleated Filter with Lid
Items supplied	HEPA filter, dual filter bag (1x each)	1 pc	1 pc
HEPA class	H13 (> 0.3 µm)	–	–
Suitable for	see list on page 141	see list on page 141	see list on page 141
Article number	23.512.50	23.511.10	23.511.13



WET AND DRY VACUUM CLEANERS ACCESSORIES



	Long Crevice Nozzle	Small Universal Nozzle	Universal Floor Nozzle	Hard Upholstery Brush
For tank volume	–	–	–	–
Items supplied	1 pc	1 pc	1 pc	1 pc
Length	–	–	–	–
Diameter	–	–	–	–
Suitable for	see list on page 141	see list on page 141	see list on page 141	see list on page 141
Article number	23.512.05	23.512.10	23.512.15	23.512.20



WET AND DRY VACUUM CLEANERS ACCESSORIES



	Soft Upholstery Brush	Round Carpet Brush	Set of Nozzles I	Set of Nozzles II
For tank volume	–	–	–	–
Items supplied	1 pc	1 pc	2 nozzles, 1 brush	2 brushes, 1 nozzle
Length	–	–	–	–
Diameter	–	–	–	–
Suitable for	see list on page 141	see list on page 141	see list on page 141	see list on page 141
Article number	23.512.25	23.512.30	23.512.35	23.512.55



WET AND DRY VACUUM CLEANERS ACCESSORIES



	Car Cleaning Set	Extension Hose	Accessories Kit
For tank volume	–	–	–
Items supplied	4-piece	1 hose, 4 adapters	5 pcs
Length	–	3 m	2 m
Diameter	–	36 mm	64 mm
Suitable for	see list on page 141	see list on page 141	see list on page 141
Article number	23.512.45	23.620.00	23.620.10



ASSIGNMENT OF ACCESSORIES TO WET AND DRY VACUUM CLEANERS

- Use possible
 - Restricted use possible
 - Use not possible

ASH VACUUM CLEANERS ACCESSORIES



	Screw-on Pleated Filter AV	Pre-Filter AV	NEW
Items supplied	1 pc	1 pc	
Suitable for	TC-AV 1620 DW / TC-AV 1618 D	TC-AV 1620 DW / TC-AV 1618 D	
Article number	23.513.10	23.513.15	

A standard linear barcode representing the number 4 006825 640946.

COMPRESSED AIR ACCESSORIES

	Designation	Art. No.	EAN	Type	Length	Width	Number	Can be used for	Packaging
	Staples	41.378.61	4 006825 505788	E, chisel points	40 mm	5.7 mm	3000 pcs	all Einhell air staplers/nailers	Colour box
	Staples	41.378.60	4 006825 504446	E, chisel points	25 mm	5.7 mm	3000 pcs		Colour box
	Staples	41.378.55	4 006825 504439	E, chisel points	16 mm	5.7 mm	3000 pcs		Colour box
	Staples	41.378.50	4 006825 504422	E, chisel points	13 mm	5.7 mm	3000 pcs		Colour box
	Nails	41.378.73	4 006825 505795	J	50 mm	–	3000 pcs	all Einhell air staplers/nailers	Colour box
	Nails	41.378.72	4 006825 504866	J	40 mm	–	3000 pcs		Colour box
	Nails	41.378.71	4 006825 504460	J	25 mm	–	3000 pcs		Colour box


COMPRESSED AIR ROTATING SANDERS ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Ø	Grit size	With holes	Can be used for
	Abrasives Paper Set NEW	49492095	4 009314 920956	5 pcs	150 mm	80	•	TC-PE 150


COMPRESSED AIR HAMMERS ACCESSORIES

	Designation	Art. No.	EAN	Scope of delivery	Can be used for	Packaging
	Needle Scaler Attachment NEW	41.331.20	4 006825 645873	1 pc	TC-PC 45 / TC-PC 45 Set	Colour box

COMPRESSED AIR ACCESSORIES

	Designation	Art. No.	EAN	Properties	Packaging
	Fabric Hose	41.382.10	4 006825 574166	Length 15 m, Ø internal: 9 mm	Shrink film
	Fabric Hose	41.382.00	4 006825 410099	Length 15 m, Ø internal: 6 mm	Shrink film
	Fabric Hose	41.381.00	4 006825 410082	Length 10 m, Ø internal: 6 mm	Shrink film
	Spiral Hose	41.394.20	4 006825 411744	Length 8 m, Ø internal: 6 mm	Shrink film
	Spiral Hose	41.394.10	4 006825 411737	Length 4 m, Ø internal: 6 mm	Shrink film
	Automatic Hose Roller	41.380.00	4 006825 509564	Length 9 m + 1 m, working pressure: up to 12 bar	Colour box
	Inflation Adapter Kit	41.396.95	4 006825 511475	8-piece	Colour box
	Mini Oiler	41.350.02	4 006825 581614	R 1/4" internal thread, R 1/4" external thread	Blister
	Filter + Pressure Reducer	41.342.00	4 006825 410051	Complete with nipple and quick-lock coupling R 1/4"	Colour box
	Filter + Pressure Reducer	41.341.00	4 006825 410044	Complete with nipple and quick-lock coupling R 3/8"	Colour box
	Combination Conditioning Unit	41.350.01	4 006825 410181	Complete with oiler, nipple and quick-lock coupling R 1/4"	Colour box
	Combination Conditioning Unit	41.350.00	4 006825 410075	Complete with oiler, nipple and quick-lock coupling R 3/8"	Colour box

COMPRESSED AIR ACCESSORIES

	Designation	Art. No.	EAN	Properties	Packaging
	Michelin Nipple	41.393.30	 4 006825 588712	Ø 6 mm	Blister
	Quick-lock Coupling	41.392.06	 4 006825 410334	R 1/4" internal thread	Blister
	Quick-lock Coupling	41.392.07	 4 006825 560824	R 1/4" external thread	Blister
	Quick-lock Coupling	41.392.05	 4 006825 410327	R 3/8" internal thread	Blister
	Quick-lock Coupling	41.392.08	 4 006825 560831	R 3/8" external thread	Blister
	Quick-lock Coupling	41.392.10	 4 006825 599046	R 1/2" internal thread	Blister
	Quick-lock Coupling	41.392.09	 4 006825 596939	R 1/2" external thread	Blister
	Quick-lock Coupling	41.393.01	 4 006825 581638	Ø 6 mm	Blister
	Quick-lock Coupling	41.393.02	 4 006825 581645	Ø 9 mm	Blister
	Distributor	41.396.80	 4 006825 411713	2 quick-lock couplings 3/8" IT	Blister
	Hose Nozzle	41.396.65	 4 006825 581676	Ø 6 mm, R 1/4" ET	Blister
	Hose Nozzle	41.396.66	 4 006825 581669	Ø 6 mm, R 3/8" ET	Blister
	Threaded Nipple	41.396.55	 4 006825 562347	R 1/4" external thread	Blister
	Threaded Nipple	41.396.50	 4 006825 411683	R 3/8" external thread	Blister
	Threaded Nipple	41.396.40	 4 006825 411676	R 1/4" internal thread	Blister
	Threaded Nipple	41.396.45	 4 006825 581683	R 3/8" internal thread	Blister
	Grommet	41.396.60	 4 006825 411690	Ø 6 mm	Blister
	Grommet	41.396.61	 4 006825 581621	Ø 9 mm	Blister
	Double Nipple	41.396.20	 4 006825 411652	R 1/4" external thread	Blister
	Double Nipple	41.396.10	 4 006825 411645	R 3/8" external thread	Blister
	Reduction	41.396.00	 4 006825 411621	R 3/8" ET – R 1/4" IT	Blister
	Reduction	41.396.30	 4 006825 411669	R 3/8" ET – R 1/4" ET	Blister
	Reduction	41.396.05	 4 006825 562330	R 1/2" ET – R 3/8" IT	Blister
	Hose Connection Tube	41.393.10	 4 006825 411720	Ø 6 mm	Blister
	Hose Connection Tube	41.393.20	 4 006825 581652	Ø 9 mm	Blister
	Hose Connector Kit	41.395.00	 4 006825 410136	Ø 6 mm	Blister
	Clip Kit	41.396.70	 4 006825 411706	5 pcs, 8 - 12 mm	Blister
	Special Compressed Air Oil	41.383.10	 4 006825 411270	500 ml	Plastic bottle

ASSIGNMENT OF AIR TOOLS

- Use possible

- Use not possible



STONE CUTTING MACHINES AND TILE CUTTING MACHINES ACCESSORIES

STONE CUTTING MACHINES AND TILE CUTTING MACHINES ACCESSORIES						
	Designation	Art. No.	EAN	Ø	Ø hole	Rim shape Diamond Cutting Wheel
	Diamond Cutting Wheel	49795850	4 009317 958505	180 mm	25.4 mm	Continuous rim
	Diamond Cutting Wheel NEW	49795855	4 009317 958550	200 mm	25.4 mm	Continuous rim
	Turbo Diamond Cutting Wheel	49797650	4 009317 976509	180 mm	25.4 mm	Turbo
	Turbo Diamond Cutting Wheel	49797750	4 009317 977506	200 mm	25.4 mm	Turbo
	Turbo Diamond Cutting Wheel	49797851	4 009317 978510	250 mm	25.4 mm	Turbo
	Turbo Diamond Cutting Wheel	49797950	4 009317 979500	300 mm	25.4 mm	Turbo

STATIONARY GRINDERS ACCESSORIES

BENCH GRINDERS ACCESSORIES								
	Designation	Art. No.	EAN	Ø	Ø hole	Wheel thickness	Grit size	Reducing rings
	Polishing Wheel	49507045	4 009315 070452	75 mm	10 mm	20 mm	400	–
	Grinding Wheel	49507125	4 009315 071251	75 mm	10 mm	20 mm	120	–
	Grinding Wheel	49507465	4 009315 074658	150 mm	32 mm	16 mm	60	12.7 / 16 / 20 / 25 mm
	Grinding Wheel	49507435	4 009315 074351	150 mm	32 mm	16 mm	36	12.7 / 16 / 20 / 25 mm
	Grinding Wheel	49507565	4 009315 075655	150 mm	32 mm	20 mm	60	12.7 / 16 / 20 / 25 mm
	Grinding Wheel	49507535	4 009315 075358	150 mm	32 mm	20 mm	36	12.7 / 16 / 20 / 25 mm
	Grinding Wheel	49507885	4 009315 078854	200 mm	32 mm	40 mm	80	12.7 / 16 / 20 / 25 mm
	Grinding Wheel	49507765	4 009315 077659	200 mm	32 mm	25 mm	60	12.7 / 16 / 20 / 25 mm
	Grinding Wheel	49507735	4 009315 077352	200 mm	32 mm	25 mm	36	12.7 / 16 / 20 / 25 mm
	Leather Honing Wheel NEW	49507885	4 009315 078854	175 mm	32 mm	20 mm	–	12.7 / 16 / 20 / 25 mm

BENCH GRINDERS ACCESSORIES					
Designation	Art. No.	EAN	Items supplied	Can be used for	Packaging
Accessories Set NEW	49510951	4 009315 109510	30-piece	bench grinders	Storage box

**STATIONARY GRINDERS ACCESSORIES**

	Designation	Art. No.	EAN	Dimensions	Number	Grit size
	Grinding Belt Set	49910805	4 009319 108052	686 x 50 mm	5	2x 60 grit, 2x 80 grit, 1x 120 grit
	Grinding Belt Set	49914605	4 009319 146054	914 x 100 mm	3	60 grit, 80 grit, 120 grit (1 of each)
	Grinding Belt Set NEW	49915005	4 009319 150051	1219 x 152 mm	3	60 grit, 80 grit, 120 grit (1 of each)
	Grinding Paper Set	49492074	4 009314 920741	Ø 150 mm	3	80 grit

**BENCH DRILLS ACCESSORIES**

	Designation	Art. No.	EAN	Jaw width	Clamping range	Slot spacing
	Bench Vice NEW	49777015	4 009317 770152	75 mm	max. 68 mm	110 mm from mid-point to mid-point

**METAL CUTTING SAWS ACCESSORIES**

	Designation	Art. No.	EAN	Ø	Ø hole	Thickness
	Cutting Wheel	49791975	4 009317 919759	355 mm	25.4 mm	3.2 mm

POWER TOOLS ACCESSORIES**Petrol and Oil Suction Pump**

Suction hose length	1.3 m
Tank volume	1.6 l
Article number	34.070.00



4 006825 547276

SALES SUPPORT

POS | SHOP IN SHOP SYSTEM



■ **Flagship Shop in Shop Concept**
(according to catalog
'Modular display concept')

PRINT PRODUCTS



■ Flyers / Folders



■ Brochures

POS | PERMANENT SECONDARY DISPLAYS



■ Modular Display 'Power X-Change Garden'
120 x 80 cm
(according to catalog 'Modular display concept')



■ Modular Display 'Power X-Change Power Tools'
120 x 80 cm
(according to catalog 'Modular display concept')



■ Wall display 'Power X-Change Tools + Power Tools'
(according to catalog 'Prime wall display concept')

POWER TOOLS 2020

Is there anything you'd like to ask us about our products?
Would you like to order a part?
Your product isn't working as it should?
We're at your service!
We'll get you some help – fast and without any fuss.

**Einhell-Service**

Eschenstr. 6
94405 Landau/Isar
Deutschland



+ 49 (0) 9951 959 2000



+ 49 (0) 9951 959 1700



www einhell-service.de



@ service-DE@einhell.com

Einhell Germany AG
Wiesenweg 22
94405 Landau / Isar – Germany
info@einhell.de – www.einhell.de